SCHEMATIC	
MODEL NO	E

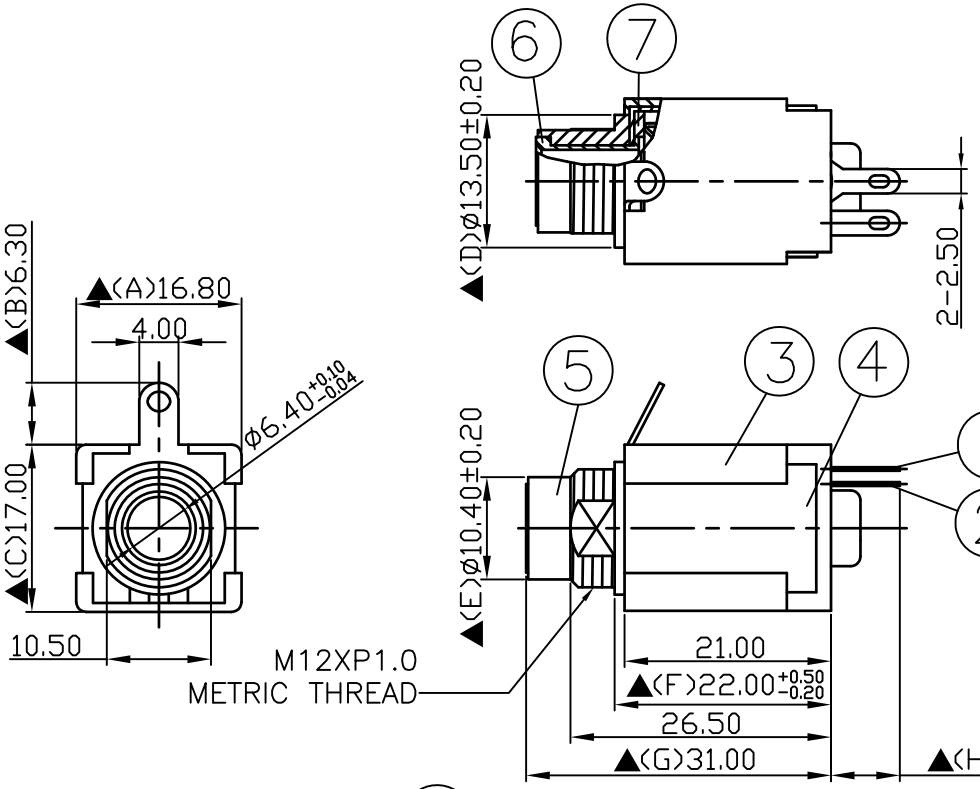

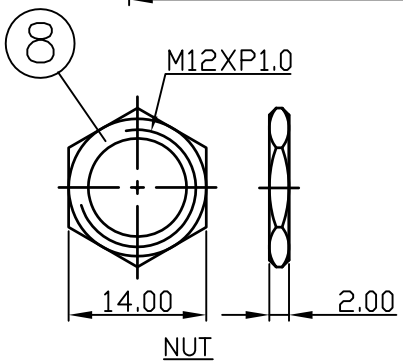

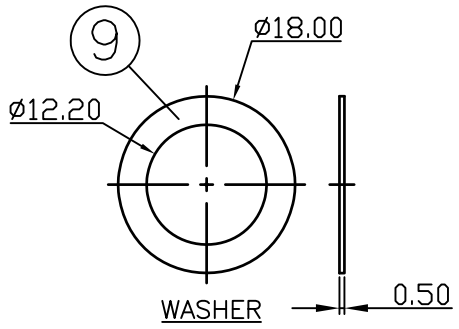

NO.	Description	Material	Q'TY	Finish
9	Washer	0.5T Steel	1	Nickel Plated
8	Nut	2.0T Steel	1	Nickel Plated
7.	Insulator	Red Vulcanited Fibre	1	Red Color
6.	Bushing	Low Lead Brass Rod	1	Nickel Plated
5.	Barre(W/Thread)	POM	1	Black Color
4.	Cover	0.5T Steel	1	Nickel Plated
3.	Housing	POM	1	Black Color
2.	Break Terminal	0.4T Brass	1	Silver Plated
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.27.2021	王平華			

PART NAME :6.3ø PHONE JACK	PART NUMBER: SCJ618R0NES1B21L	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension