
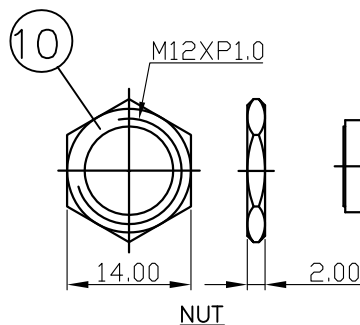
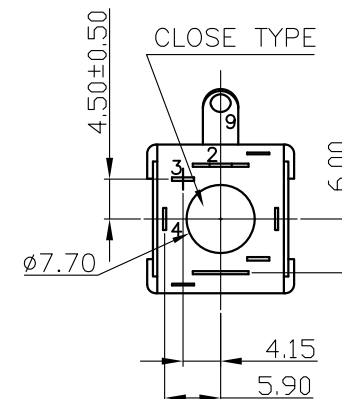
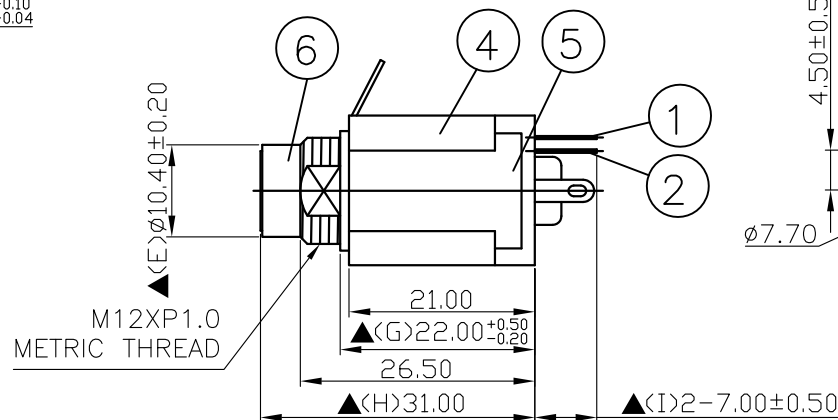
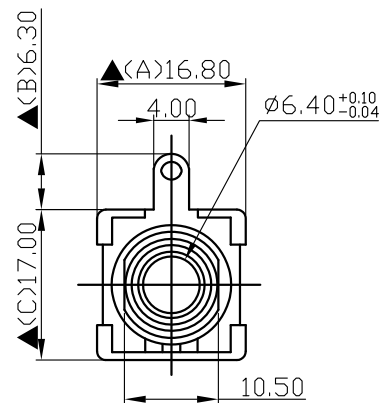


11	Washer	0.5T Steel	1	Nickel Plated
10	Nut	2.0T Steel	1	Nickel Plated
9	Insulator	POM	1	Ivory Color
8	Insulator	Red Vulcanited Fibre	1	Red Color
7	Bushing	Low Lead Brass Rod	1	Nickel Plated
6	Barre(W/Thread)	POM	1	Black Color
5	Cover	0.5T Steel	1	Nickel Plated
4	Housing	POM	1	Black Color
3	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2	Transfer Terminal	0.4T Brass	1	Silver Plated
1	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

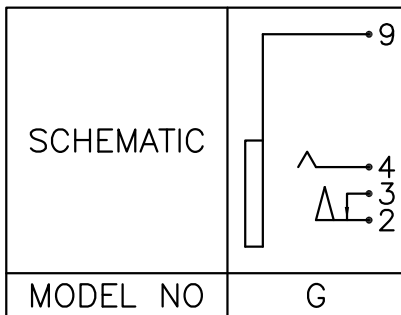

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.27.2021	王平華			

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ618R0NGS1B21L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant