

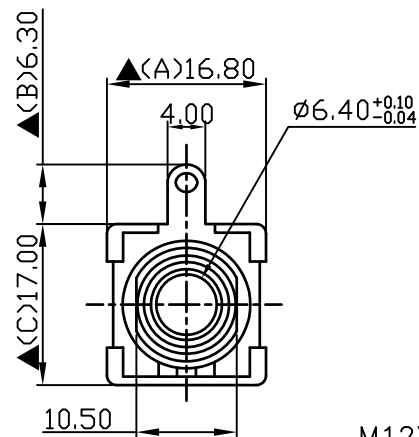
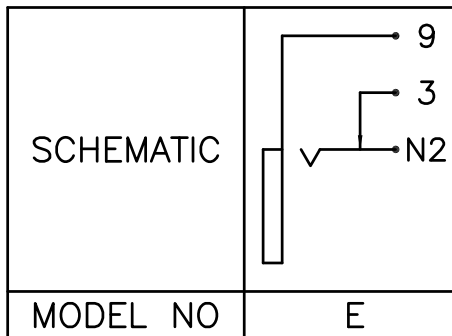

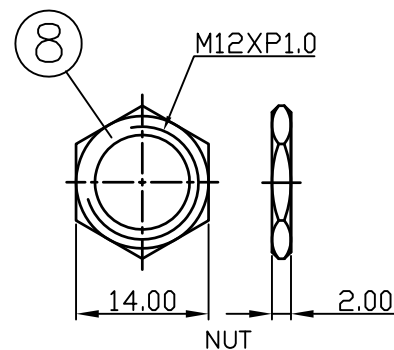
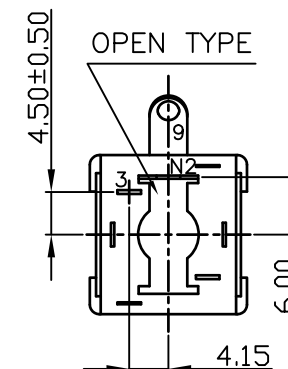


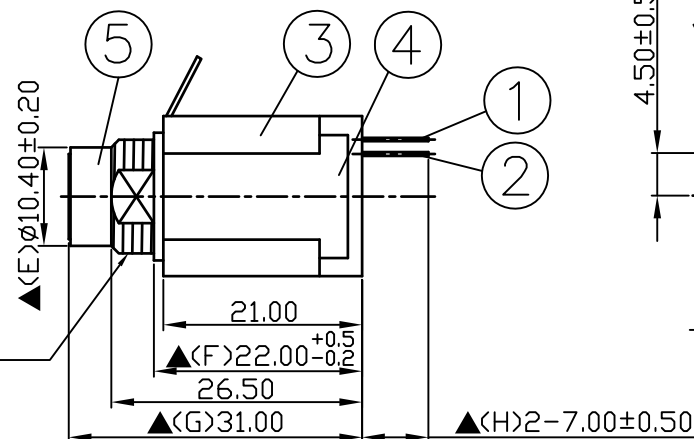

M12XP1.0
METRIC THREAD

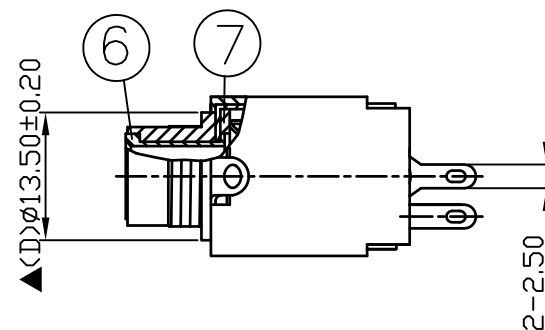

9	Washer	0.5T Steel	1	Nickel Plated
8	Nut	2.0T Steel	1	Nickel Plated
7.	Insulator	Red Vulcanited Fibre	1	Red Color
6.	Bushing	Low Lead Brass Rod	1	Nickel Plated
5.	Barre(W/Thread)	POM	1	Black Color
4.	Cover	0.5T Steel	1	Nickel Plated
3.	Housing	POM	1	Black Color
2.	Break Terminal	0.4T Brass	1	Silver Plated
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD. 旭 全	DATE	DWN	CHKD	APVD	MANAGER
	07.26.2021	王平華			

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ618R0NES1B11L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant