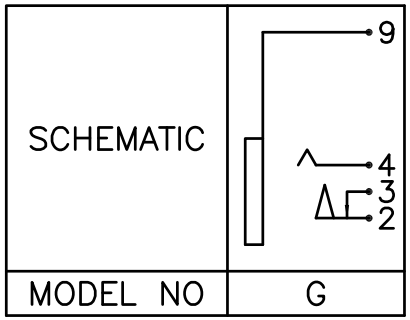


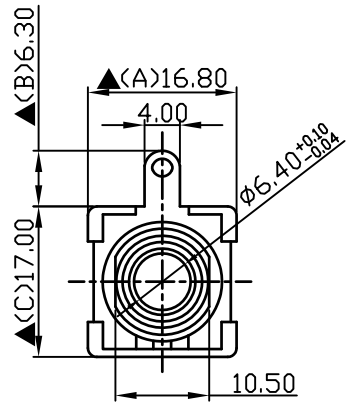


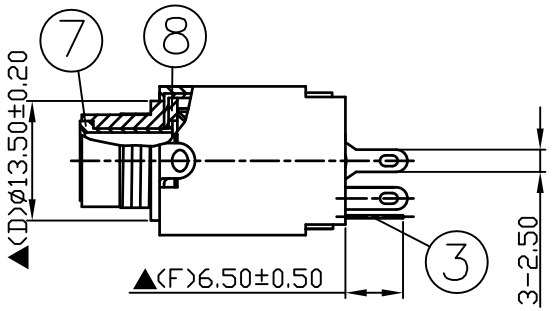


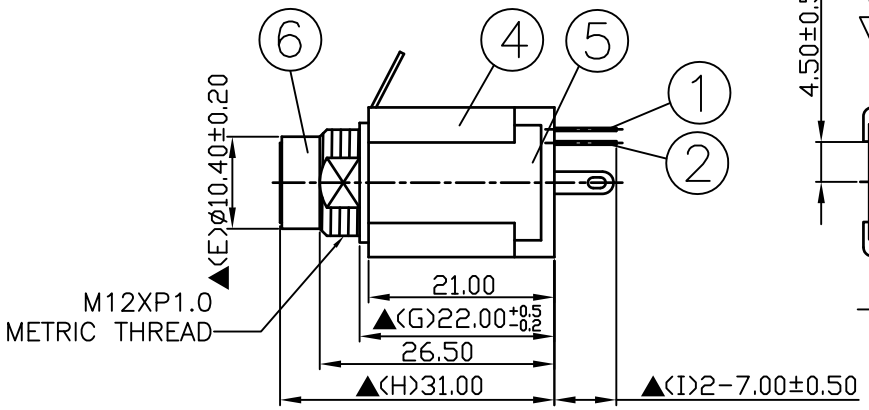


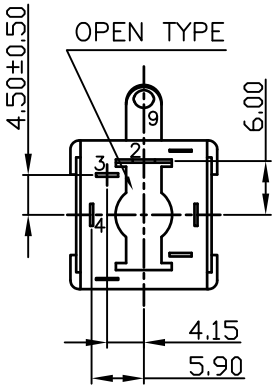


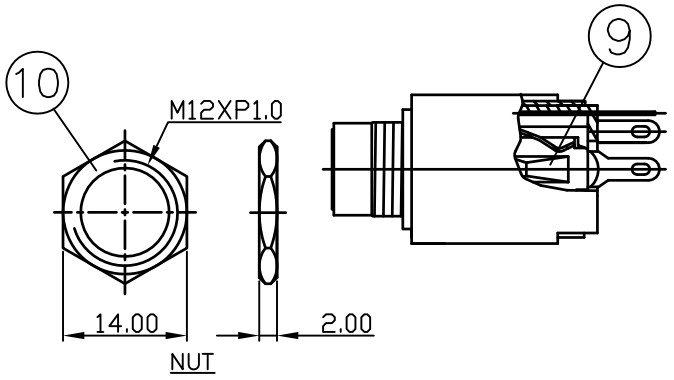


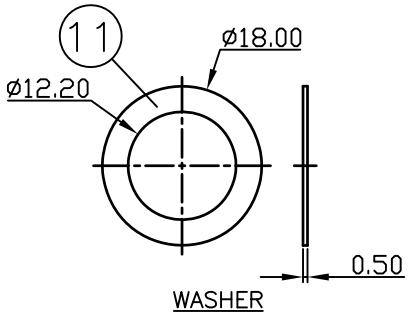


| NO. | Description | Material | Q'TY | Finish |
|---|---|---|---|---|
| 11 | Washer | 0.5T Steel | 1 | Nickel Plated |
| 10 | Nut | 2.0T Steel | 1 | Nickel Plated |
| 9 | Insulator | POM | 1 | Ivory Color |
| 8 | Insulator | Red Vulcanited Fibre | 1 | Red Color |
| 7. | Bushing | Low Lead Brass Rod | 1 | Nickel Plated |
| 6. | Barre(W/Thread) | POM | 1 | Black Color |
| 5. | Cover | 0.5T Steel | 1 | Nickel Plated |
| 4. | Housing | POM | 1 | Black Color |
| 3. | Tip Spring | 0.35T Phosphor Bronze | 1 | Silver Plated |
| 2. | Transfer Terminal | 0.4T Brass | 1 | Silver Plated |
| 1. | Break Terminal | 0.35T Phosphor Bronze | 1 | Silver Plated |

S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE | DWN | CHKD | APVD | MANAGER |
|---|---|---|---|---|
| 07.26.2021 | 王平華 | | | |

PART NAME :6.3ø PHONE JACK | PART NUMBER:SCJ618R0NGS1B11L | VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm | SCALE:1/1

For Redference
僅供參考

RoHS&SVHC Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: : The Most Important Dimension