

A

B

C

D







E

SCHEMATIC

MODEL NO

N6

I

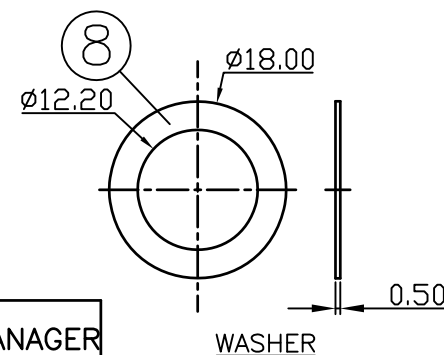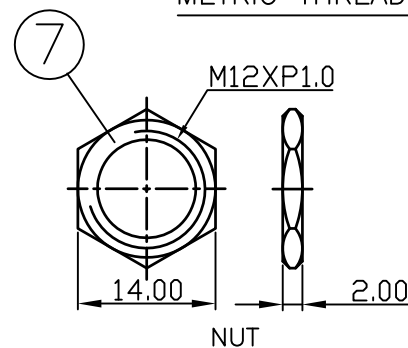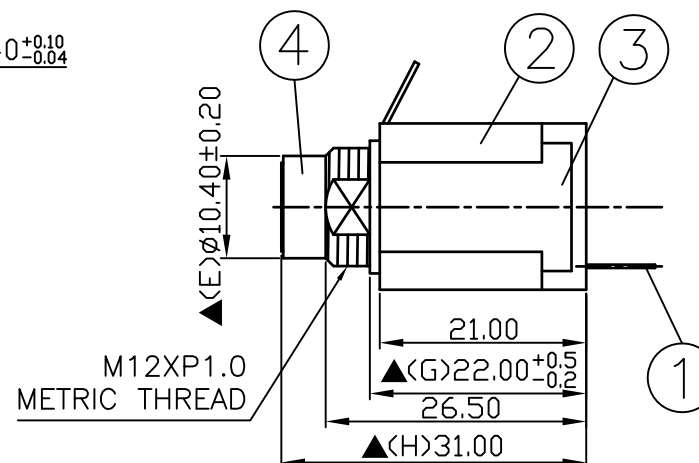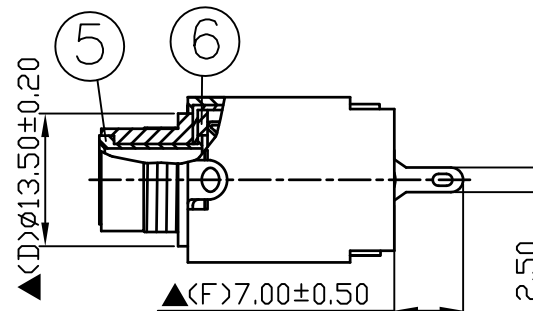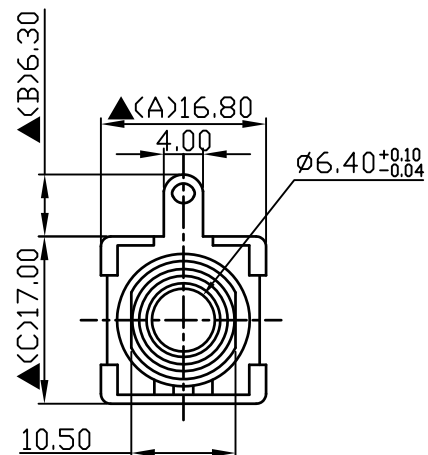

8	Washer	0.5T Steel	1	Nickel Plated
7.	Nut	2.0T Steel	1	Nickel Plated
6.	Insulator	Red Vulcanited Fibre	1	Red Color
5.	Bushing	Low Lead Brass Rod	1	Nickel Plated
4.	Barre(W/Thread)	POM	1	Black Color
3.	Cover	0.5T Steel	1	Nickel Plated
2.	Housing	POM	1	Black Color
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.26.2021	王平華			

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ618RONIS1B11L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Compliant