

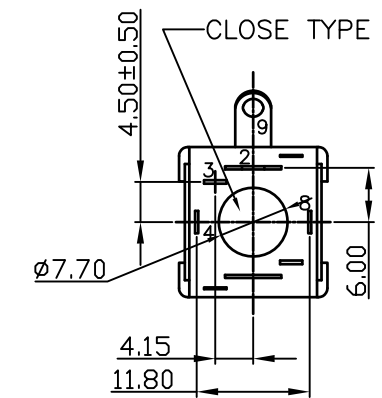
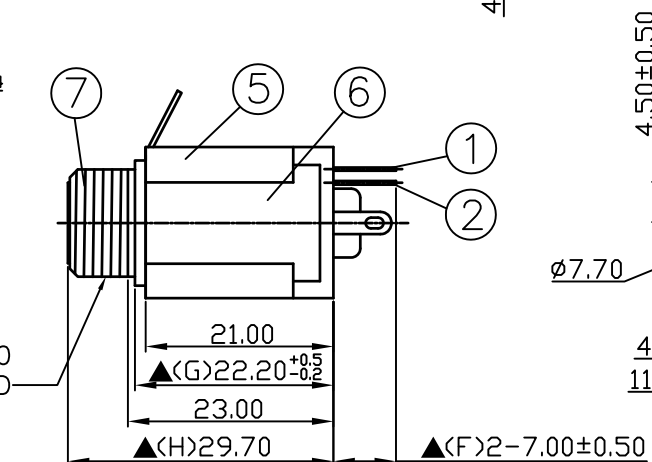
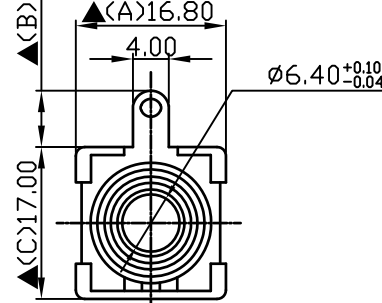
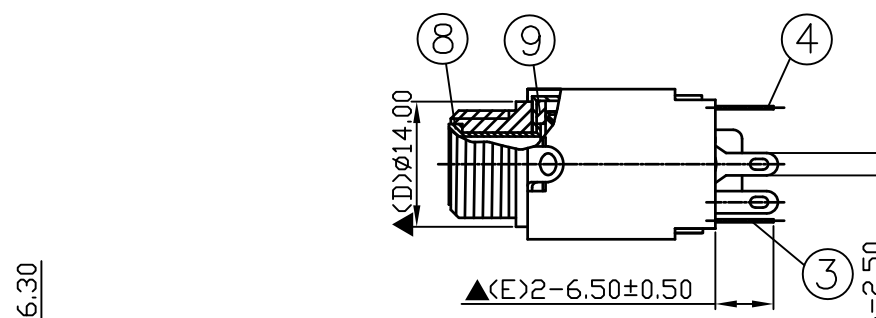
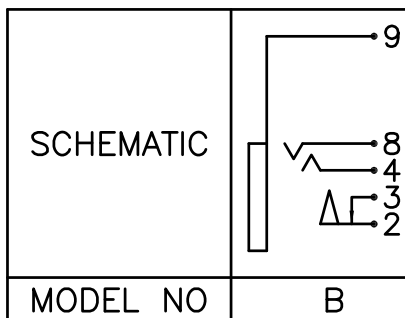


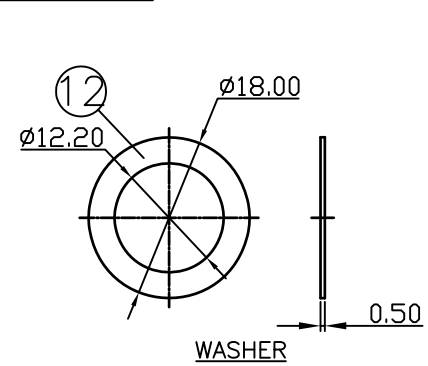

12	Washer	0.5T Steel	1	Nickel Plated
11.	Nut	2.0T Steel	1	Nickel Plated
10.	Insulator	POM	1	Ivory Color
9.	Insulator	Red Vulcanited Fibre	1	Red Color
8.	Bushing	Low Lead Brass Rod	1	Nickel Plated
7.	Barre(W/Thread)	POM	1	Black Color
6.	Cover	0.5T Steel	1	Nickel Plated
5.	Housing	POM	1	Black Color
4.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

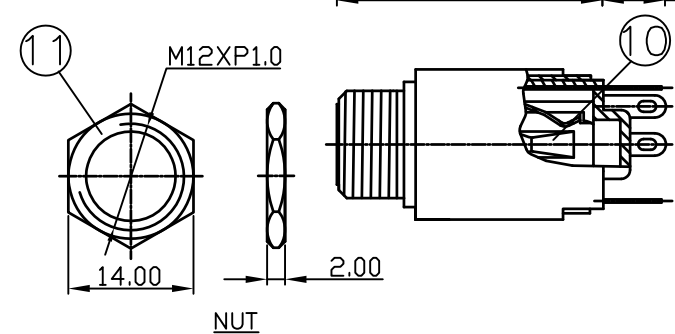

DATE		DWN	CHKD	APVD	MANAGER
07.28.2021		王平華			

PART NAME : 6.3ø PHONE JACK	PART NUMBER: SCJ618R3NBS1B21L	VERSION: 1.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考
RoHS&SVHC
Compliant