

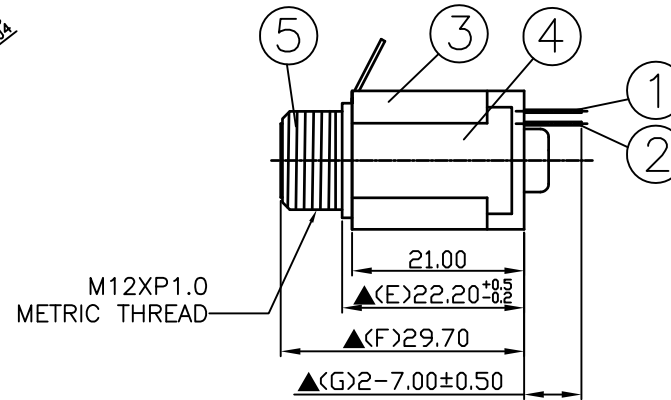

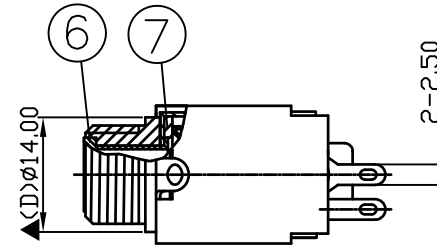
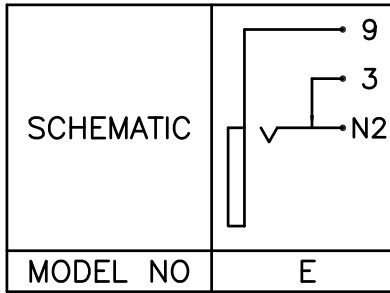


9	Washer	0.5T Steel	1	Nickel Plated
8	Nut	2.0T Steel	1	Nickel Plated
7	Insulator	Red Vulcanited Fibre	1	Red Color
6	Bushing	Low Lead Brass Rod	1	Nickel Plated
5	Barre(W/Thread)	POM	1	Black Color
4	Cover	0.5T Steel	1	Nickel Plated
3	Housing	POM	1	Black Color
2	Break Terminal	0.4T Brass	1	Silver Plated
1	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD. 旭 全	DATE	DWN	CHKD	APVD	MANAGER
	07.28.2021	王平華			

PART NAME : 6.3ø PHONE JACK	PART NUMBER: SCJ618R3NES1B21L	VERSION: 2.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant