


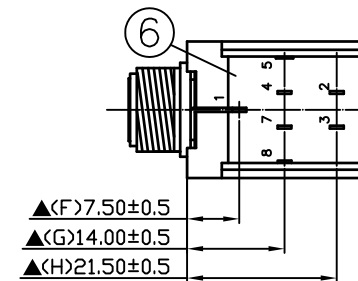
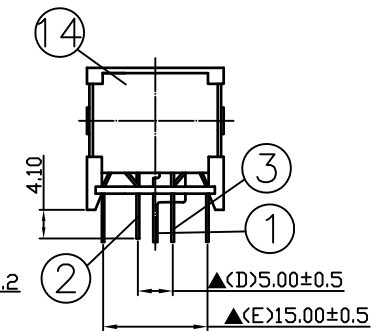
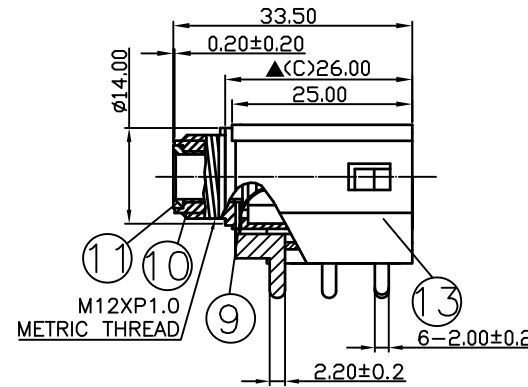





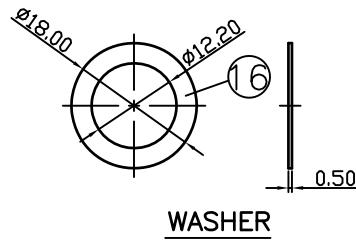

16.	Washer	0.5T Steel	1	Nickel Plated
15.	Nut	2.0T Steel	1	Nickel Plated
14.	Cover	PBT+15%	1	Black Color
13.	Housing	POM	1	Black Color
12.	Insulator	POM	2	Black Color
11.	Bushing	Low Lead Brass Rod	1	Nickel Plated
10.	Barre	POM	1	Black Color
9.	Earth Spring	0.2T Phosphor Bronze	1	Nickel Plated
8.	Transfer Terminal	0.35T Phosphor Bronze	1	Silver Plated
7.	Break Terminal	0.4T Brass	1	Silver Plated
6.	Guide Plate	1.0T Bakelite	1	Natural
5.	Transfer Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Ring Terminal	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Sleeve Terminal	0.5T Steel	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.23.2022	王平華			

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ628R3NCS1B00L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: /

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant