



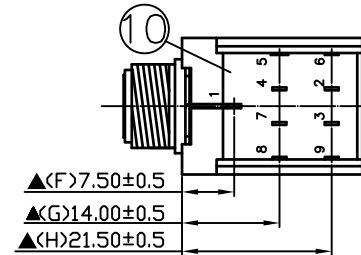
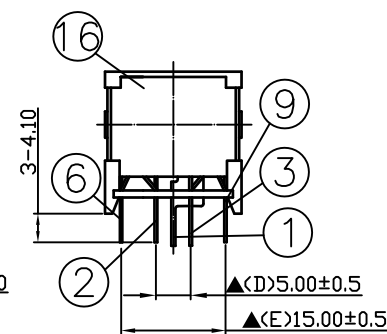


WASHER

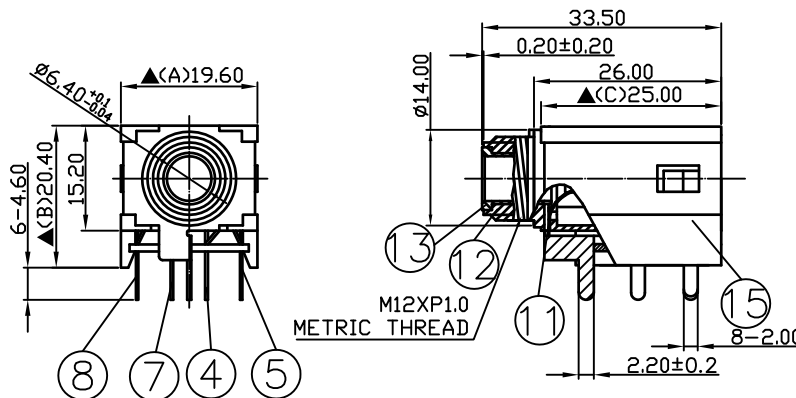

NUT



Pin Hole Layout
(Jack Bottom View)

18.	Washer	0.5T Steel	1	Nickel Plated
17.	Nut	2.0T Steel	1	Nickel Plated
16.	Cover	PBT+15%	1	Black Color
15.	Housing	POM	1	Black Color
14.	Insulator	POM	2	Black Color
13.	Bushing	Low Lead Brass Rod	1	Nickel Plated
12.	Barre	POM	1	Black Color
11.	Earth Spring	0.2T Phosphor Bronze	1	Nickel Plated
10.	Guide Plate	1.0T Bakelite	1	Natural
9.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
8.	Transfer Terminal	0.35T Phosphor Bronze	1	Silver Plated
7.	Break Terminal	0.4T Brass	1	Silver Plated
6.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
5.	Transfer Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Ring Terminal	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Sleeve Terminal	0.5T Steel	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

 S.C. PRECISION INDUSTRIAL CO., LTD. 旭 全	DATE	DWN	CHKD	APVD	MANAGER
	03.23.2022	王平華			

PART NAME :6.3ø PHONE JACK	PART NUMBER:SCJ628R3NDS1B00L	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm 	SCALE:/

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant