

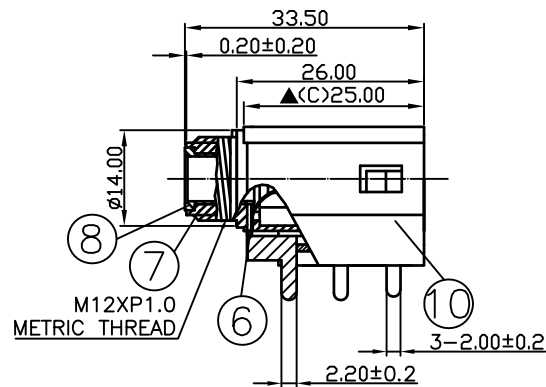



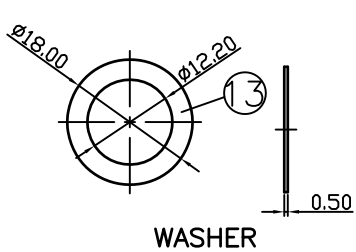


Pin Hole Layout  
(Jack Bottom View)

| 13. | Washer            | 0.5T Steel            | 1    | Nickel Plated |
|-----|-------------------|-----------------------|------|---------------|
| 12. | Nut               | 2.0T Steel            | 1    | Nickel Plated |
| 11. | Cover             | PBT+15%               | 1    | Black Color   |
| 10. | Housing           | POM                   | 1    | Black Color   |
| 9.  | Insulator         | POM                   | 1    | Black Color   |
| 8.  | Bushing           | Low Lead Brass Rod    | 1    | Nickel Plated |
| 7.  | Barre             | POM                   | 1    | Black Color   |
| 6.  | Earth Spring      | 0.2T Phosphor Bronze  | 1    | Nickel Plated |
| 5.  | Transfer Terminal | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 4.  | Break Terminal    | 0.4T Brass            | 1    | Silver Plated |
| 3.  | Guide Plate       | 1.0T Bakelite         | 1    | Natural       |
| 2.  | Tip Terminal      | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Sleeve Terminal   | 0.5T Steel            | 1    | Nickel Plated |
| NO. | Description       | Material              | Q'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 03.23.2022 | 王平華 |      |      |         |

For Redference  
僅供參考

RoHS&SVHC  
Compliant

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ628R3NGS1B00L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: /

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension