



A

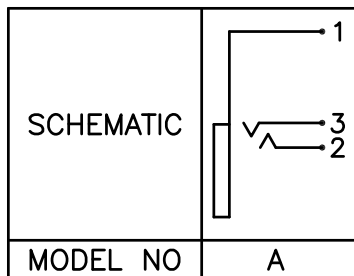


B

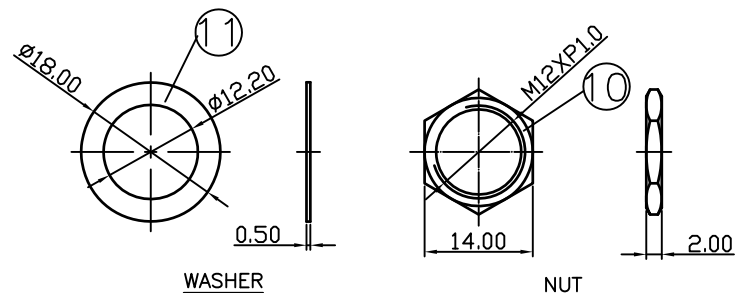

C

11.	Washer	0.5T Steel	1	Nickel Plated
10.	Nut	2.0T Steel	1	Nickel Plated
9.	Cover	PBT+15%	1	Black Color
8.	Housing	POM	1	Black Color
7.	Bushing	Low Lead Brass Rod	1	Nickel Plated
6.	Barre	POM	1	Black Color
5.	Earth Spring	0.2T Phosphor Bronze	1	Nickel Plated
4.	Guide Plate	1.0T Bakelite	1	Natural
3.	Ring Terminal	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Sleeve Terminal	0.5T Steel	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

D

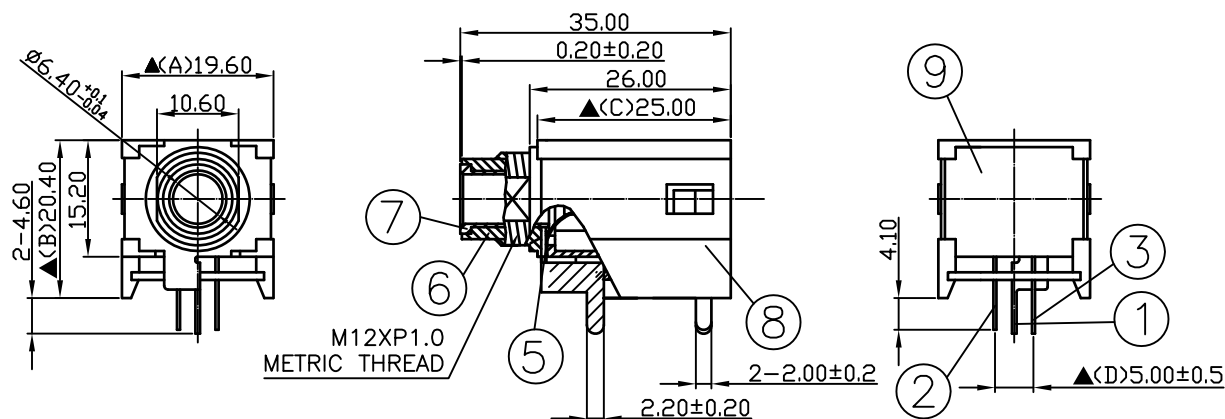

E



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.23.2022	王平華			

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ628RONAS1B00L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: /

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant

Pin Hole Layout
(Jack Bottom View)

