





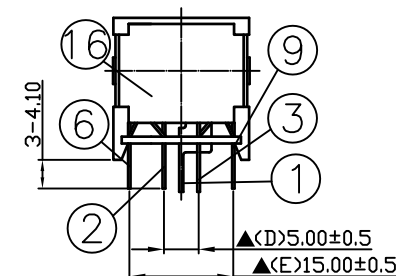


A


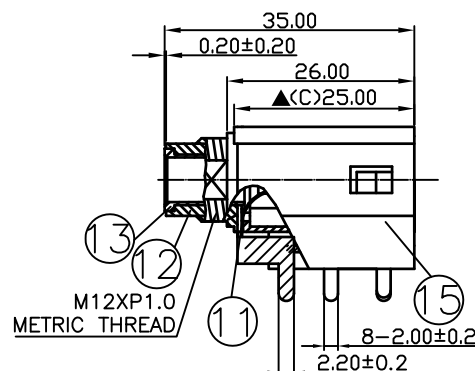


B

18.	Washer	0.5T Steel	1	Nickel Plated
17.	Nut	2.0T Steel	1	Nickel Plated
16.	Cover	PBT+15%	1	Black Color
15.	Housing	POM	1	Black Color
14.	Insulator	POM	2	Black Color
13.	Bushing	Low Lead Brass Rod	1	Nickel Plated
12.	Barre	POM	1	Black Color
11.	Earth Spring	0.2T Phosphor Bronze	1	Nickel Plated
10.	Guide Plate	1.0T Bakelite	1	Natural
9.	Transfer Terminal	0.2T Phosphor Bronze	1	Silver Plated
8.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.4T Brass	1	Silver Plated
6.	Break Terminal	0.2T Phosphor Bronze	1	Silver Plated
5.	Transfer Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Ring Terminal	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Sleeve Terminal	0.5T Steel	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

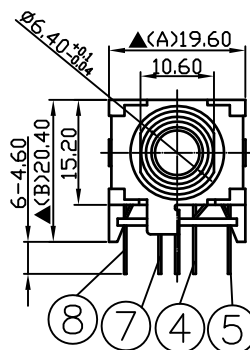

D



Pin Hole Layout
(Jack Bottom View)

E



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.23.2022	王平華			

For Redference
僅供參考

RoHS&SVHC
Compliant

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ628R0NDS1B00L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: /

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension