

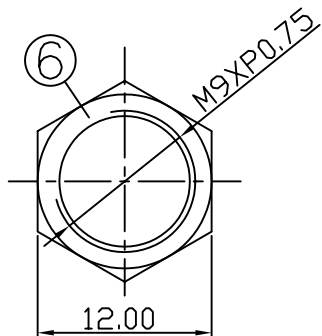


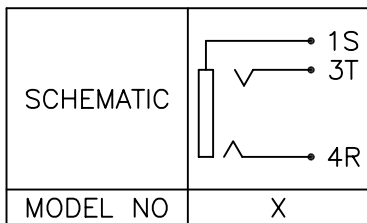

Nut



④

⑤

③

②

▲(E)8.00±0.10


▲(F)27.00±0.10

1.00±0.10


23.00±0.10

▲(C)0.50±0.10

▲(D)6.50±0.10

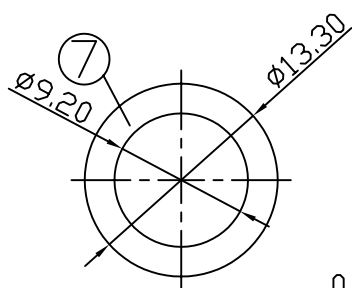

Washer

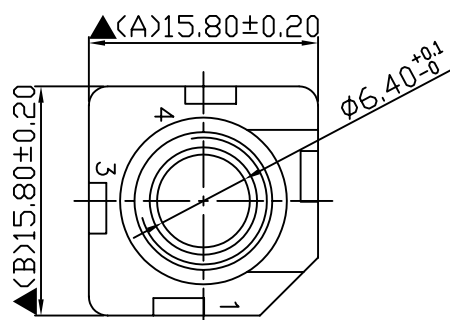

M9XP0.75 METRIC THREAD

▲(E)8.00±0.10

▲(F)27.00±0.10

1.00±0.10

23.00±0.10


▲(C)0.50±0.10

▲(D)6.50±0.10

3-2.00±0.10

▲(H)0.50±0.10

▲(T)6.50±0.10

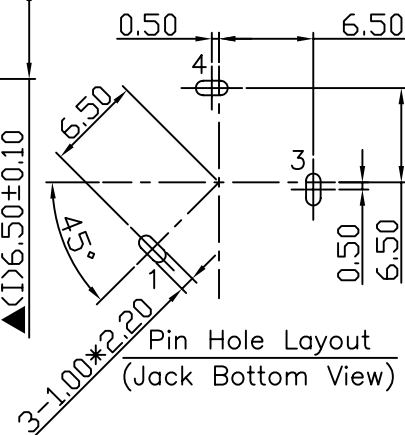

Pin Hole Layout
(Jack Bottom View)

7.	Washer	0.5T Steel	1	Nickel Plated
6.	Nut	2.0T Steel	1	Nickel Plated
5.	Housing	PBT	1	Black Color
4.	Barrel	Brass	1	Nickel Plated
3.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		10.12.2011				

PART NAME : 6.3ø PHONE JACK	PART NUMBER: SCJ648M2NXS3B00G	VERSION: 2.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考