


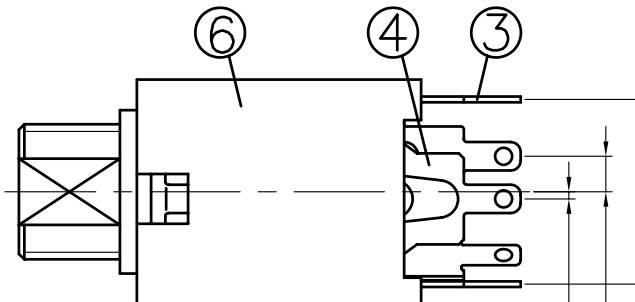




**NUT**



**WASHER**

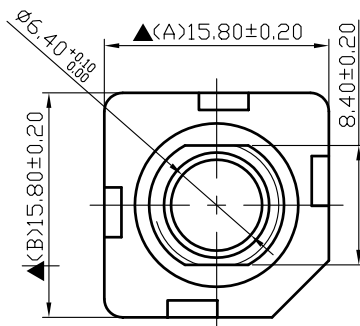

**Ø3/8\"/>**

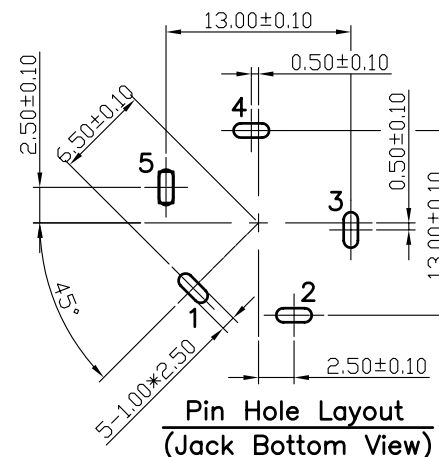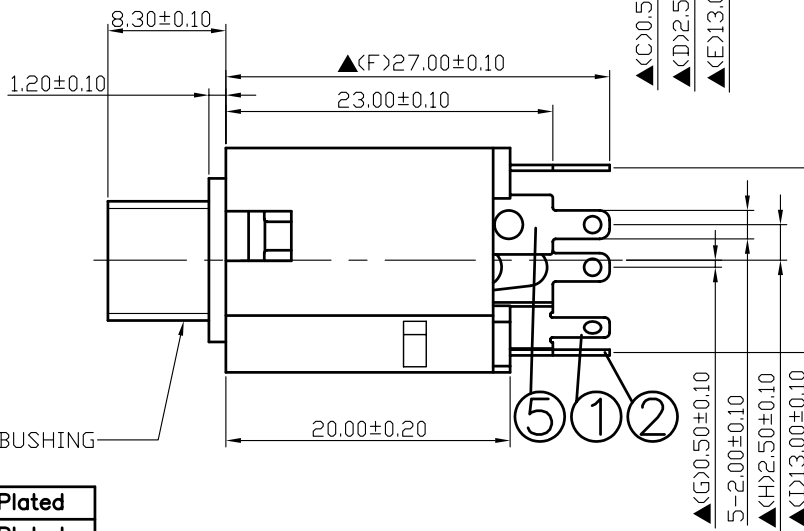

| 8.  | Washer         | 0.4T Brass           | 1     | Nickel Plated |
|-----|----------------|----------------------|-------|---------------|
| 7.  | Nut            | 2.2T Brass           | 1     | Nickel Plated |
| 6.  | Housing        | PBT                  | 1     | Black Color   |
| 5.  | Ring Shunt     | 0.4T Brass           | 1     | Silver Plated |
| 4.  | Ring Spring    | 0.4T Phosphor Bronze | 1     | Silver Plated |
| 3.  | Tip Spring     | 0.4T Phosphor Bronze | 1     | Silver Plated |
| 2.  | Tip Shunt      | 0.4T Brass           | 1     | Silver Plated |
| 1.  | Earth Terminal | 0.4T Brass           | 1     | Silver Plated |
| NO. | Description    | Material             | Q 'TY | Finish        |



**S.C. PRECISION INDUSTRIAL CO., LTD.**

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 10.12.2011 |     |      |      |         |

**PART NAME :** 6.3Ø PHONE JACK **PART NUMBER:** SCJ649P20US4B00G

**VERSION:** 3.0

**TOLERANCE :** ±0.3mm UNLESS OTHERWISE SPECIFIED

**UNIT:** mm



**SCALE:** 1/1

**RoHS  
Compliant**

**For Reference  
僅供參考**

**SPECIFICATIONS:**  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲: The Most Important Dimension