

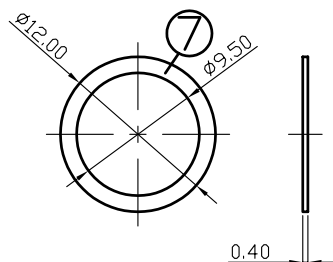



SCHMATIC	
MODEL NO	V

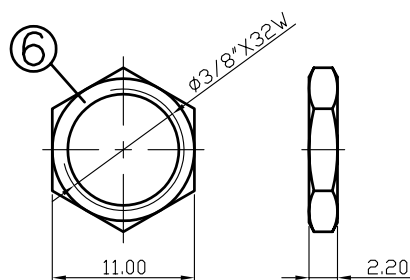



WASHER

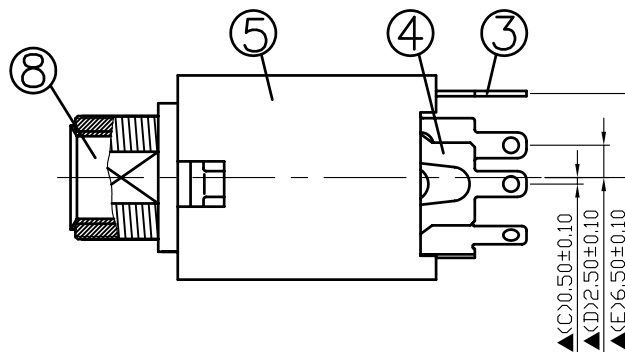

NUT

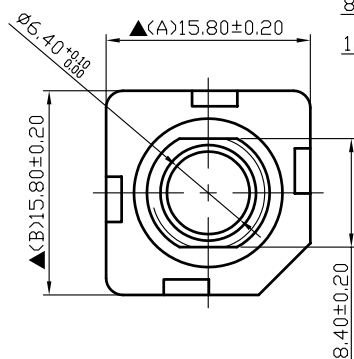

ø3/8"X32W PLASTIC BUSHING

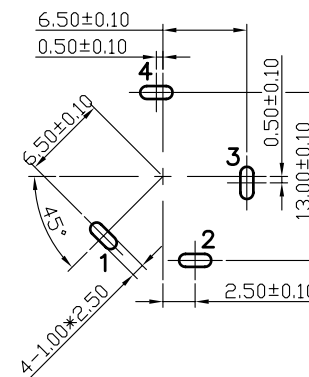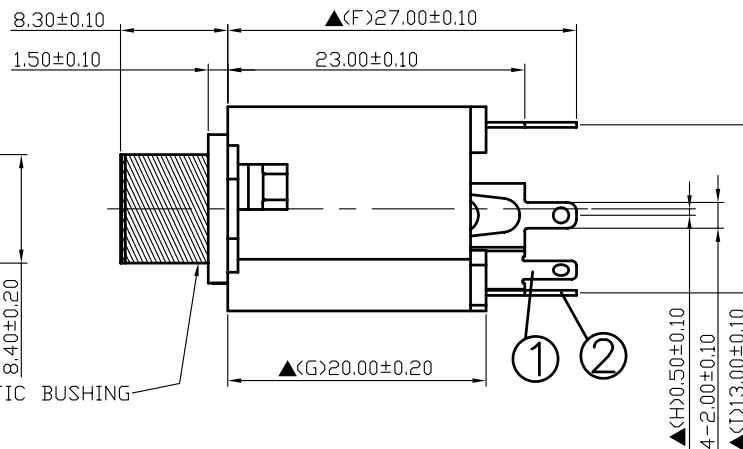

Pin Hole Layout
(Jack Bottom View)

8.	Bushing	Brass	1	Nickel Plated
7.	Washer	0.4T Brass	1	Nickel Plated
6.	Nut	2.2T Brass	1	Nickel Plated
5.	Housing	PBT	1	Black Color
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Tip Shunt	0.4T Brass	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.


DATE	DWN	CHKD	APVD	MANAGER
10.12.2011				

PART NAME : 6.3ø PHONE JACK PART NUMBER: SCJ649R6NVS4B00G

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考