

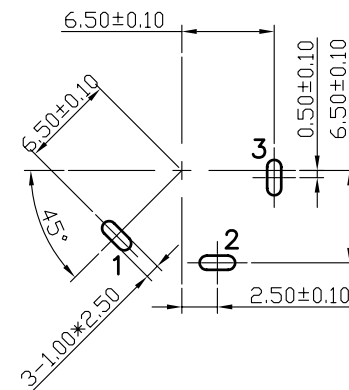
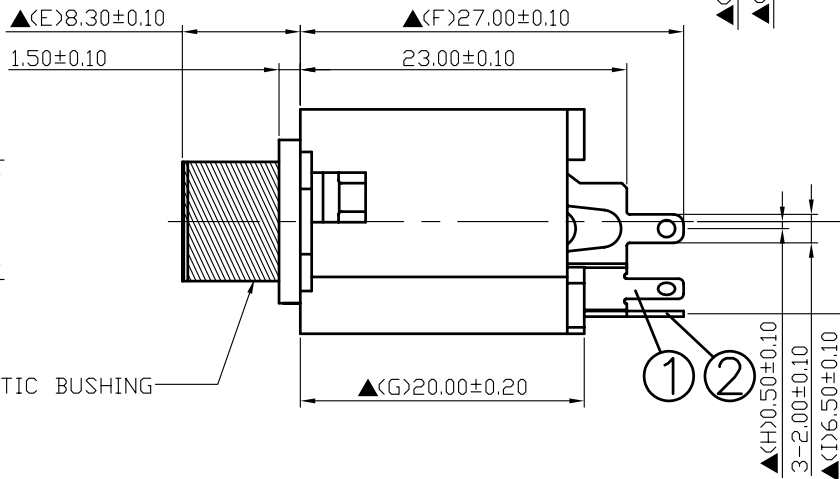
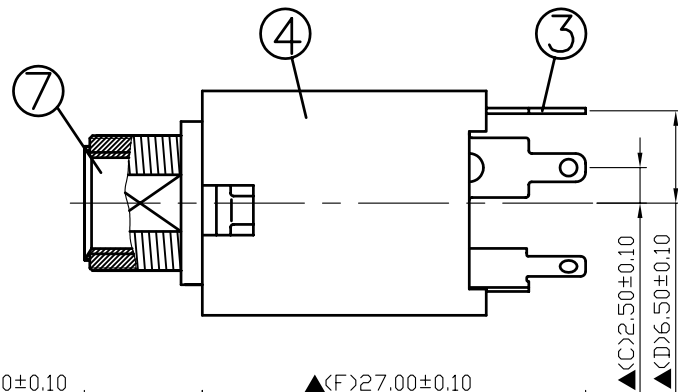
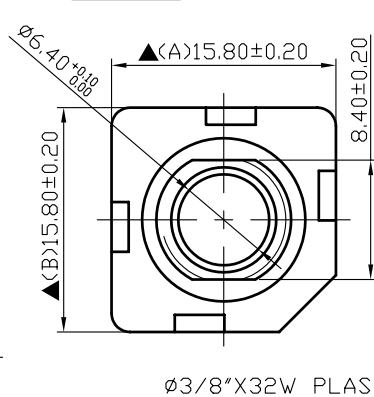
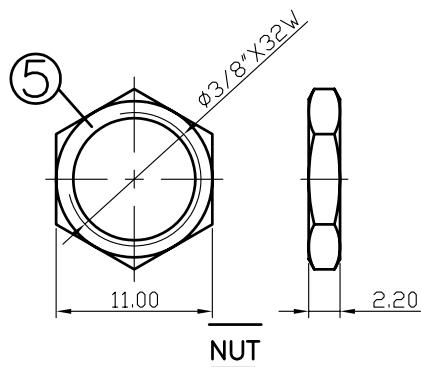


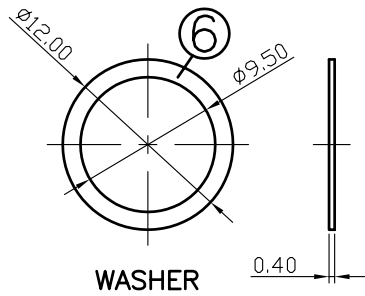

Pin Hole Layout
(Jack Bottom View)

7.	Bushing	Brass	1	Nickel Plated
6.	Washer	0.4T Brass	1	Nickel Plated
5.	Nut	2.2T Brass	1	Nickel Plated
4.	Housing	PBT	1	Black Color
3.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Tip Shunt	0.4T Brass	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.12.2011				


PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ649R6NYS4B00G

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考