


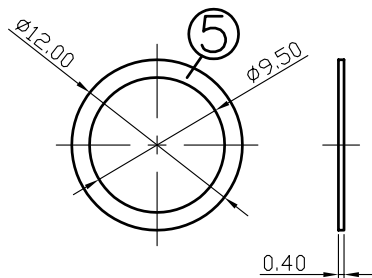



SCHEMATIC	
MODEL NO	Z

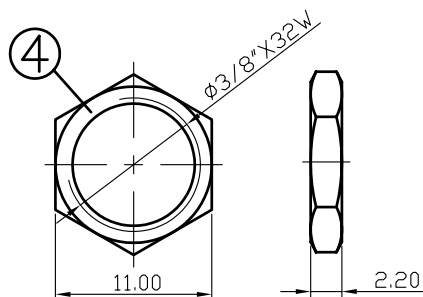



Washer

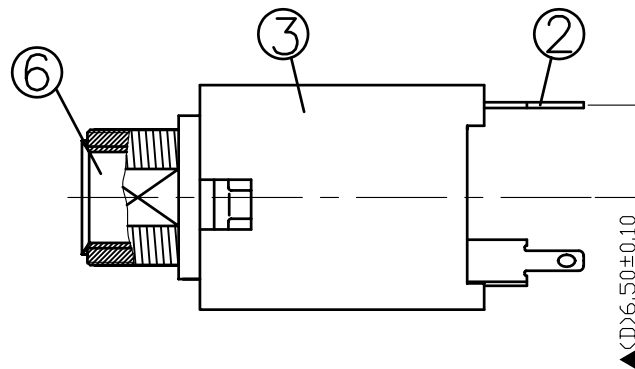

Nut

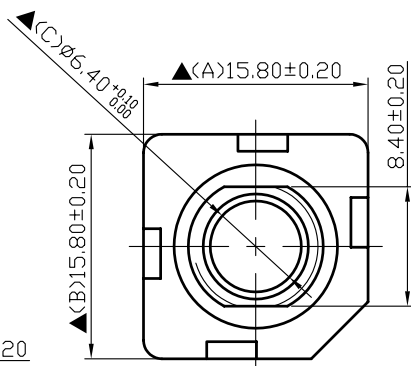

$\phi 3/8'' \times 32W$ PLASTIC BUSHING

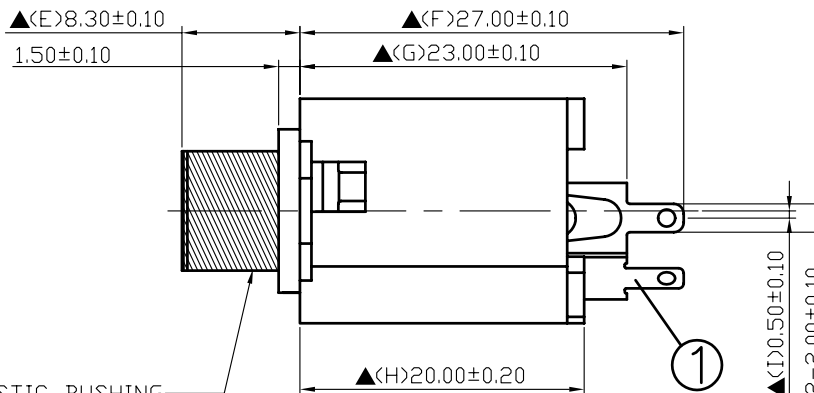

Pin Hole Layout
(Jack Bottom View)

6.	Bushing	Brass	1	Nickel Plated
5.	Washer	0.4T Brass	1	Nickel Plated
4.	Nut	2.2T Brass	1	Nickel Plated
3.	Housing	PBT	1	Black Color
2.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

	DATE		DWN	CHKD	APVD	MANAGER
	10.12.2011					

PART NAME :6.3 ϕ PHONE JACK	PART NUMBER:SCJ649R6NZS4B00G	VERSION:2.0
TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED	UNIT:mm 	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考