
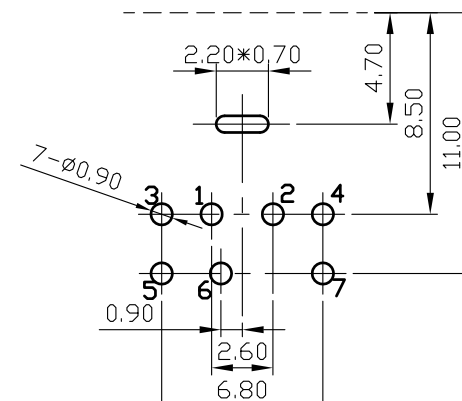
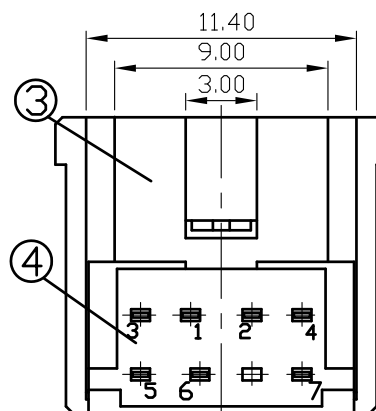
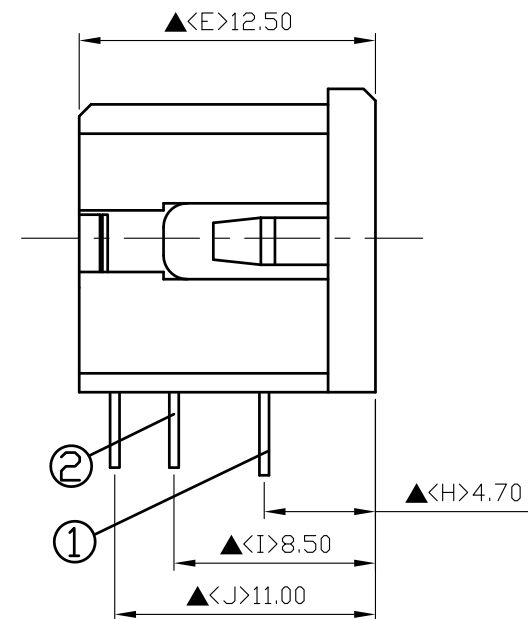
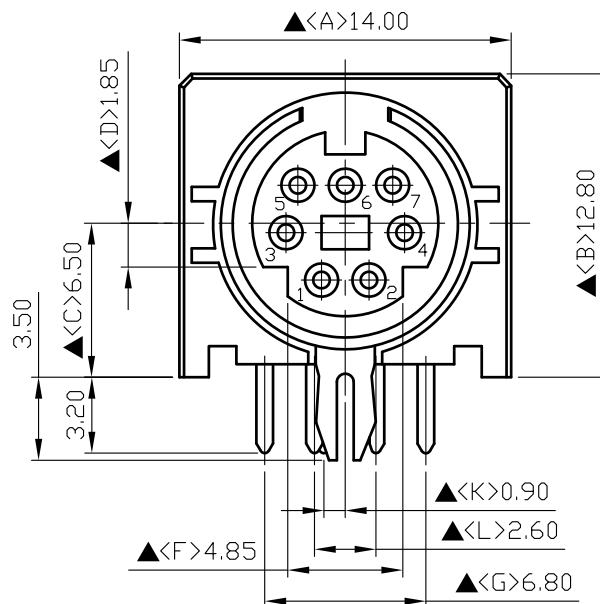




Pin Hole Layout  
(Jack Bottom View)

|     |              |                      |      |                                                         |
|-----|--------------|----------------------|------|---------------------------------------------------------|
| 4.  | Cover        | PBT+30%              | 1    | Black Color                                             |
| 3.  | Housing      | PBT+30%              | 1    | Black Color                                             |
| 2.  | Terminal     | 0.2T phosphor Bronze | 7    | Gold Flash Plated Contact<br>& Terminal Plated With Tin |
| 1.  | Inner Shield | 0.35T Brass          | 1    | Nickel Plating                                          |
| NO. | Description  | Material             | Q'TY | Finish                                                  |

③

④



S.C. PRECISION INDUSTRIAL CO., LTD.

|            |     |      |      |         |
|------------|-----|------|------|---------|
| DATE       | DWN | CHKD | APVD | MANAGER |
| 12.28.2021 | 王平華 |      |      |         |

PART NAME : DIN JACK

PART NUMBER : SCN551S7GTNB000G

VERSION:5.0

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:  
Contact Resistance :30mΩ max  
Insulation Resistance :100MΩ min.at DC 500V  
Dielectric Withstand Voltage:AC 500V for one minute  
Remark:▲:The Most Important Dimension

For Redference  
僅供參考

RoHS&SVHC  
Compliant