

A






B

C

D

E

SCHEMATIC

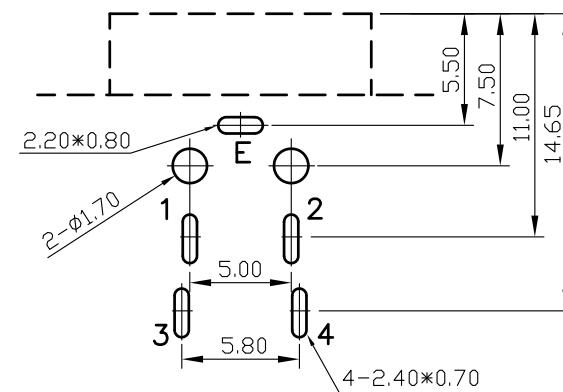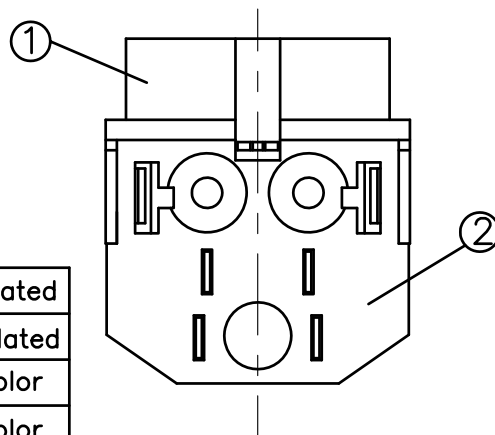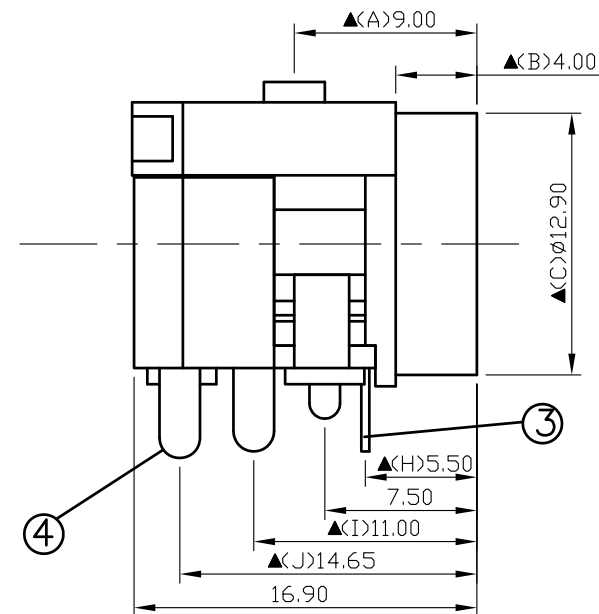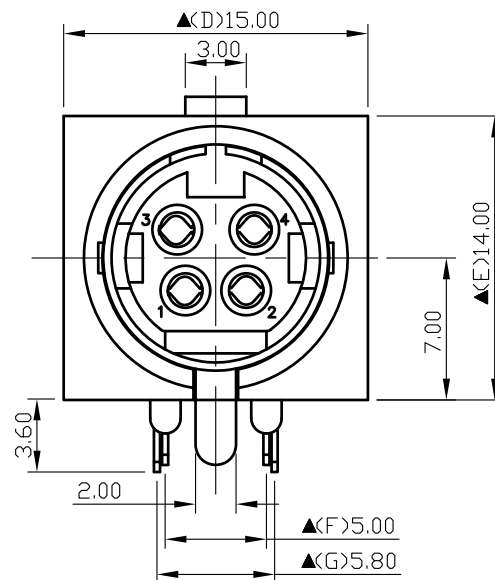

Pin Hole Layout
<Jack Bottom View>

4.	Terminal	0.3T Brass	4	Silver Plated
3.	Inner shield	0.4T Brass	1	Nickel Plated
2.	Cover	PBT+30%	1	Black Color
1.	Housing	PBT+15%	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
08.13.2021	王平華			

PART NAME : DIN JACK

PART NUMBER: SCN771S4NS0B001G

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:

SPECIFICATIONS:

Current Rating : Max 5.0A , 24V DC
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 24V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Compliant