
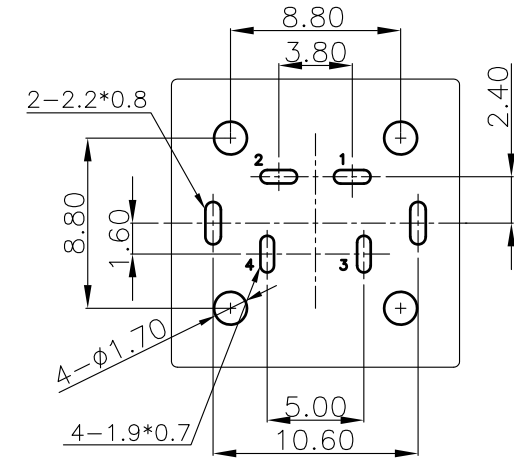
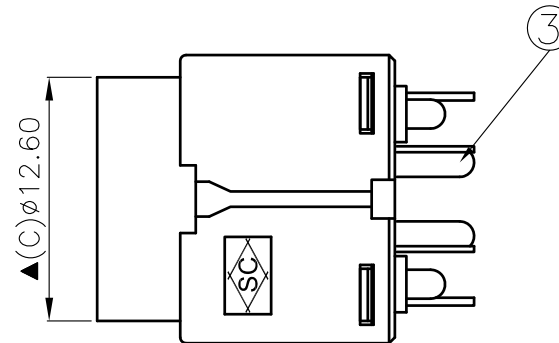
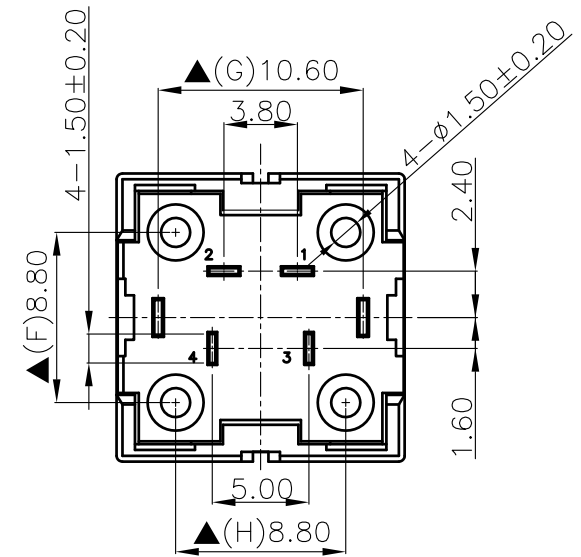
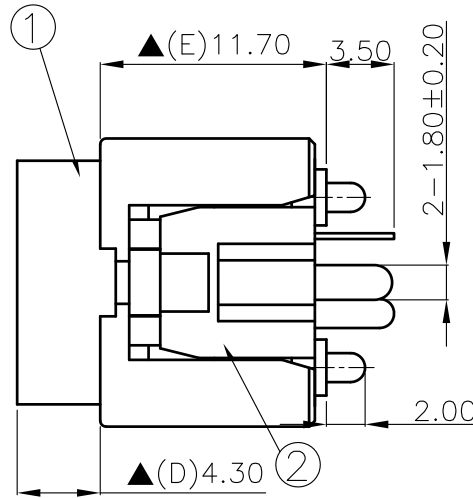
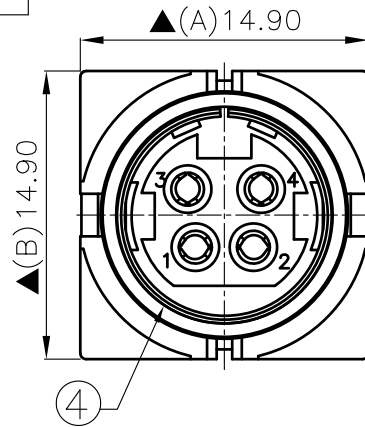


SCHEMATIC

Pin Hole Layout
(Jack Bottom View)For Redference
僅供參考RoHS&SVHC
Compliant

4.	Inner Shield	0.4T Brass	1	Nickel Plated
3.	Contact Terminal	0.3T Phosphor Bronze	4	Silver Plated
2.	Cover	PBT+30%	1	Black Color
1.	Housing	PBT+15%	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.06.2021	王平華			

PART NAME : DIN JACK

PART NUMBER:SCN781S4NS0B001G

VERSION:8.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Rating: 100VAC 1A(max.)/20VDC 7.5A(max.) 4H
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension