

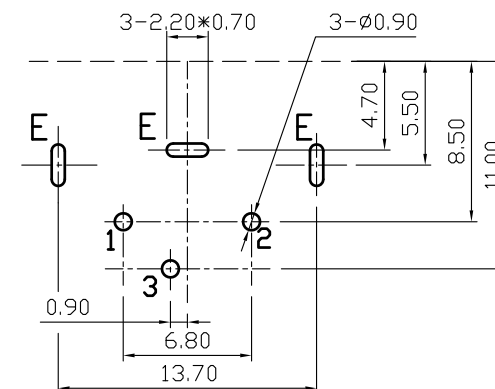
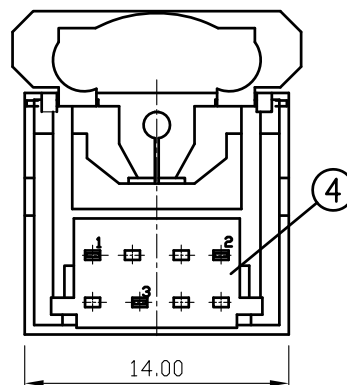
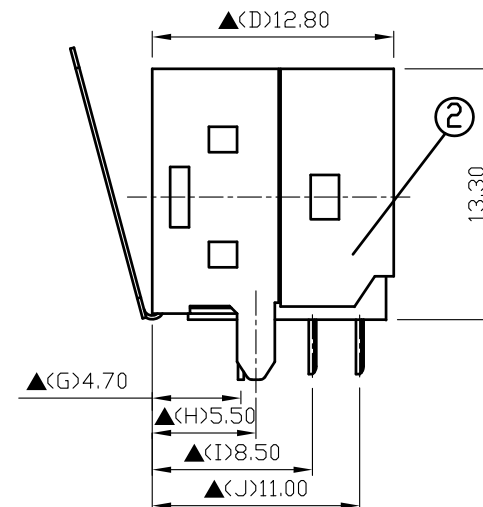


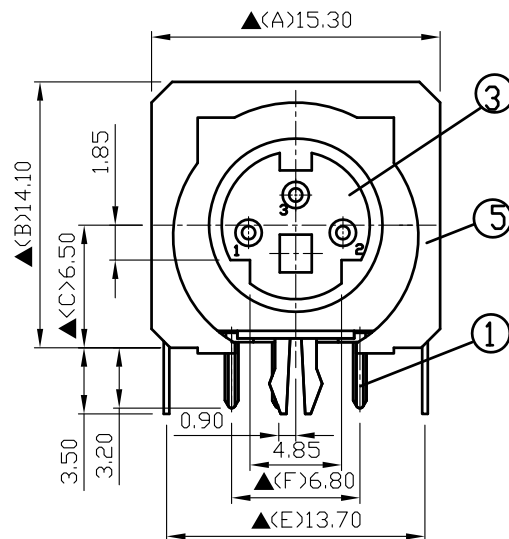

Pin Hole Layout
(Jack Bottom View)

5.	Panel Ground	0.20T SUS301	1	
4.	Cover	PBT+30%	1	Black Color
3.	Housing	PBT+30%	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Copper	3	Gold Flash Plated Contact & Terminal Plated With Tin
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.19.2022	王平華			

PART NAME : MINI DIN JACK

PART NUMBER:SCN553S3GTNB020G

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant