
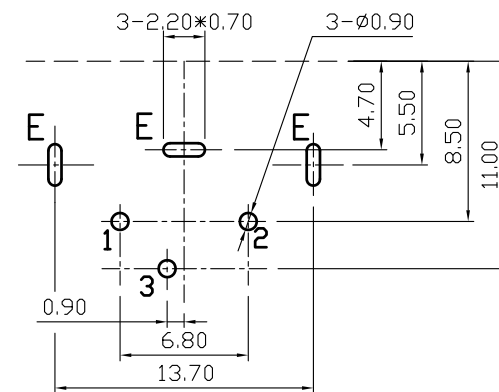

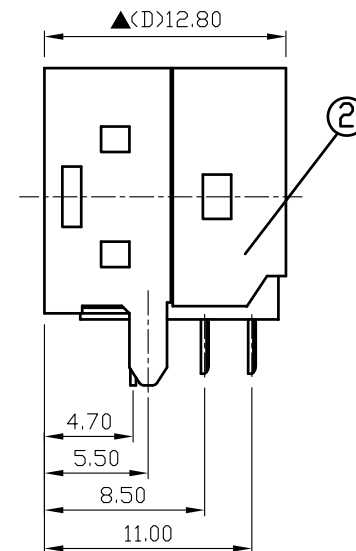
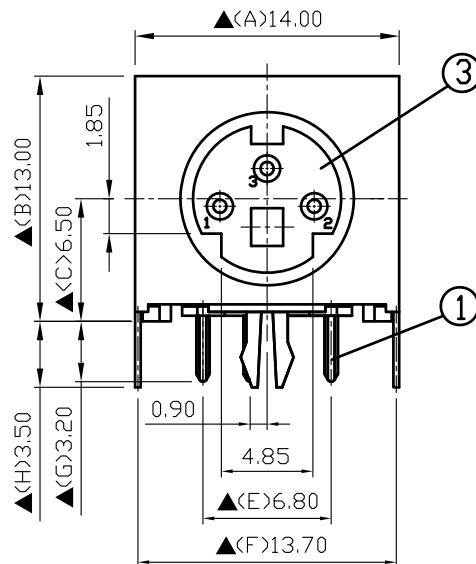




Pin Hole Layout
(Jack Bottom View)

4.	Cover	PBT+30%	1	Black Color
3.	Housing	PBT+30%	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Copper	3	Gold Flash Plated Contact &Terminal Plated With Tin
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
01.19.2022	王平華			

SCALE:1/1

UNIT:mm



SCALE:1/1

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant