


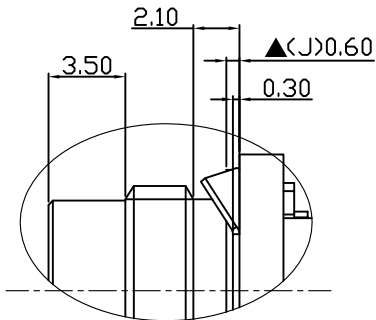

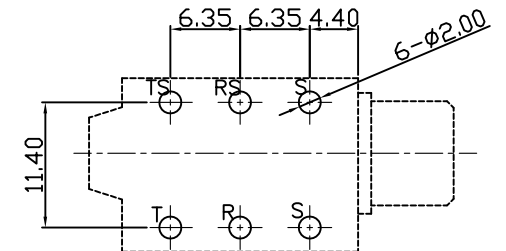
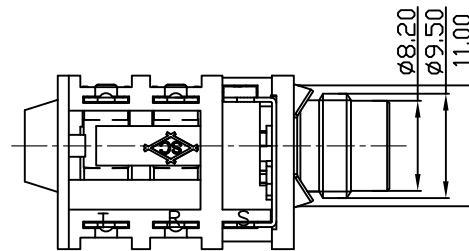
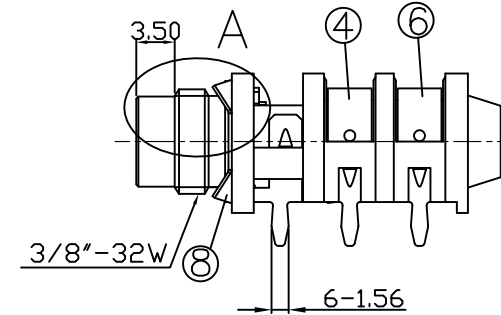


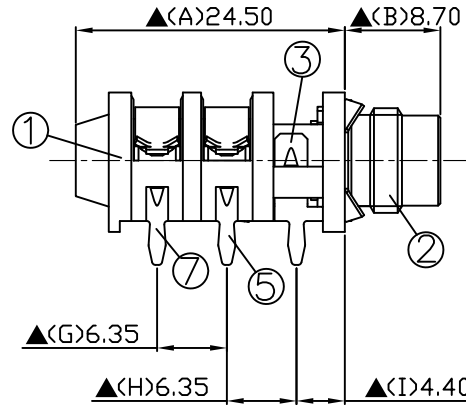

"A"Detail

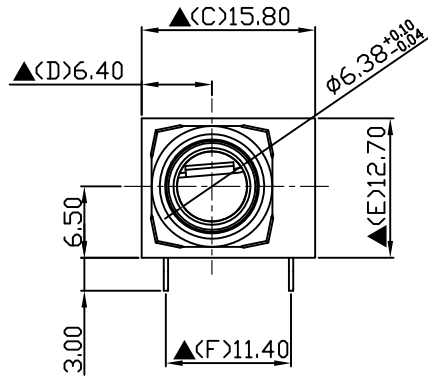

Pin Hole Layout
(Jack Bottom View)

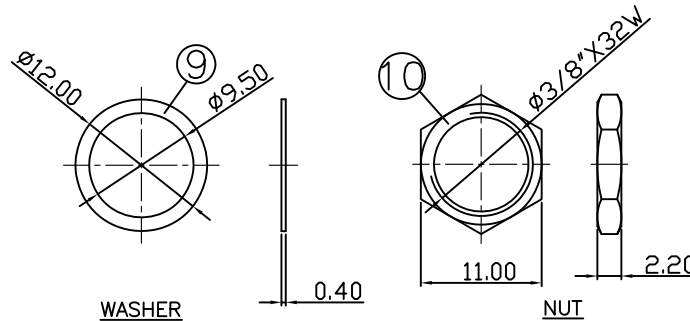

WASHER

NUT

10.	Nut	Low Lead Brass Rod	1	Nickel Plated
9.	Washer	0.4T Brass	1	Nickel Plated
8.	Earth Spring	0.3T Steel	1	Nickel Plated
7.	Tip Shunt	0.4T Brass	1	Silver Plated
6.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
5.	Ring Shunt	0.4T Brass	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Brass	1	Silver Plated
2.	Barrel	Low Lead Brass Rod	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.26.2023	王平華			

For Redference
僅供參考

RoHS&SVHC
Pb Free Process

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ635M6NFS4BP0L

VERSION: 4.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: /

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension