

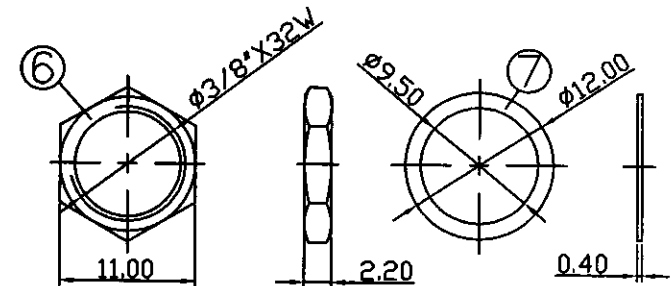


|           |           |
|-----------|-----------|
| SCHEMATIC | 1S<br>3T  |
|           | 5RS<br>4R |
| MODEL NO  | W         |

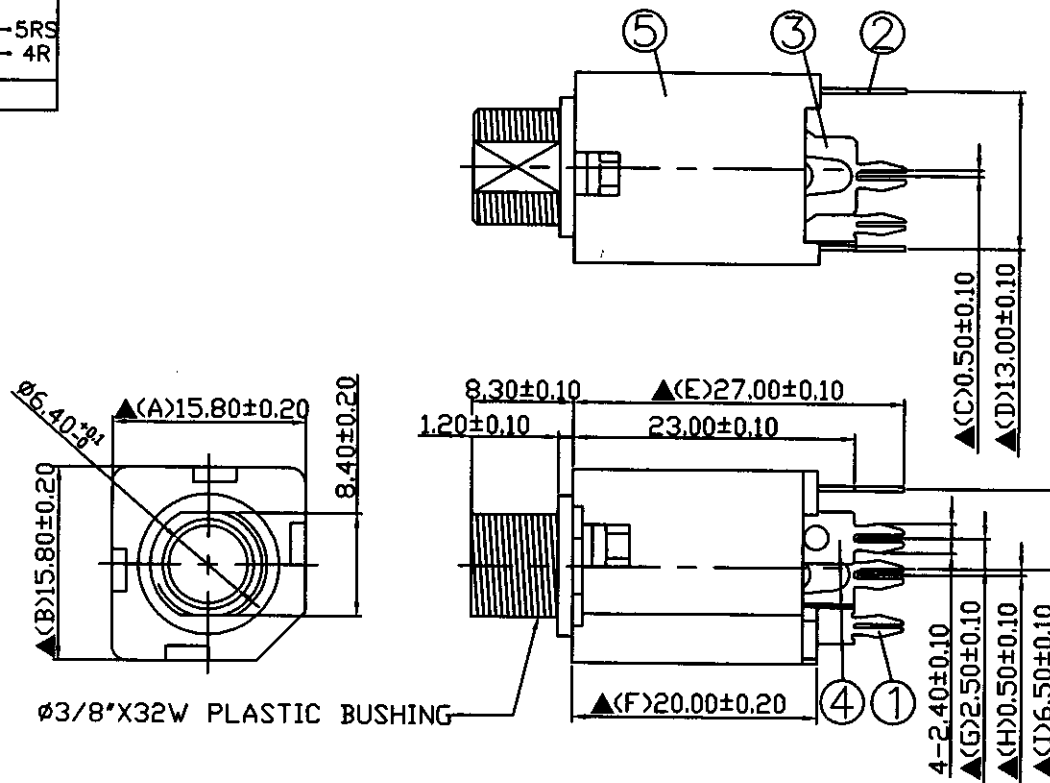

Nut

Washer

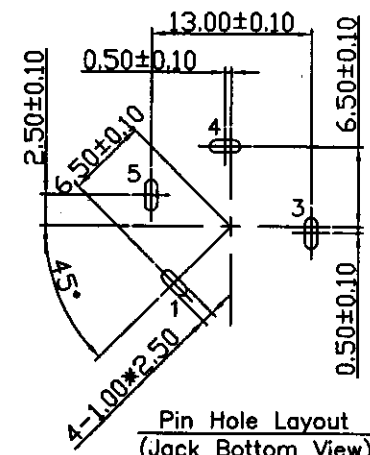

Pin Hole Layout  
(Jack Bottom View)

|     |                |                      |      |               |
|-----|----------------|----------------------|------|---------------|
| 7.  | Washer         | 0.4T Brass           | 1    | Nickel Plated |
| 6.  | Nut            | 2.2T Brass           | 1    | Nickel Plated |
| 5.  | Housing        | PBT                  | 1    | Black Color   |
| 4.  | Ring Shunt     | 0.4T Brass           | 1    | Silver Plated |
| 3.  | Ring Spring    | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 2.  | Tip Spring     | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Earth Terminal | 0.4T Brass           | 1    | Silver Plated |
| NO. | Description    | Material             | Q'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 12.08.2005 | 鄧華香 | 鄧華香  | 鄧華香  | 鄧華香     |

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ651P20WS4B00G

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲: The Most Important Dimension

