


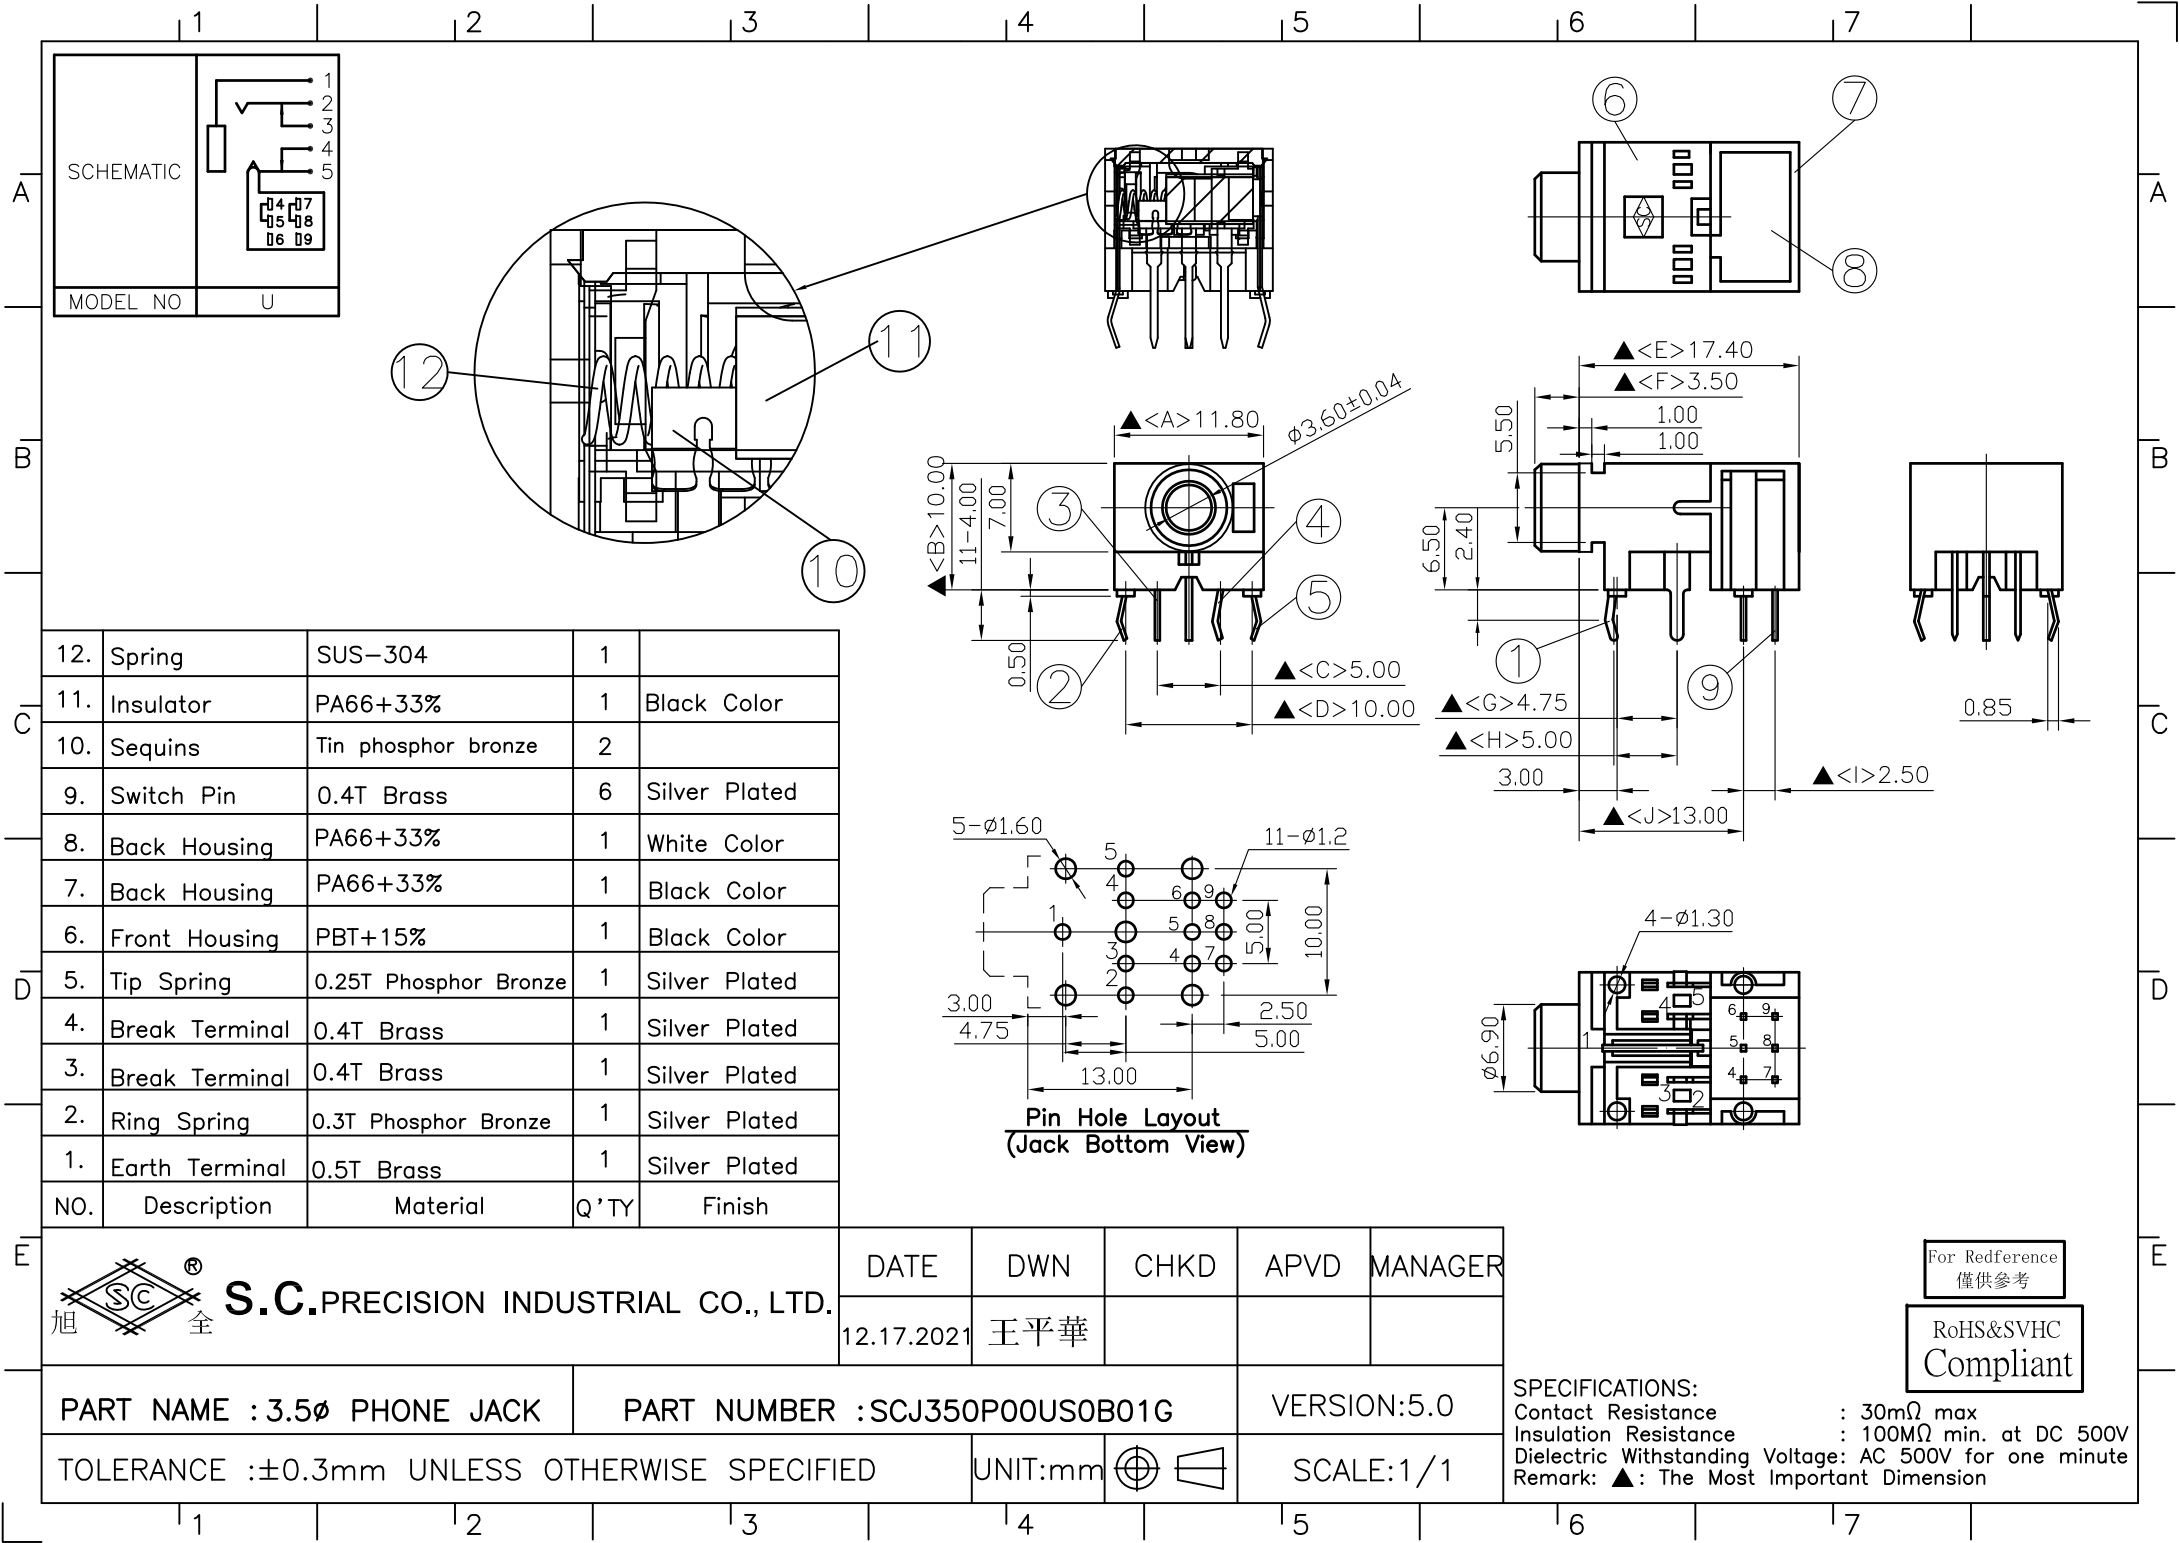

12.	Spring	SUS-304	1	
11.	Insulator	PA66+33%	1	Black Color
10.	Sequins	Tin phosphor bronze	2	
9.	Switch Pin	0.4T Brass	6	Silver Plated
8.	Back Housing	PA66+33%	1	White Color
7.	Back Housing	PA66+33%	1	Black Color
6.	Front Housing	PBT+15%	1	Black Color
5.	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.5T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	12.17.2021	王平華			

PART NAME : 3.5 ϕ PHONE JACK	PART NUMBER : SCJ350P00US0B01G	VERSION: 5.0
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT: mm 	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant