

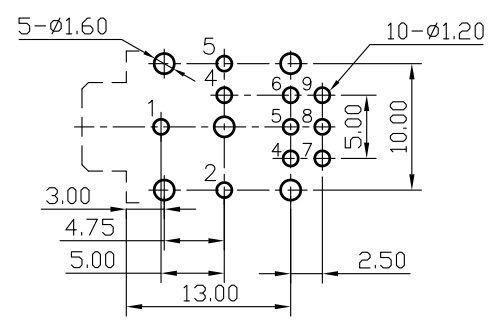

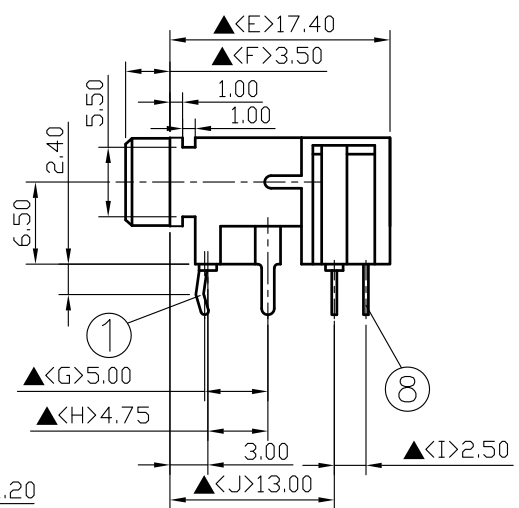
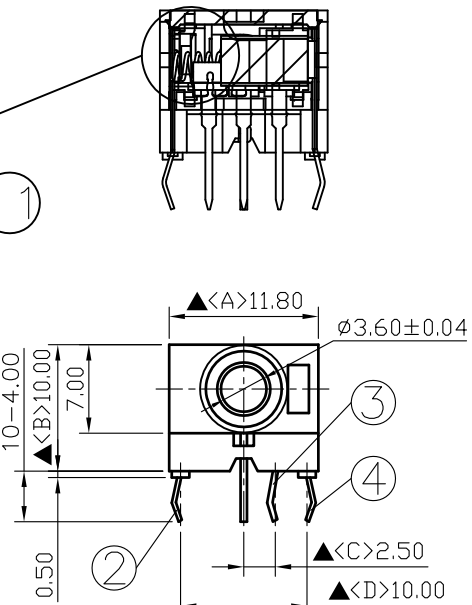
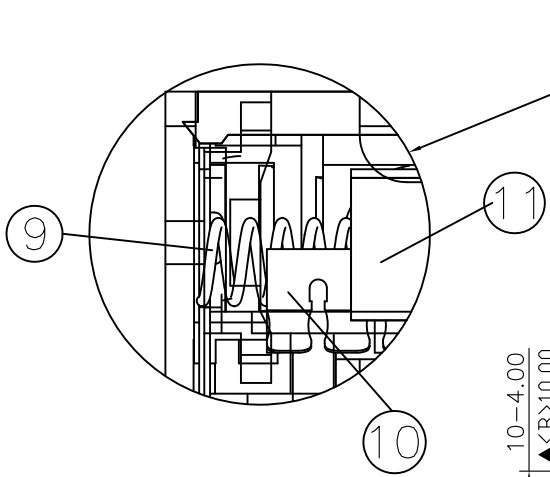



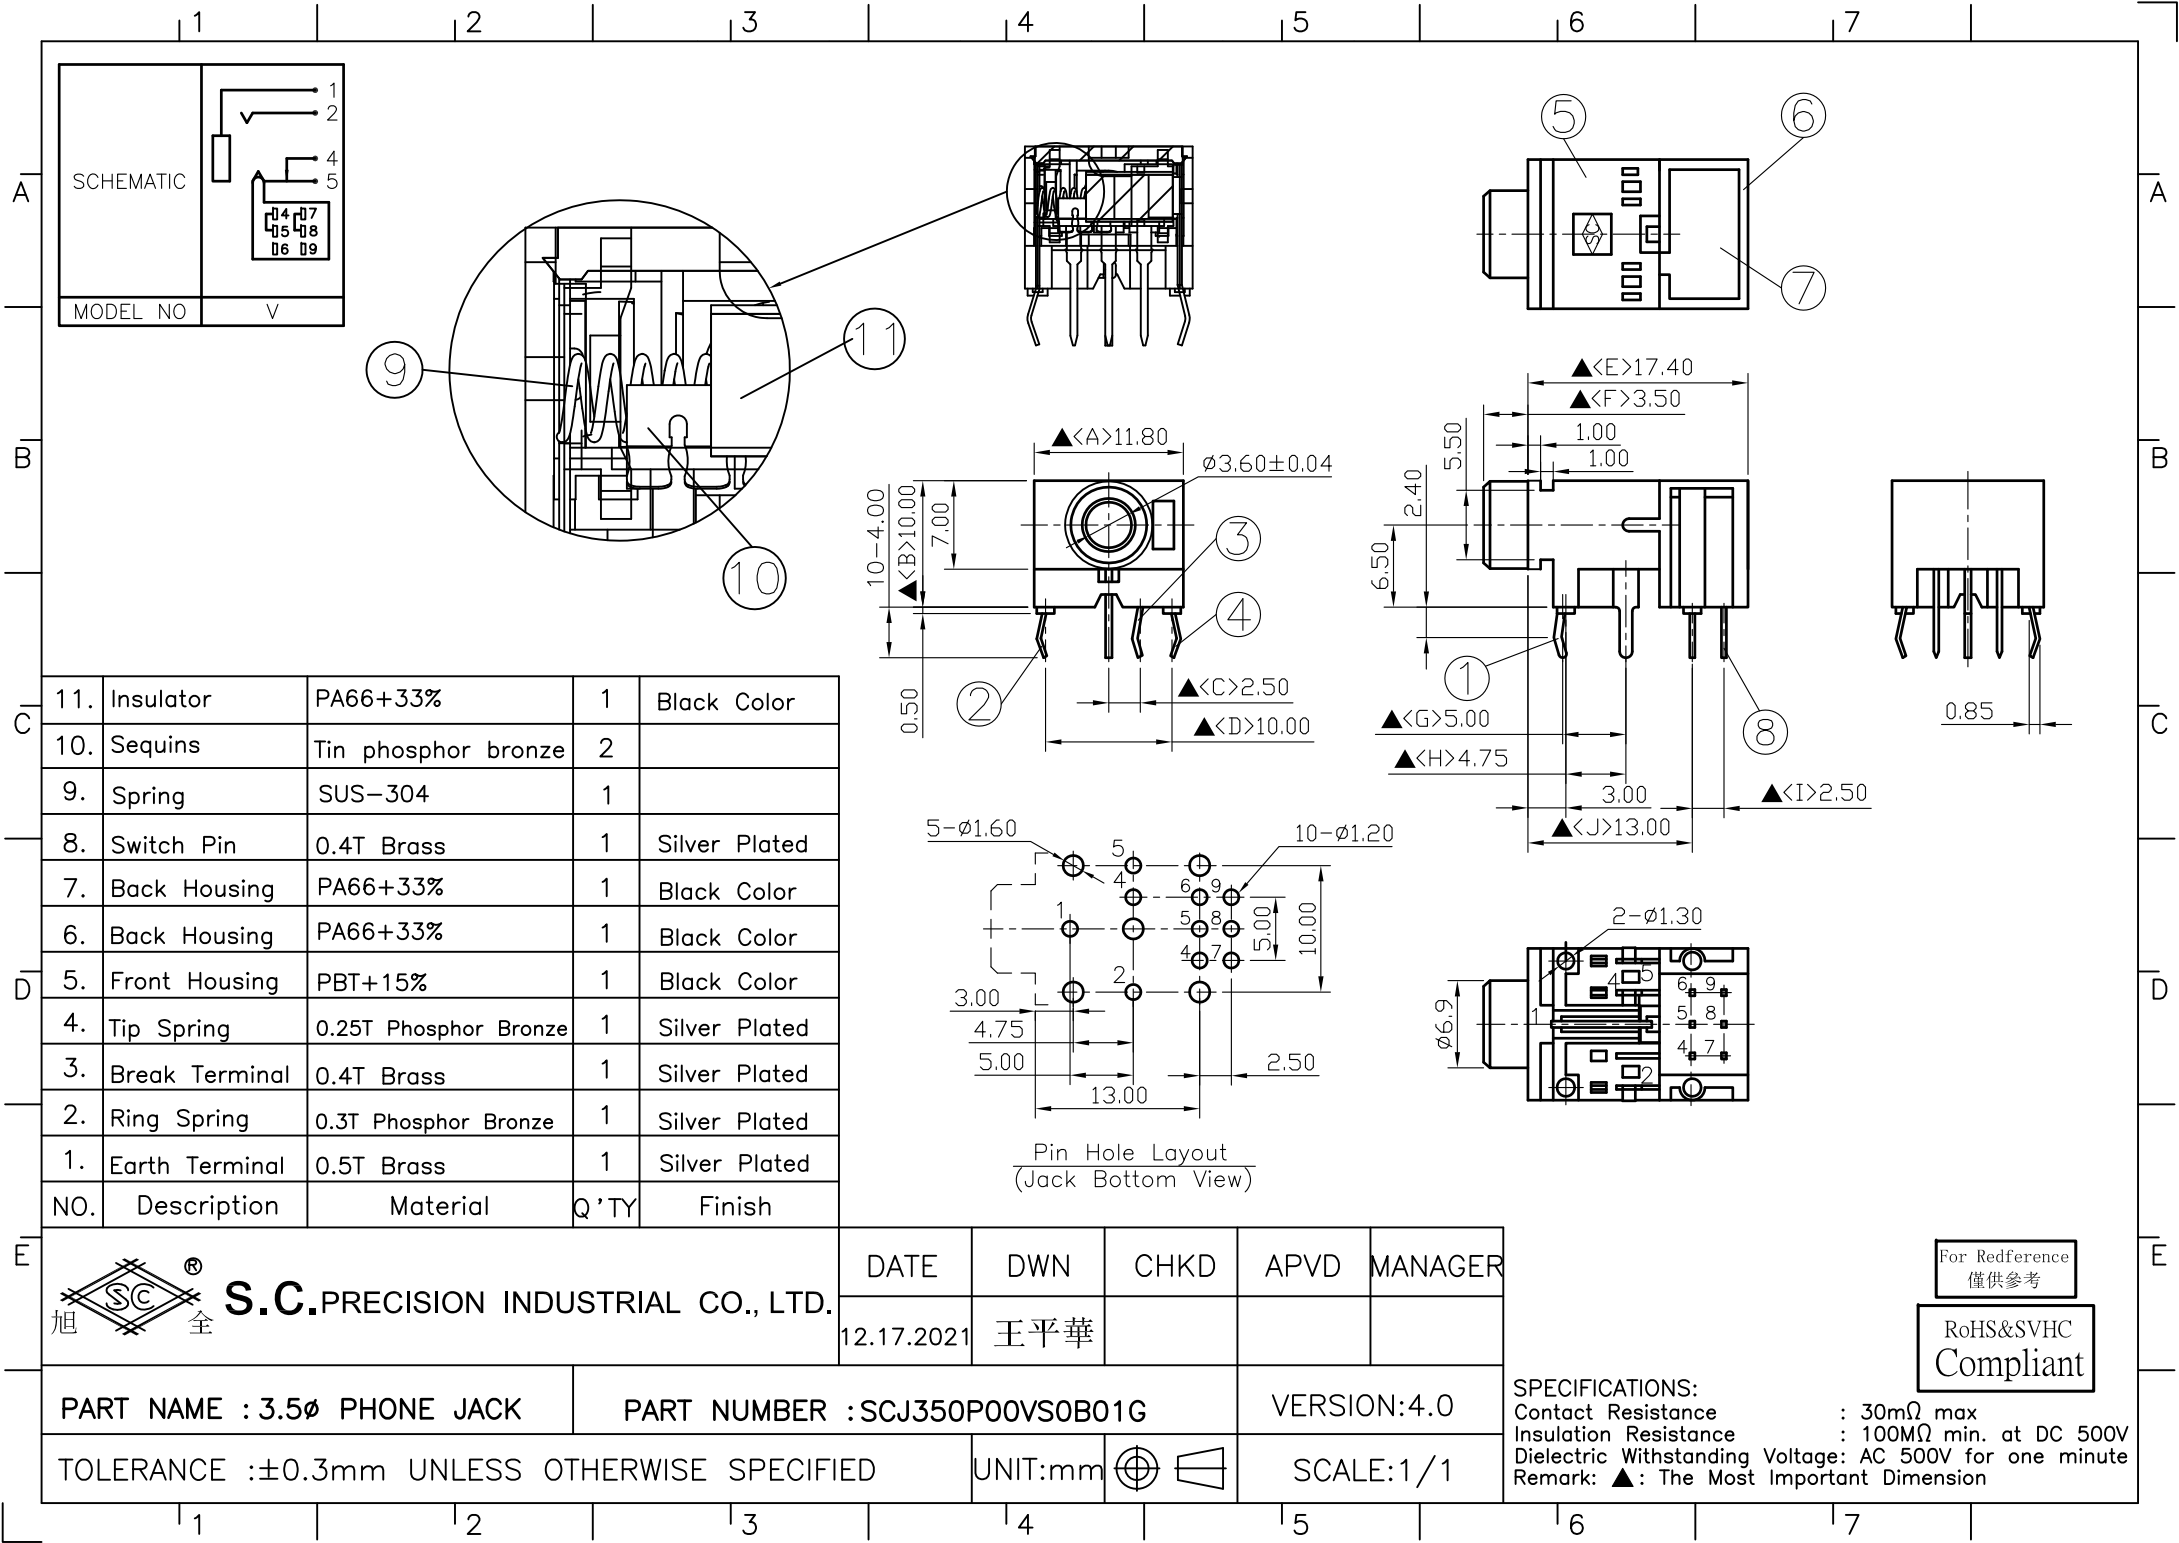

Pin Hole Layout
(Jack Bottom View)



11.	Insulator	PA66+33%	1	Black Color
10.	Sequins	Tin phosphor bronze	2	
9.	Spring	SUS-304	1	
8.	Switch Pin	0.4T Brass	1	Silver Plated
7.	Back Housing	PA66+33%	1	Black Color
6.	Back Housing	PA66+33%	1	Black Color
5.	Front Housing	PBT+15%	1	Black Color
4.	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.5T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	12.17.2021	王平華			

PART NAME : 3.5Ø PHONE JACK	PART NUMBER : SCJ350P00VS0B01G	VERSION:4.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant