



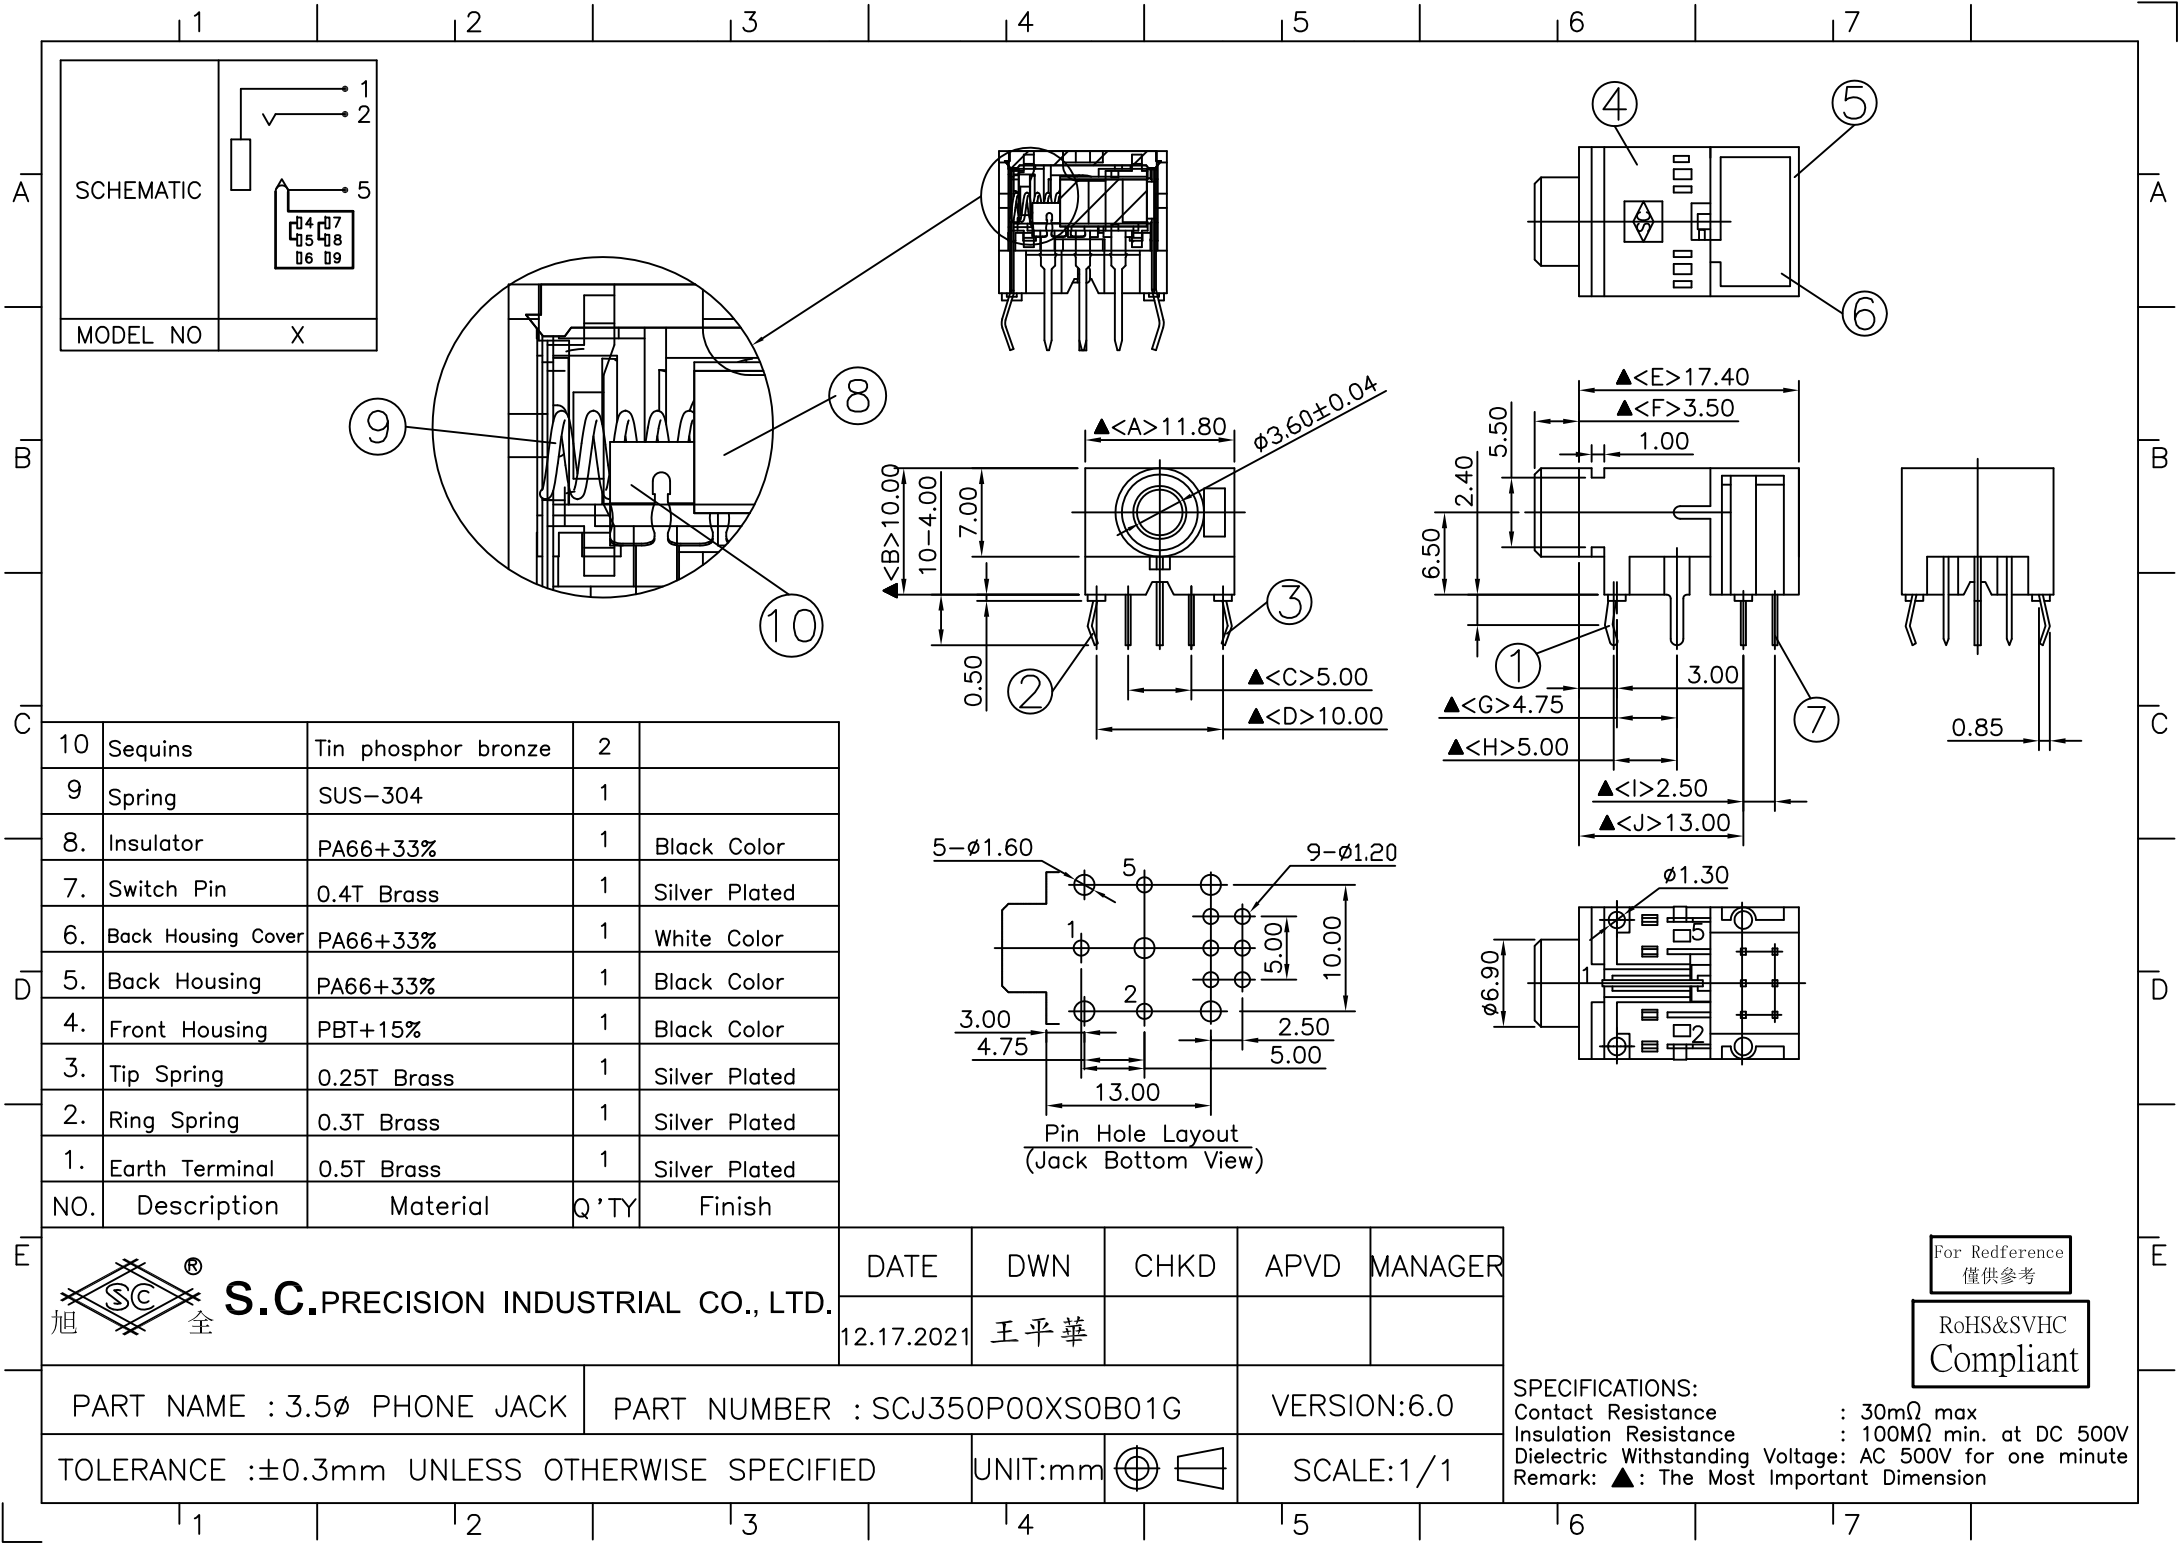





SCHEMATIC

MODEL NO



04 07
05 08
06 09


X

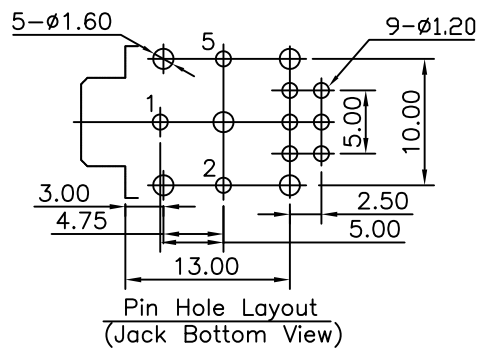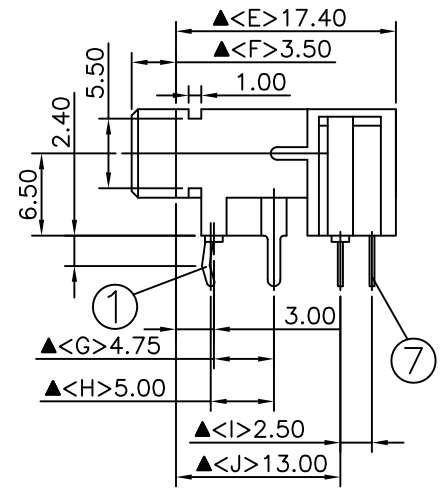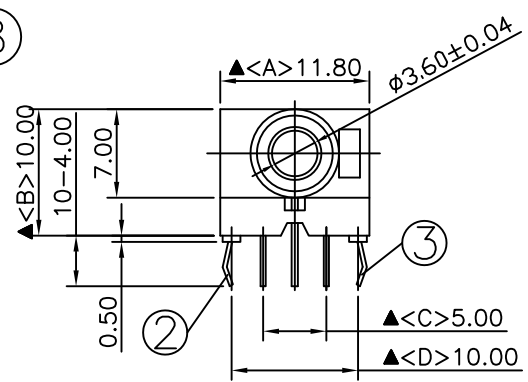

10	Sequins	Tin phosphor bronze	2	
9	Spring	SUS-304	1	
8.	Insulator	PA66+33%	1	Black Color
7.	Switch Pin	0.4T Brass	1	Silver Plated
6.	Back Housing Cover	PA66+33%	1	White Color
5.	Back Housing	PA66+33%	1	Black Color
4.	Front Housing	PBT+15%	1	Black Color
3.	Tip Spring	0.25T Brass	1	Silver Plated
2.	Ring Spring	0.3T Brass	1	Silver Plated
1.	Earth Terminal	0.5T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 **S.C.PRECISION INDUSTRIAL CO., LTD.**

DATE	DWN	CHKD	APVD	MANAGER
12.17.2021	王平華			

PART NAME : 3.5 ϕ PHONE JACK	PART NUMBER : SCJ350P00XS0B01G	VERSION:6.0
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT:mm 	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考
RoHS&SVHC
Compliant