

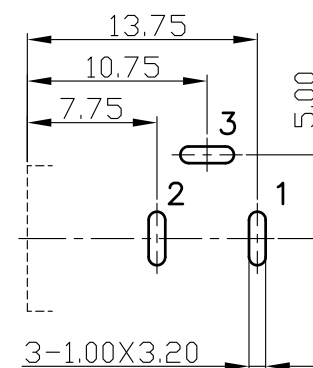
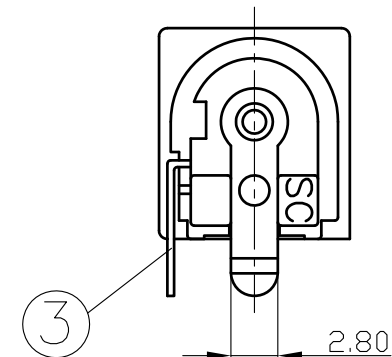
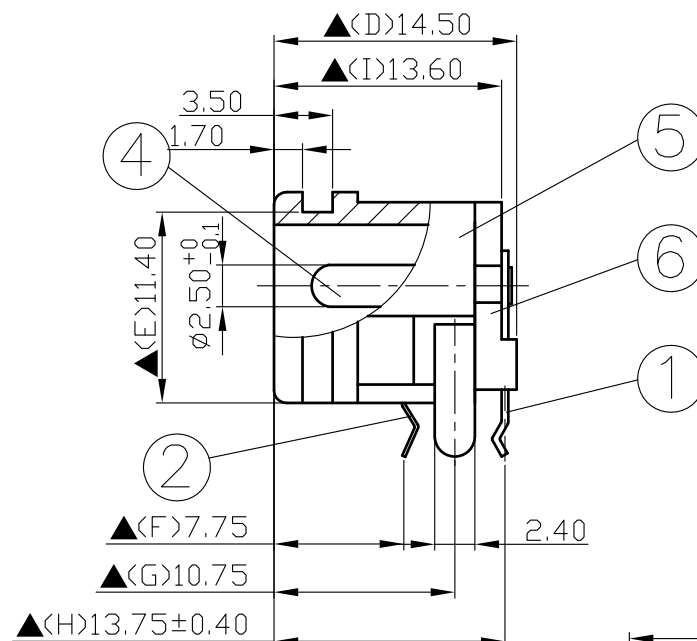


SCHEMATIC	
MODEL NO	C

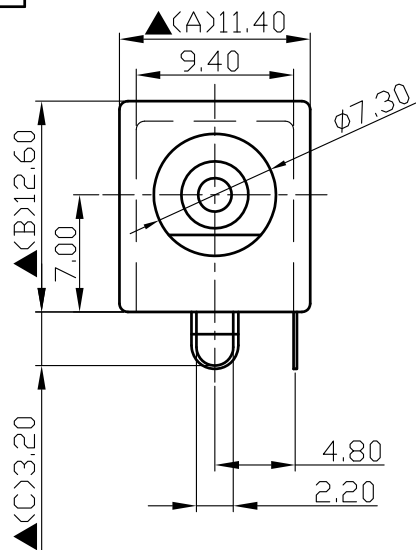

Pin Hole Layout
(Jack Bottom View)

For Redference
僅供參考

RoHS&SVHC
Compliant

6.	Cover	PBT+30%	1	Black Color
5.	Housing	PBT+15%	1	Black Color
4.	Pin(2.5 ϕ)	Brass	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Branze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.07.2021	王平華			

PART NAME :DC POWER JACK

PART NUMBER:SCD452DCS003B00G

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance	: 30m Ω max
Current Rating	: Max 5.0A , 24V DC
Insulation Resistance	: 100M Ω min. at DC 500V
Dielectric Withstanding Voltage	: AC 500V for one minute
Remark: ▲ : The Most Important Dimension	