

1 2 3 4 5 6 7

A


B

C

D




E

SCHEMATIC




MODEL NO

C

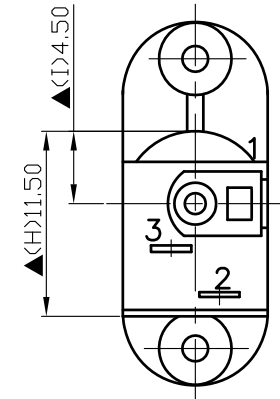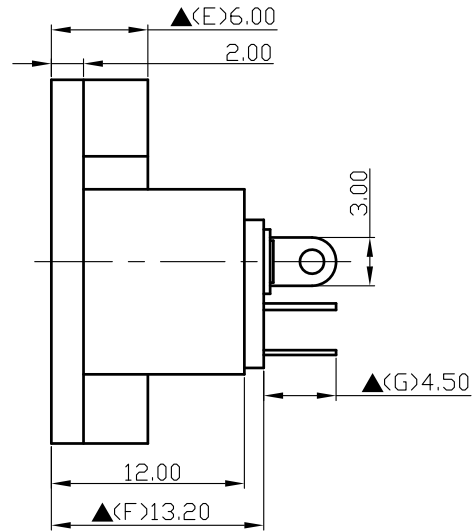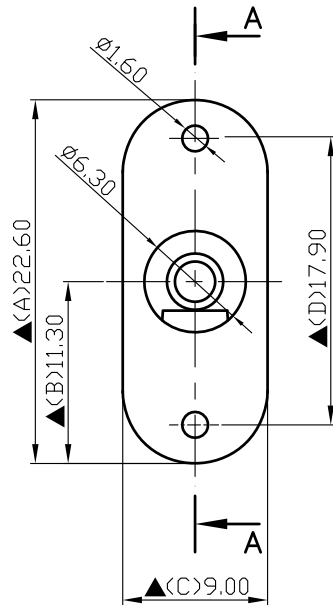

|     |                        |                      |      |               |
|-----|------------------------|----------------------|------|---------------|
| 6.  | Cover                  | 1.0T Bakelite        | 1    | Black Color   |
| 5.  | Housing                | PBT+15%              | 1    | Black Color   |
| 4.  | Pin(2.5φ)              | Brass                | 1    | Nikel Plated  |
| 3.  | Break Terminal         | 0.3T Brass           | 1    | Silver Plated |
| 2.  | Sleeve Spring Terminal | 0.2T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Pin Terminal           | 0.4T Brass           | 1    | Silver Plated |
| NO. | Description            | Material             | Q'TY | Finish        |

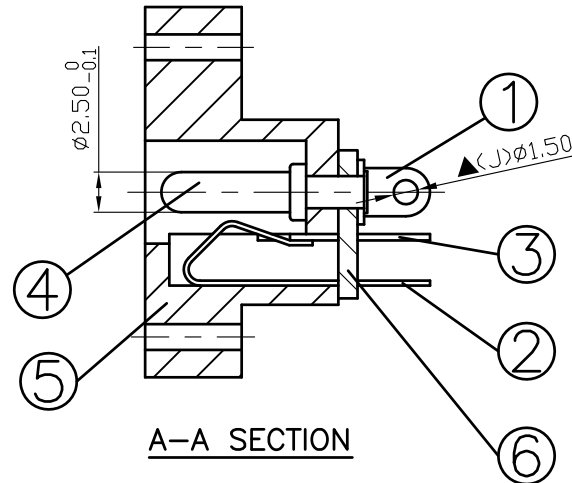

|                                                                                               |  |  |  |            |     |      |      |         |
|-----------------------------------------------------------------------------------------------|--|--|--|------------|-----|------|------|---------|
| <div><div><div>SC</div><div>旭全</div></div><div>S.C.PRECISION INDUSTRIAL CO., LTD.</div></div> |  |  |  | DATE       | DWN | CHKD | APVD | MANAGER |
|                                                                                               |  |  |  | 10.12.2021 | 王平華 |      |      |         |

|                           |                               |              |
|---------------------------|-------------------------------|--------------|
| PART NAME : DC POWER JACK | PART NUMBER: SCD519DCS000B00G | VERSION:11.0 |
|---------------------------|-------------------------------|--------------|

|                                              |         |           |
|----------------------------------------------|---------|-----------|
| TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm | SCALE:1/1 |
|----------------------------------------------|---------|-----------|

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Current Rating : Max 7.0A ,24VDC  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension

For Redference  
僅供參考

RoHS&SVHC  
Compliant