

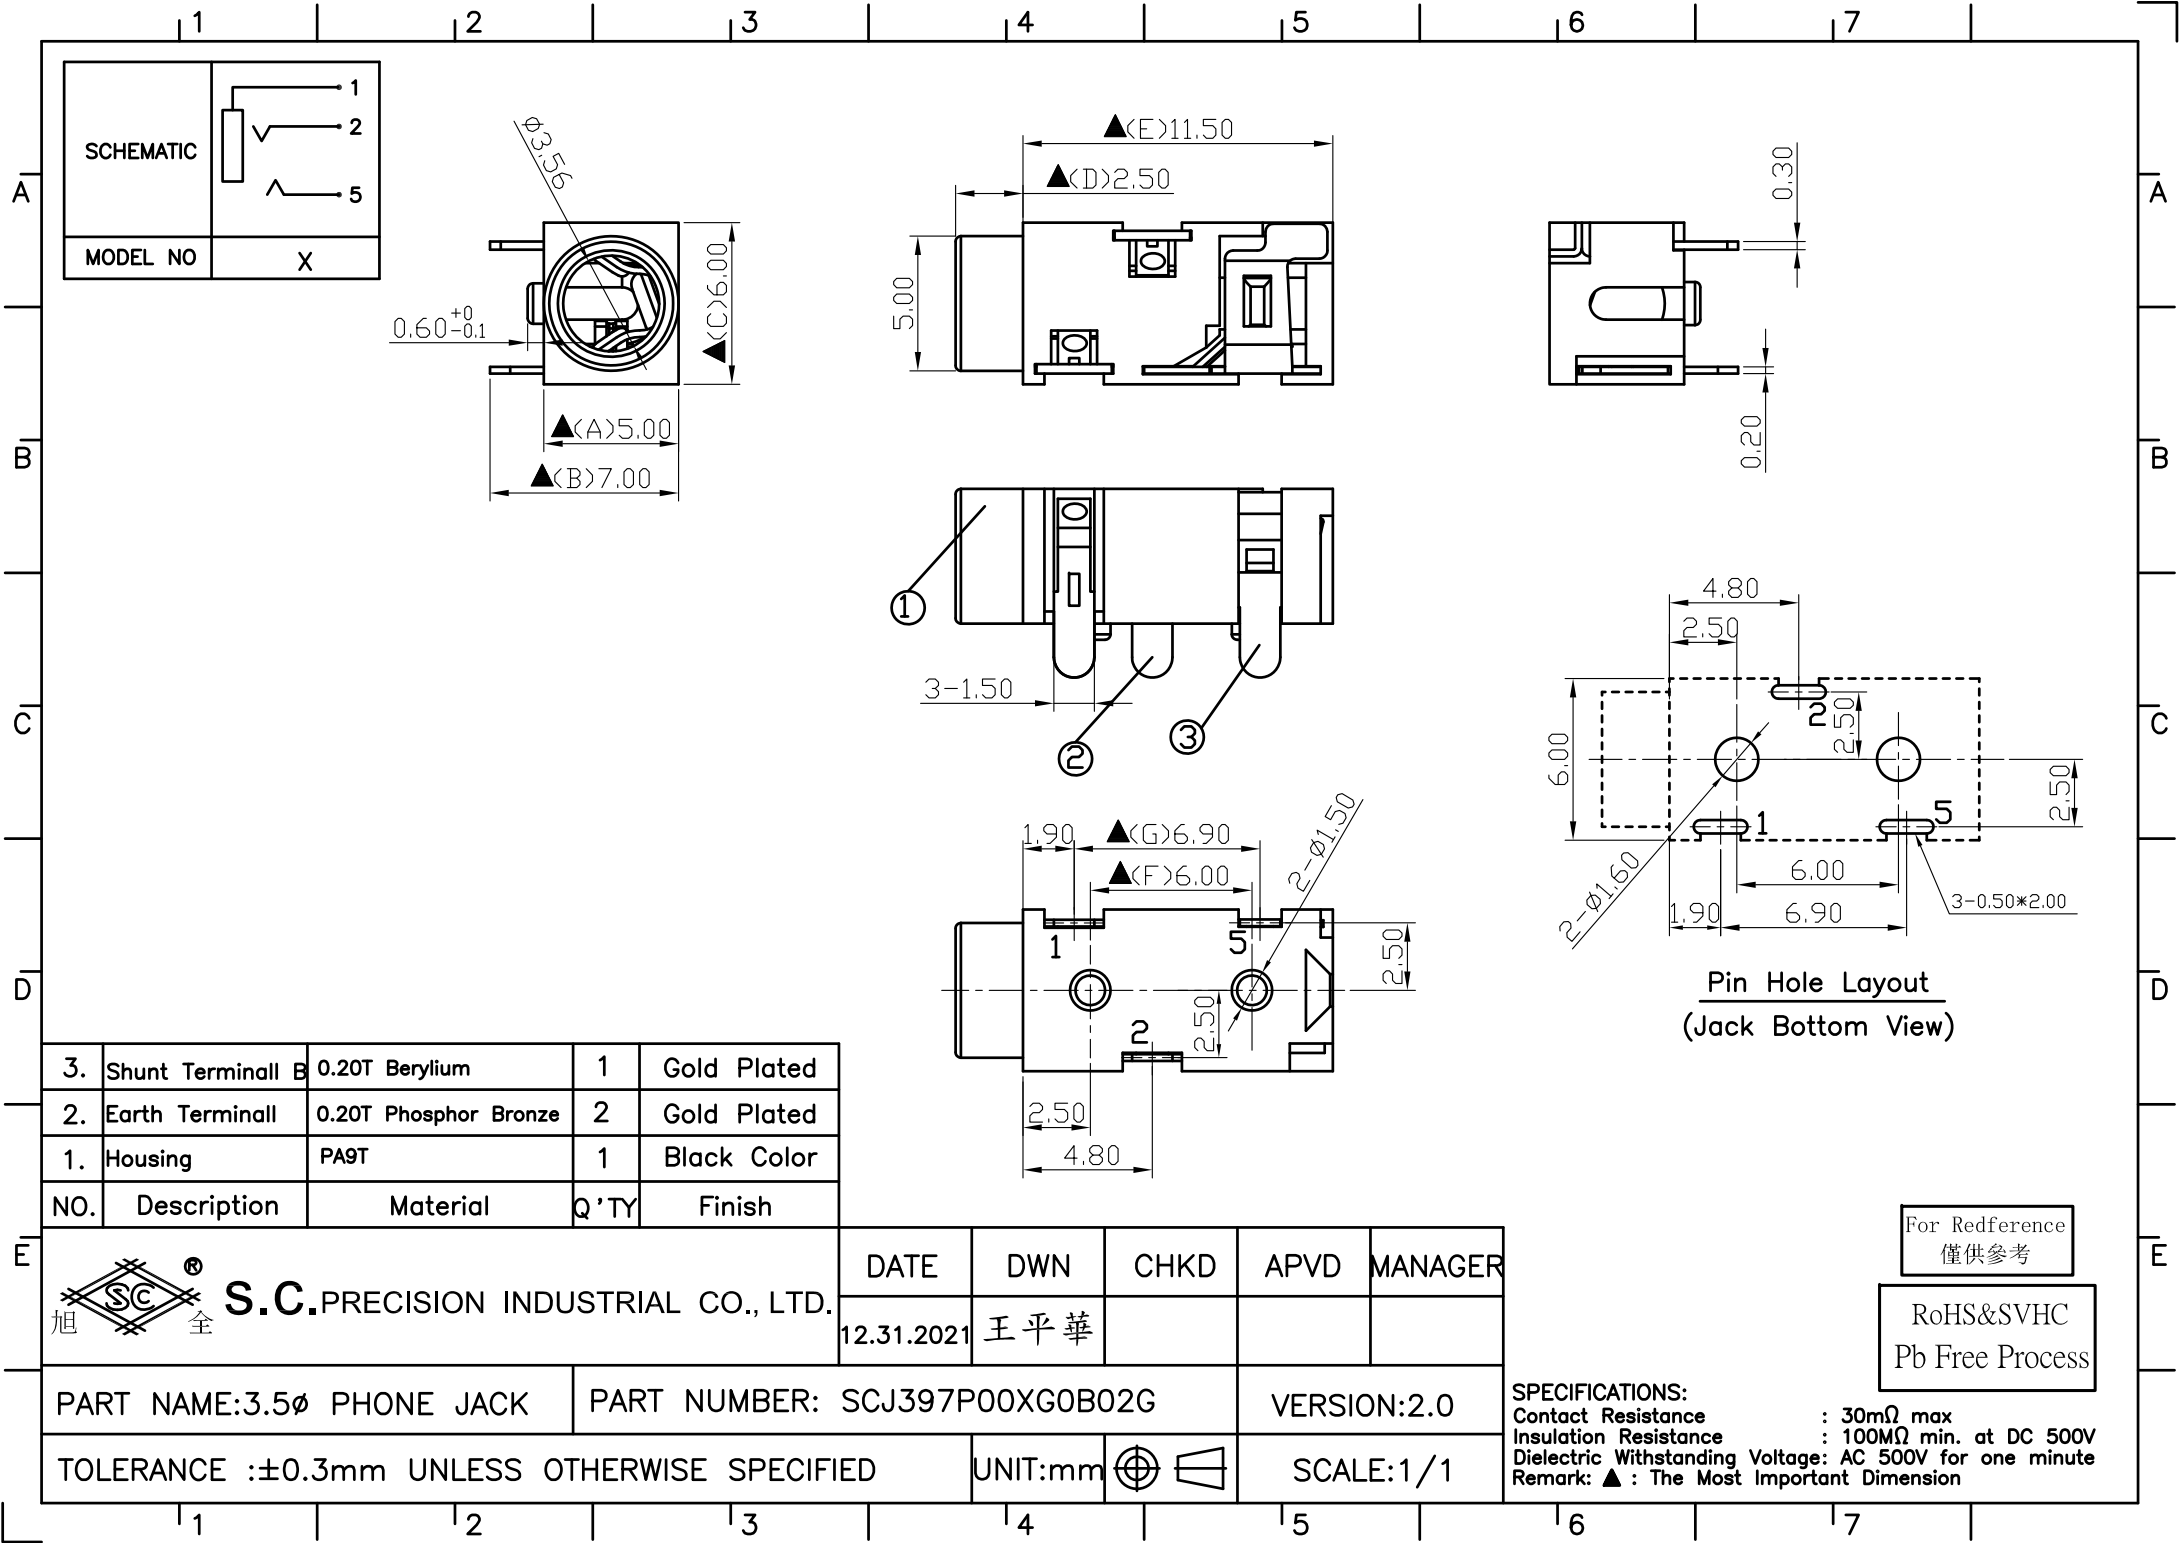
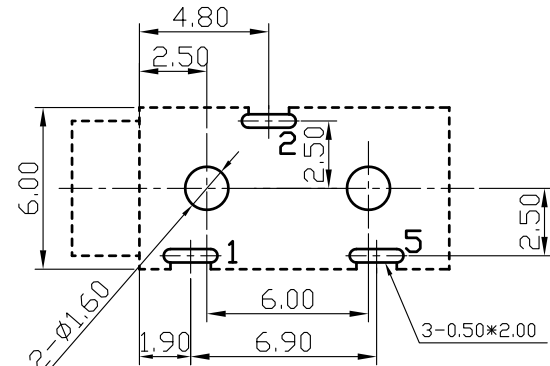
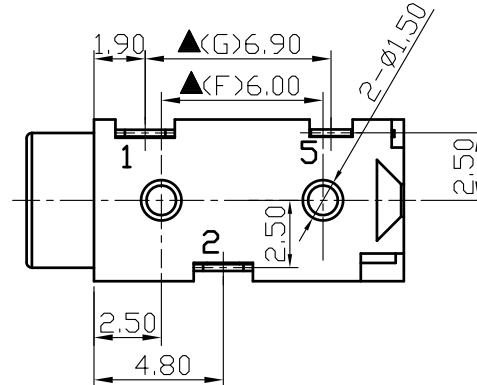
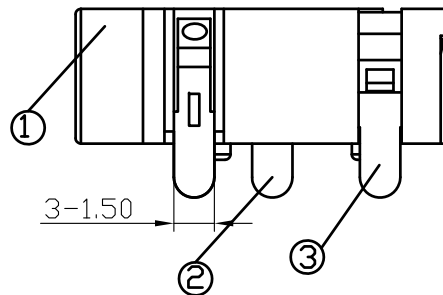



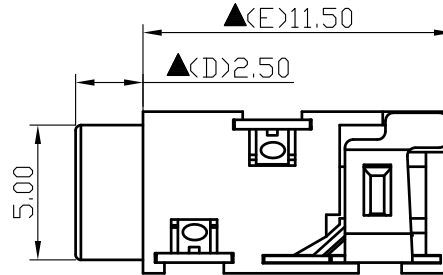

SCHEMATIC	
MODEL NO	X

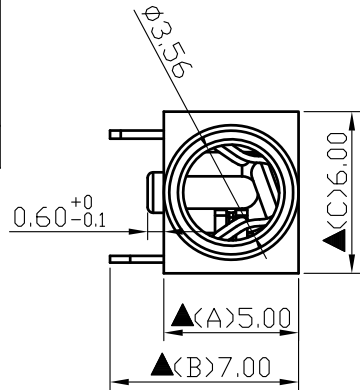

Pin Hole Layout
(Jack Bottom View)

3.	Shunt Terminal	0.20T Beryllium	1	Gold Plated
2.	Earth Terminal	0.20T Phosphor Bronze	2	Gold Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
		12.31.2021	王平華			

PART NAME:3.5ø PHONE JACK	PART NUMBER: SCJ397P00XG0B02G	VERSION:2.0
---------------------------	-------------------------------	-------------

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1
--	---------	-----------

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process