
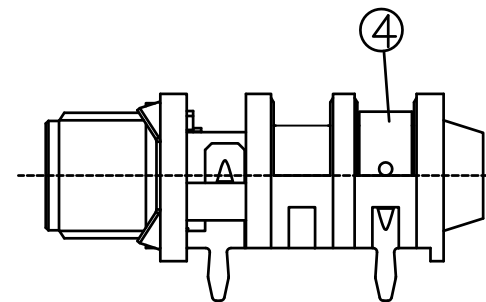
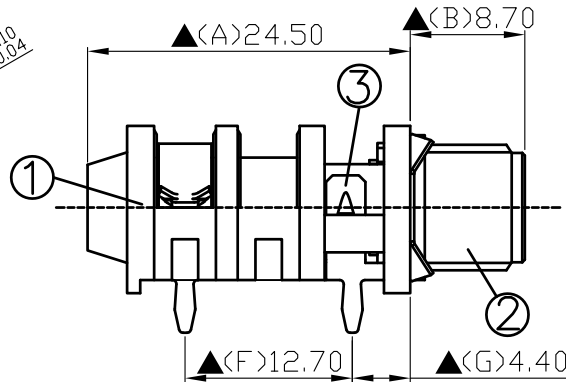
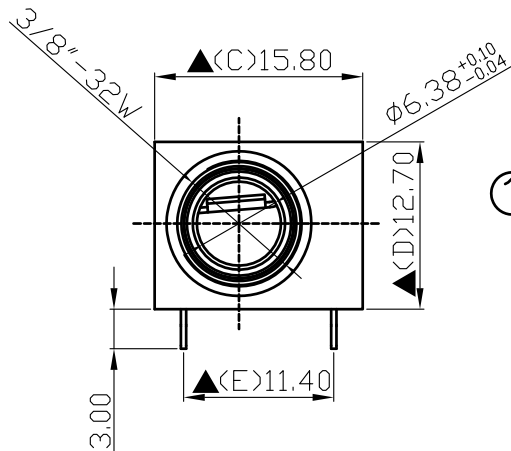

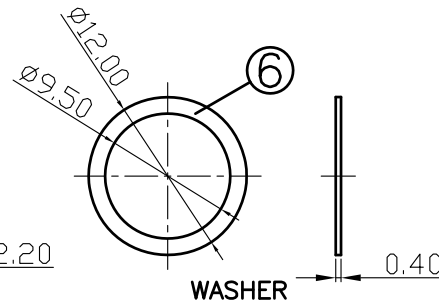


7.	Nut	Low Lead Brass Rod	1	Nickel Plated
6.	Washer	0.4T Brass	1	Nickel Plated
5.	Earth Spring	0.3T Steel	1	Nickel Plated
4.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Brass	1	Silver Plated
2.	Barrel	Low Lead Brass Rod	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish



Pin Hole Layout
(Jack Bottom View)

DATE	DWN	CHKD	APVD	MANAGER
03.28.2022	王平華			

DATE	DWN	CHKD	APVD	MANAGER
03.28.2022	王平華			

PART NAME : 6.3φ PHONE JACK	PART NUMBER: SCJ635M1NAS4BPOL	VERSION: 1.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:	
Contact Resistance	: 30mΩ max
Insulation Resistance	: 100MΩ min. at DC 500V
Dielectric Withstand Voltage	: AC 500V for one minute
Remark	: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process