

SCHEMATIC	
	MODEL NO E

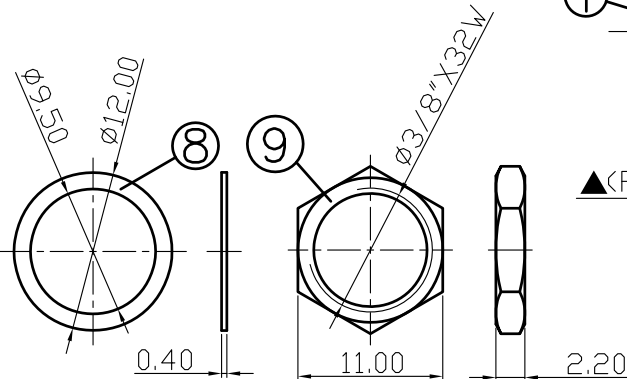
A

B

C

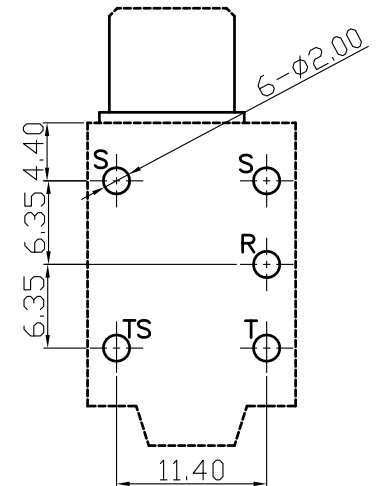
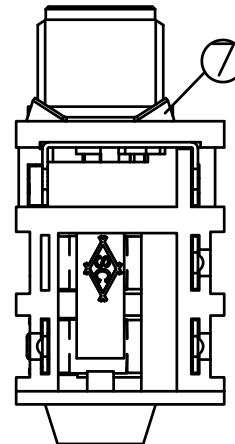

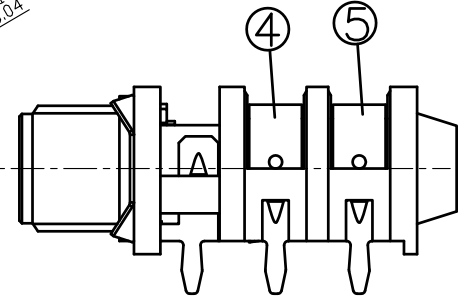
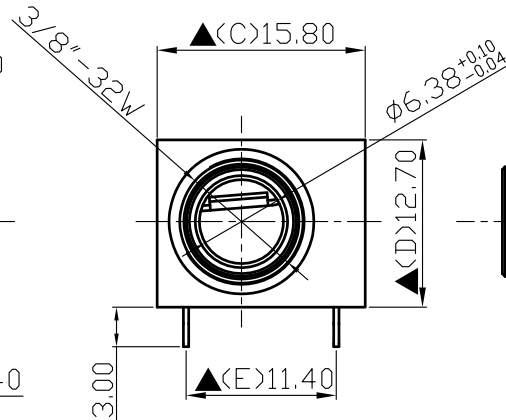
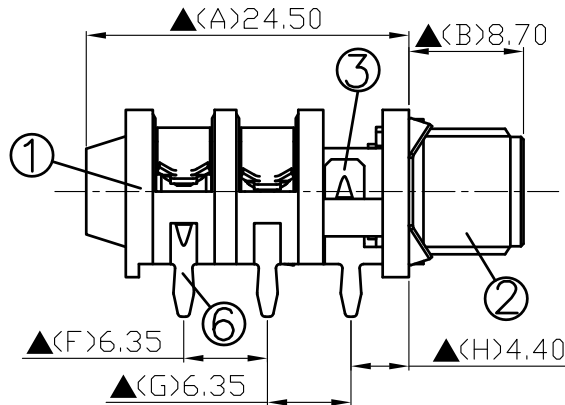
D

E



WASHER

NUT

Pin Hole Layout
(Jack Bottom View)

9.	Nut	Low Lead Brass Rod	1	Nickel Plated
8.	Washer	0.4T Brass	1	Nickel Plated
7.	Earth Spring	0.3T Steel	1	Nickel Plated
6.	Tip Shunt	0.4T Brass	1	Silver Plated
5.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Brass	1	Silver Plated
2.	Barrel	Low Lead Brass Rod	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.28.2022	王平華			

PART NAME : 6.3φ PHONE JACK

PART NUMBER: SCJ635M1NES4BPOL

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Pb Free Process

A

B

C

D

E