


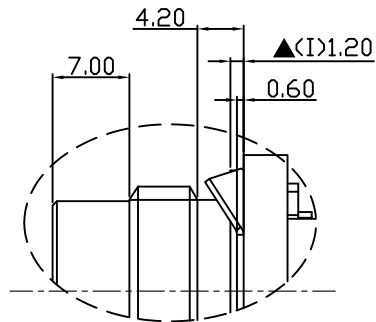

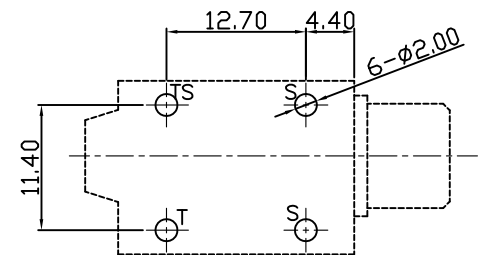
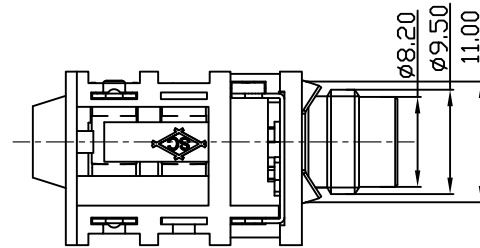
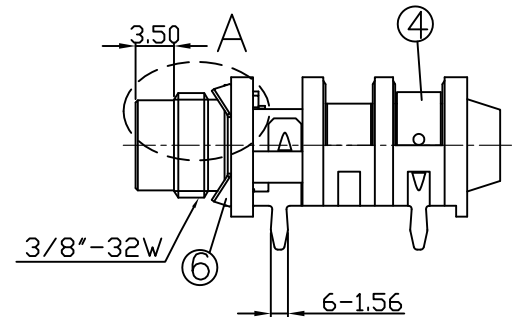


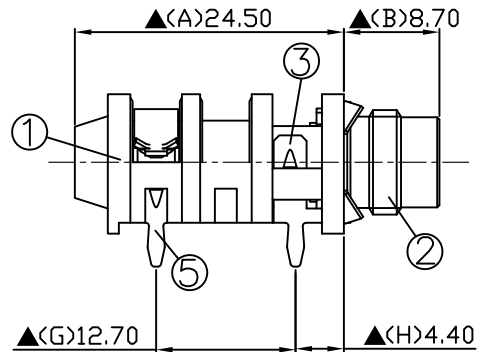


"A"Detail

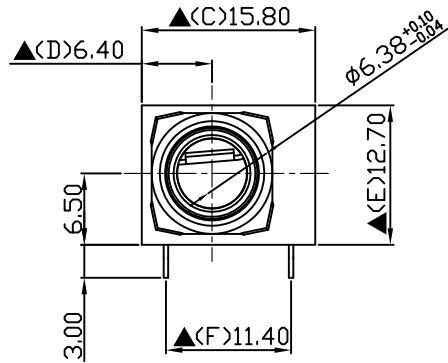

Pin Hole Layout
(Jack Bottom View)

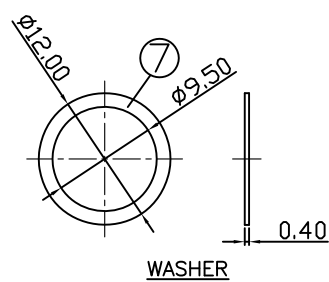

WASHER

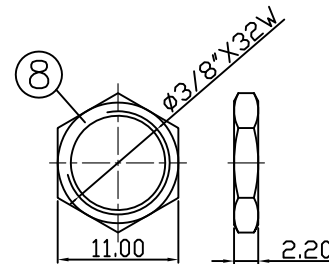

NUT

8.	Nut	Low Lead Brass Rod	1	Nickel Plated
7.	Washer	0.4T Brass	1	Nickel Plated
6.	Earth Spring	0.3T Steel	1	Nickel Plated
5.	Tip Shunt	0.4T Brass	1	Silver Plated
4.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Brass	1	Silver Plated
2.	Barrel	Low Lead Brass Rod	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		03.28.2022	王平華			

PART NAME : 6.3Ø PHONE JACK	PART NUMBER: SCJ635M6NBS4BP0L	VERSION: 1.0
-----------------------------	-------------------------------	--------------

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: /
---	----------	----------

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark : ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process