

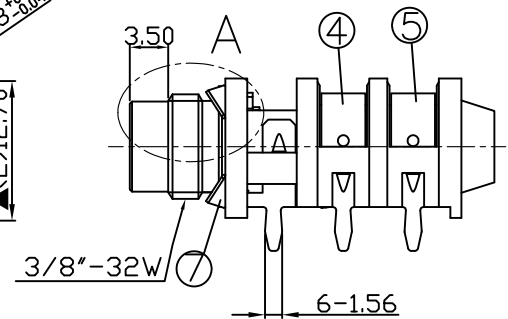
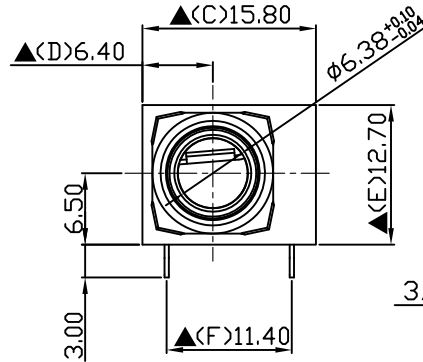
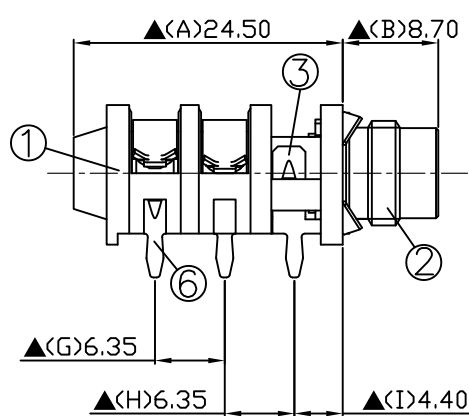
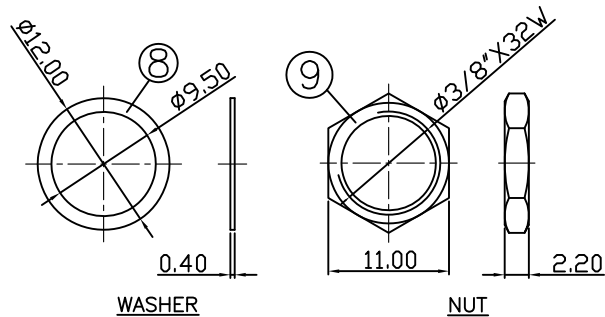
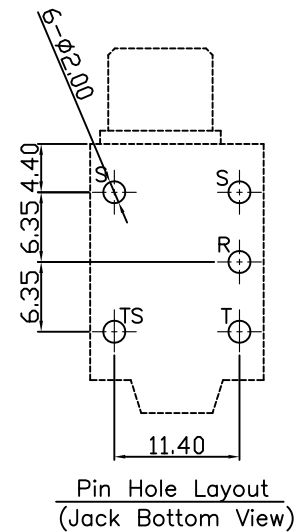


SCHEMATIC	
MODEL NO	E

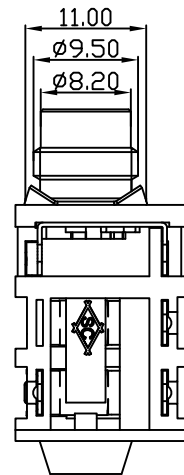

9.	Nut	Low Lead Brass Rod	1	Nickel Plated
8.	Washer	0.4T Brass	1	Nickel Plated
7.	Earth Spring	0.3T Steel	1	Nickel Plated
6.	Tip Shunt	0.4T Brass	1	Silver Plated
5.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Brass	1	Silver Plated
2.	Barrel	Low Lead Brass Rod	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish

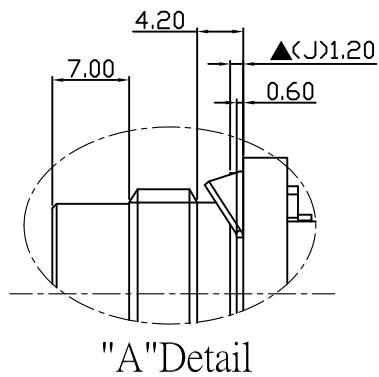

S.C. PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
		03.28.2022	王平華			

PART NAME : 6.3 ϕ PHONE JACK	PART NUMBER: SCJ635M6NES4BP0L	VERSION: 1.0
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: /

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process