

|           |   |
|-----------|---|
| SCHEMATIC |   |
| MODEL NO  | E |

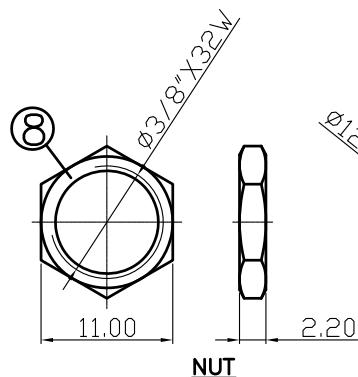
A

B


C

D

E



NUT

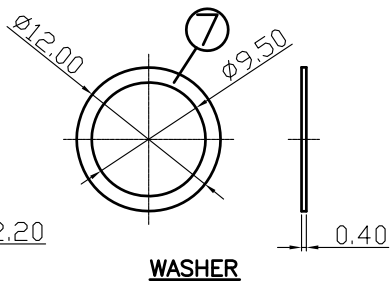

WASHER

|     |              |                      |      |               |
|-----|--------------|----------------------|------|---------------|
| 8.  | Nut          | Low Lead Brass Rod   | 1    | Nickel Plated |
| 7.  | Washer       | 0.4T Brass           | 1    | Nickel Plated |
| 6.  | Tip Shunt    | 0.4T Brass           | 1    | Silver Plated |
| 5.  | Tip Spring   | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 4.  | Ring Spring  | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 3.  | Sleeve Shunt | 0.4T Brass           | 1    | Silver Plated |
| 2.  | Barrel       | Low Lead Brass Rod   | 1    | Nickel Plated |
| 1.  | Housing      | PA66                 | 1    | Black Color   |
| NO. | Description  | Material             | Q'TY | Finish        |



S.C.PRECISION INDUSTRIAL CO., LTD.

|            |     |      |      |         |
|------------|-----|------|------|---------|
| DATE       | DWN | CHKD | APVD | MANAGER |
| 03.29.2022 | 王平華 |      |      |         |


PART NAME : 6.3 $\phi$  PHONE JACK

PART NUMBER: SCJ636M1NES4BP0L






VERSION: 1.0

TOLERANCE :  $\pm 0.3\text{mm}$  UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

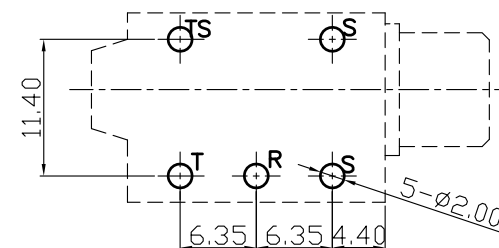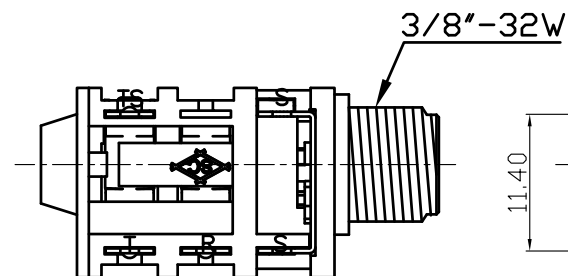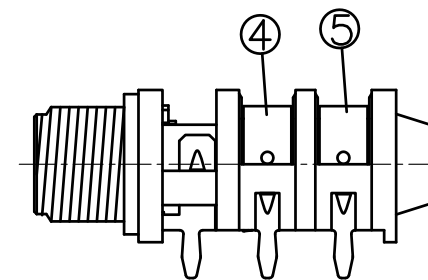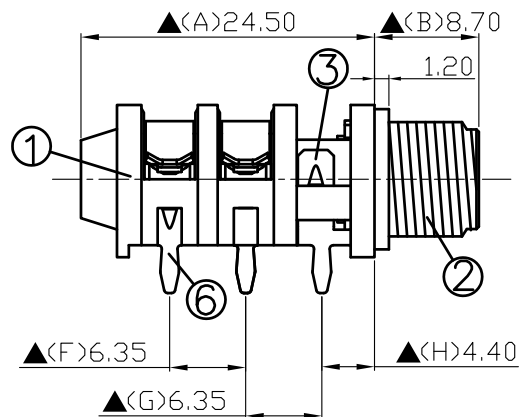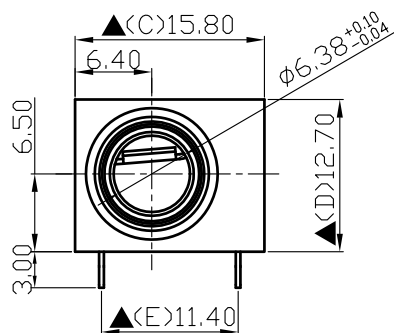Pin Hole Layout  
(Jack Bottom View)For Redference  
僅供參考RoHS&SVHC  
Pb Free Process

**SPECIFICATIONS:**  
Contact Resistance : 30m $\Omega$  max  
Insulation Resistance : 100M $\Omega$  min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲ : The Most Important Dimension