

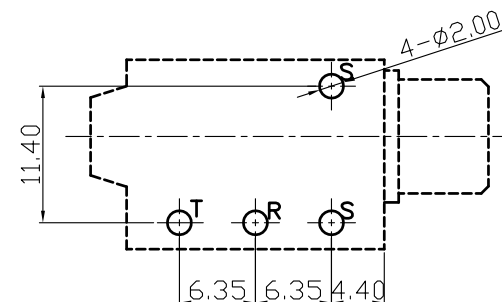
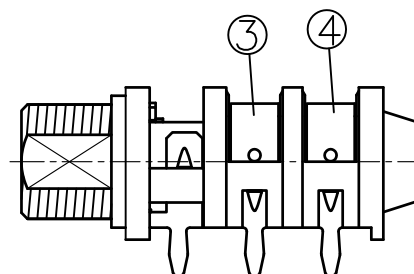
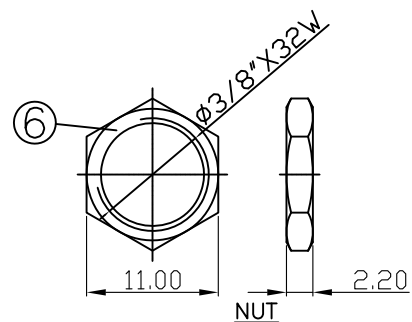
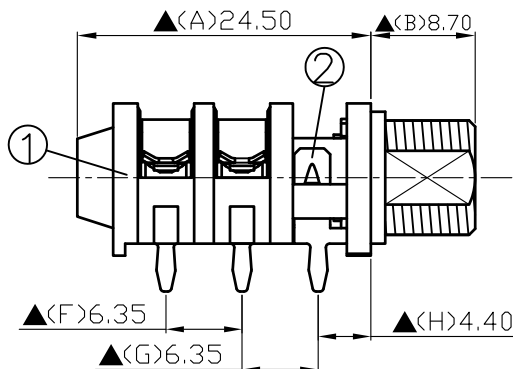


SCHEMATIC	
MODEL NO	C

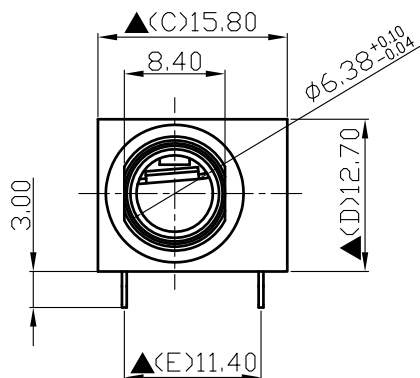

Pin Hole Layout
(Jack Bottom View)

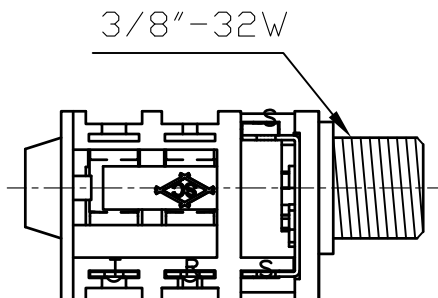

6.	Nut	Low Lead Brass Rod	1	Nickel Plated
5.	Washer	0.4T Brass	1	Nickel Plated
4.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
2.	Sleeve Shunt	0.4T Brass	1	Silver Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD

DATE	DWN	CHKD	APVD	MANAGER
03.30.2022	王平華			


PART NAME : 6.3mm PHONE JACK

PART NUMBER: SCJ636P20CS4BP0L

VERSION:1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark:▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process