

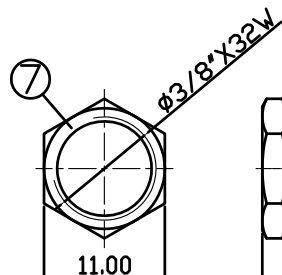
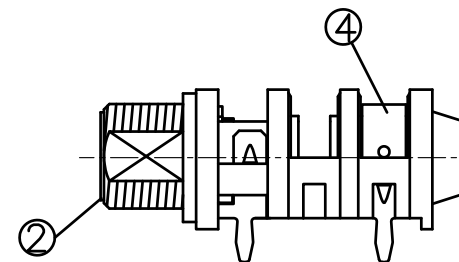
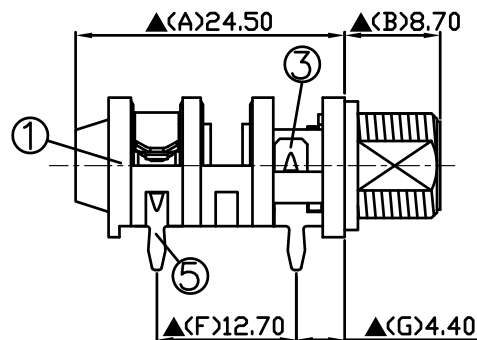





SCHEMATIC	
MODEL NO	B

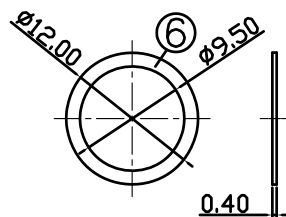

NUT



WASHER

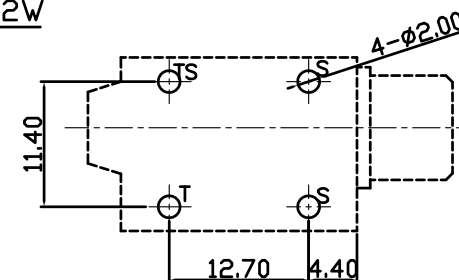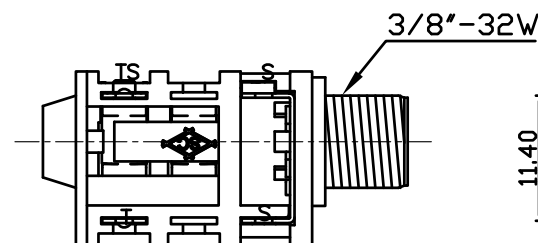

Pin Hole Layout
(Jack Bottom View)

7.	Nut	Low Lead Brass Rod	1	Nickel Plated
6.	Washer	0.4T Brass	1	Nickel Plated
5.	Tip Shunt	0.4T Brass	1	Silver Plated
4.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Brass	1	Silver Plated
2.	Barrel	Low Lead Brass Rod	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
03.31.2022	王平華			

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ636R6NBS4BP0L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

For Redderence
僅供參考

RoHS&SVHC
Pb Free Process