
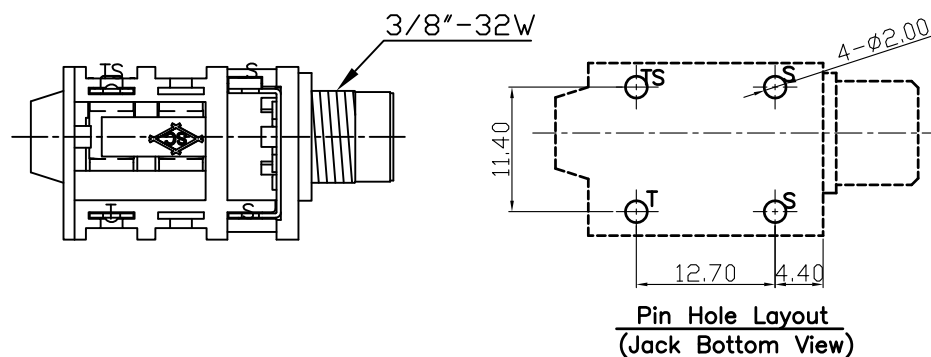
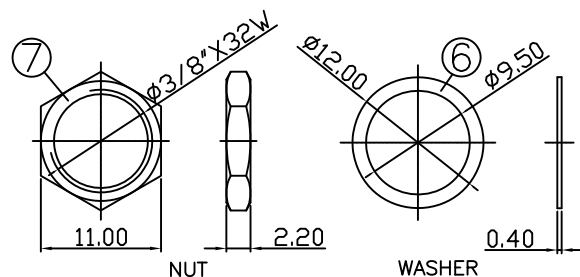
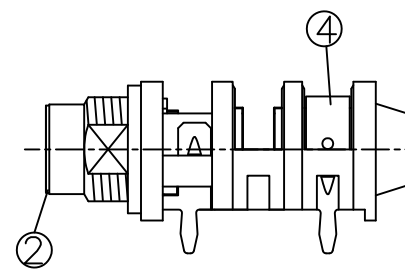
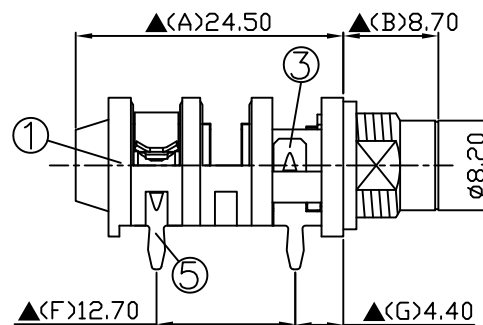


SCHEMATIC	
MODEL NO	B

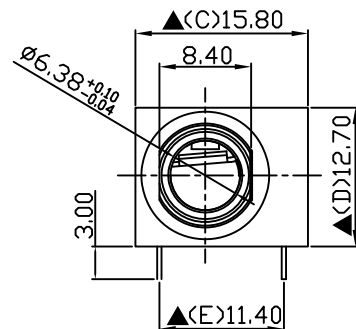

7.	Nut	Low Lead Brass Rod	1	Nickel Plated
6.	Washer	0.4T Brass	1	Nickel Plated
5.	Tip Shunt	0.4T Brass	1	Silver Plated
4.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Brass	1	Silver Plated
2.	Barrel	Low Lead Brass Rod	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish

	DATE				DWN	CHKD	APVD	MANAGER
	03.31.2022				王平華			

PART NAME : 6.3 ϕ PHONE JACK		PART NUMBER: SCJ636R0NBS4BP0L			VERSION: 1.0	
TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED				UNIT: mm		SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考
RoHS&SVHC
Pb Free Process