


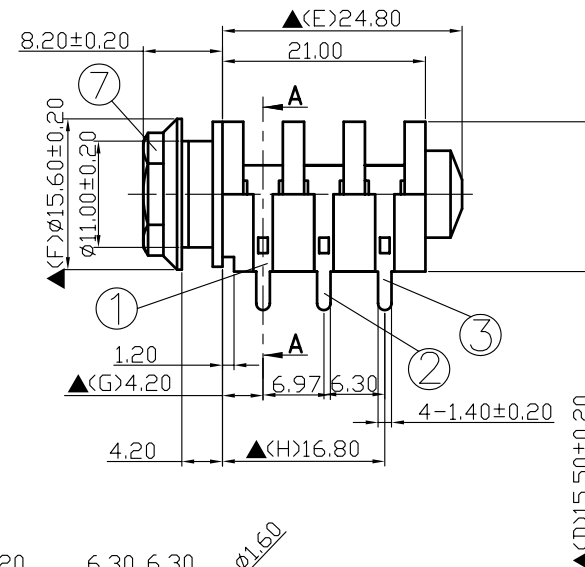
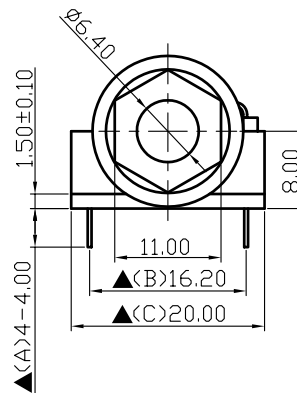


|           |   |
|-----------|---|
| SCHEMATIC |   |
| MODEL NO  | E |

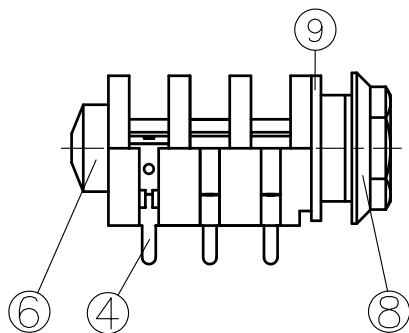

A-A剖面



Pin Hole Layout  
(Jack Bottom View)

|     |               |                      |      |               |
|-----|---------------|----------------------|------|---------------|
| 9.  | Washer        | PAPER SHEET t1.0     | 1    | Red Color     |
| 8.  | Bushing       | PA66                 | 1    | Black Color   |
| 7.  | Nut-Metal     | Brass                | 1    | Nickel Plated |
| 6.  | Housing       | PA66                 | 1    | Black Color   |
| 5.  | Bottom Spring | 0.4T Phosphor Bronze | 1    | Tin Plated    |
| 4.  | Tip Shunt     | 0.4T Bronze          | 1    | Tin Plated    |
| 3.  | Tip Spring    | 0.4T Phosphor Bronze | 1    | Tin Plated    |
| 2.  | Tip Spring    | 0.4T Phosphor Bronze | 1    | Tin Plated    |
| 1.  | Sleeve Spring | 0.4T Phosphor Bronze | 1    | Tin Plated    |
| NO. | Description   | Material             | Q'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 11.01.2012 |     |      |      |         |

PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ647R5NET0BPOG

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

RoHS  
Pb Free Process

For Reference  
僅供參考

SPECIFICATIONS:

See "Details of Environment-Related Substance"  
Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension