
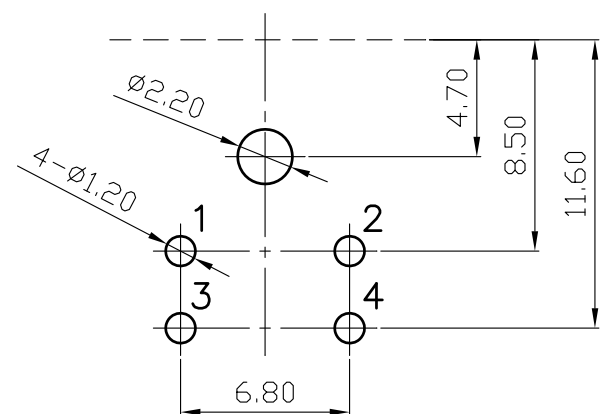
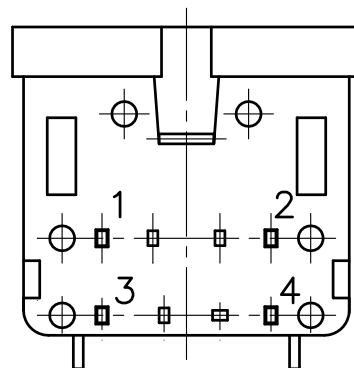
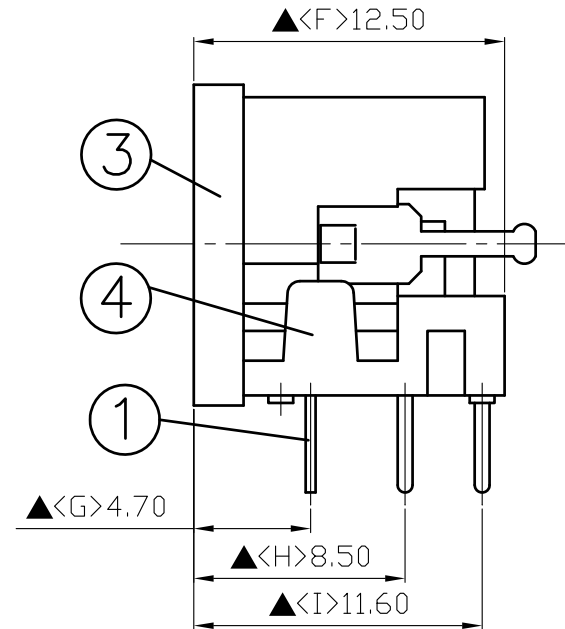
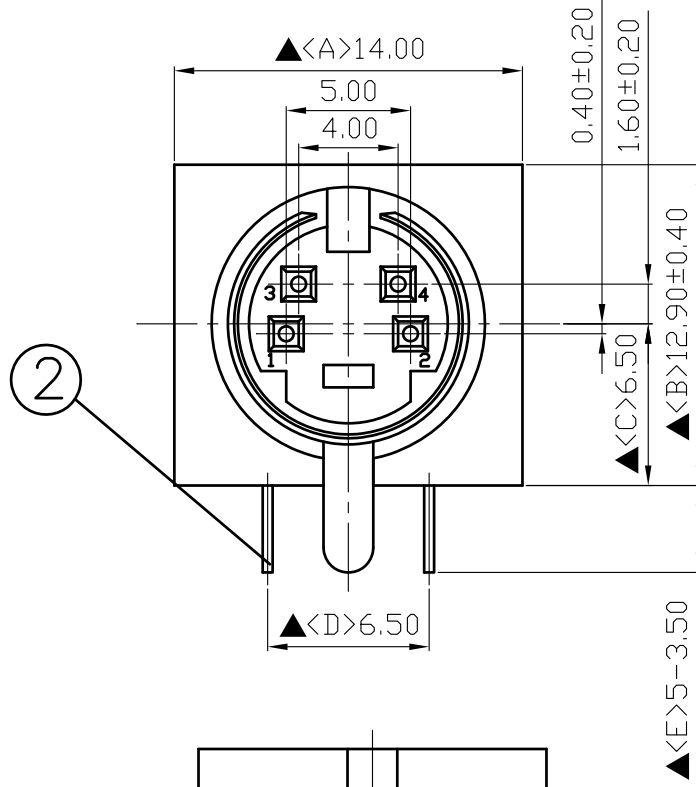


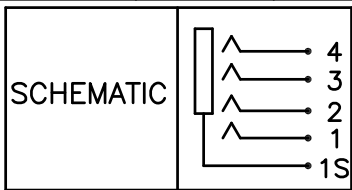

|     |              |                      |      |               |
|-----|--------------|----------------------|------|---------------|
| 4.  | Base         | PBT+30%              | 1    | Black Color   |
| 3.  | Body         | PBT+30%              | 1    | Black Color   |
| 2.  | Contact      | 0.4T Brass           | 4    | Silver Plated |
| 1.  | Inner Shield | 0.4T Phosphor Bronze | 1    | Nickel Plated |
| NO. | Description  | Material             | Q'TY | Finish        |

|                                                                                                                        |            |     |      |      |         |
|------------------------------------------------------------------------------------------------------------------------|------------|-----|------|------|---------|
|  S.C. PRECISION INDUSTRIAL CO., LTD. | DATE       | DWN | CHKD | APVD | MANAGER |
|                                                                                                                        | 01.18.2022 | 王平華 |      |      |         |

|                                             |                              |             |
|---------------------------------------------|------------------------------|-------------|
| PART NAME:MINI DIN JACK                     | PART NUMBER:SCN550S4NS0B000G | VERSION:6.0 |
| TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm                      | SCALE:1/1   |

Pin Hole Layout (Jack Bottom View)

For Redference  
僅供參考

RoHS&SVHC  
Compliant

SPECIFICATIONS:  
Contact Resistance :30mΩ max  
Insulation Resistance :100MΩ min.at DC500V  
Dielectric Withstand Voltage:AC 500V for one minute  
Remark:▲:The Most Important Dimension