
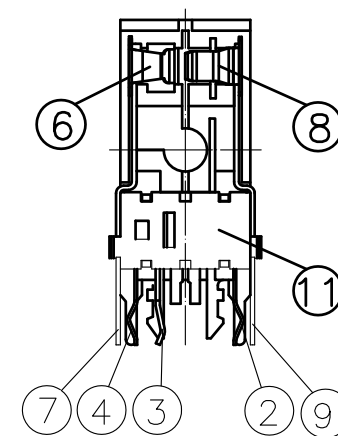
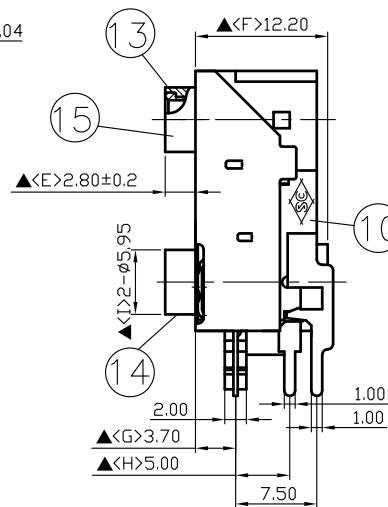
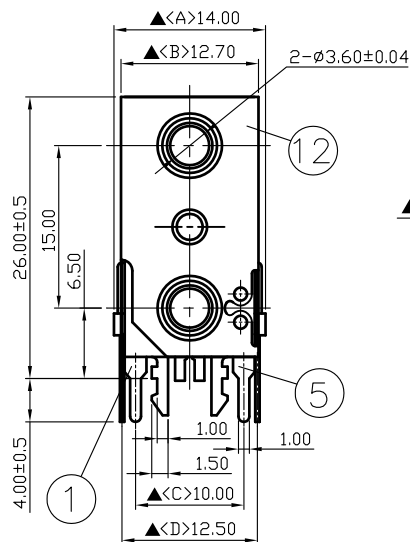


Pin Hole Layout
(Jack Bottom View)

15.	Bushing(TOP)	PBT+30%	1	577C Green Color
14.	Bushing(DOWN)	PBT+30%	1	701C Pink Color
13.	Sleeve(Barrel)	Low Lead Brass Rod	2	Nickel Plated
12.	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
11.	Cover	PBT+15%	1	Black Color
10.	Housing	PBT	1	Black Color
9.	TipVLead(TOP)	0.4T Brass	1	Silver Plated
8.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
7.	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
6.	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
5.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
4.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
3.	Break Terminal(DOWN)	0.4T Bronze	1	Silver Plated
2.	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.03.2024	王放策			

For Rederence
僅供參考

RoHS&SVHC
Compliant

PART NAME :3.5ø PHONE JACK	PART NUMBER: SCJ351M5NVSGPN4L	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension