

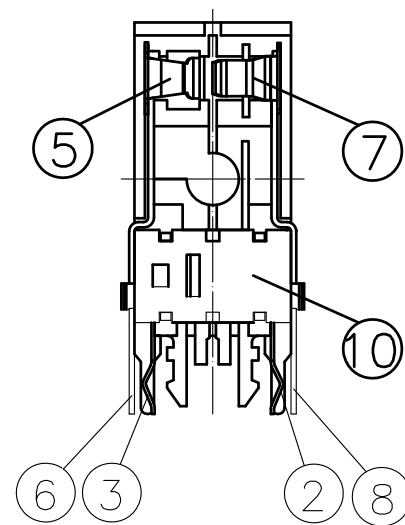
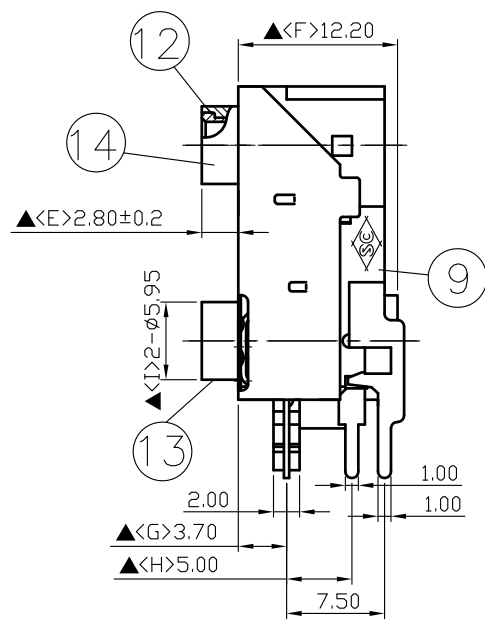
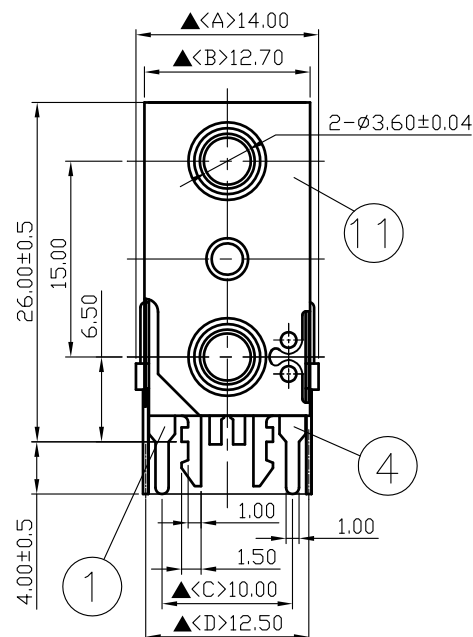


A
B
C
D
E



14.	Bushing(TOP)	PBT+30%	1	577C Green Color
13.	Bushing(DOWN)	PBT+30%	1	701C Pink Color
12.	Sleeve(Barrel)	Low Lead Brass Rod	1	Nickel Plated
11.	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
10.	Cover	PBT+15%	1	Black Color
9.	Housing	PBT	1	Black Color
8.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
7.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
6.	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
5.	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
4.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
3.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
2.	Ring Spring(DOWN)	0.3T Brass	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

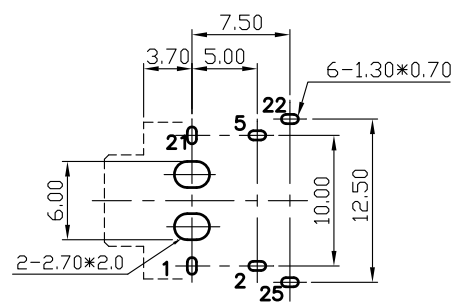

Pin Hole Layout
(Jack Bottom View)

For Redference
僅供參考

RoHS&SVHC
Compliant

 S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	06.03.2023	王放策			

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ351M5NXSGPN4L	VERSION: 4.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm 	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension