

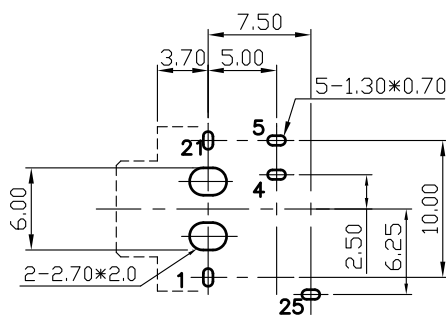
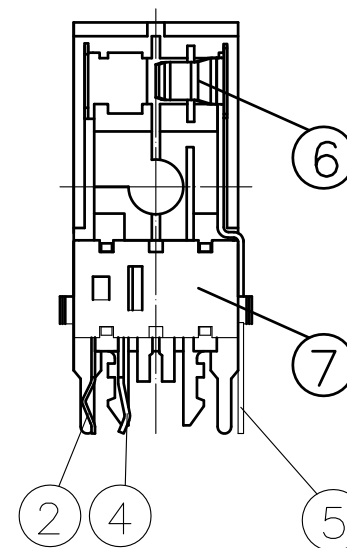
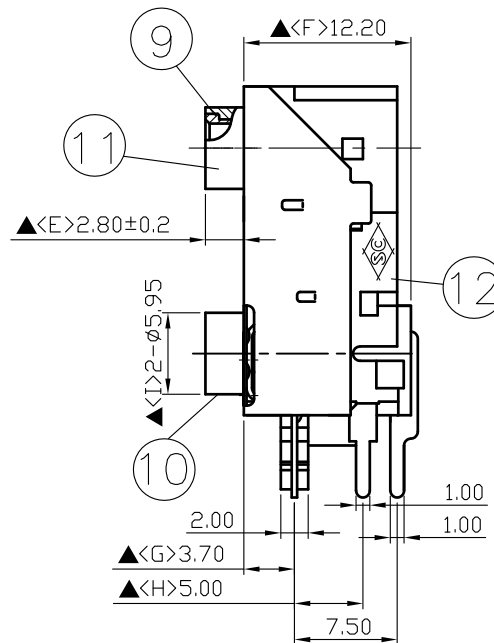


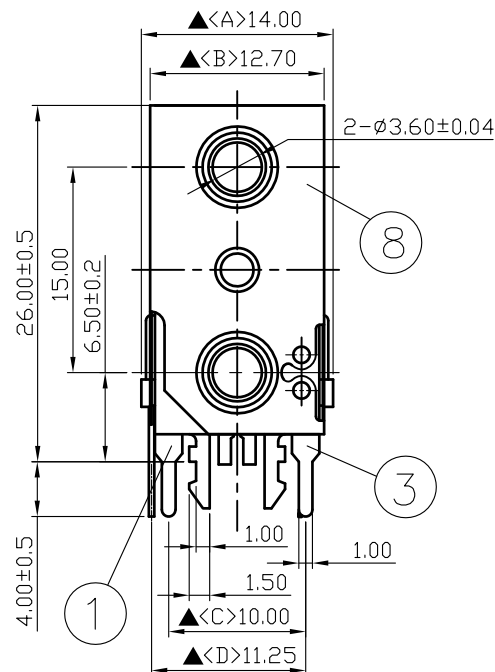

Pin Hole Layout
(Jack Bottom View)

12.	Housing	PBT	1	Black Color
11.	Bushing(TOP)	PBT+30%	1	577C Green Color
10.	Bushing(DOWN)	PBT+30%	1	701C Pink Color
9.	Sleeve(Barrel)	Low Lead Brass Rod	2	Nickel Plated
8.	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
7.	Cover	PBT+15%	1	Black Color
6.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
5.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
4.	Break Terminal(DOWN)	0.4T Brass	1	Silver Plated
3.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
2.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

06.03.2024

王放策

PART NAME : 3.5φ PHONE JACK

PART NUMBER : SCJ351M5NYSGPN4L

VERSION:1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension