

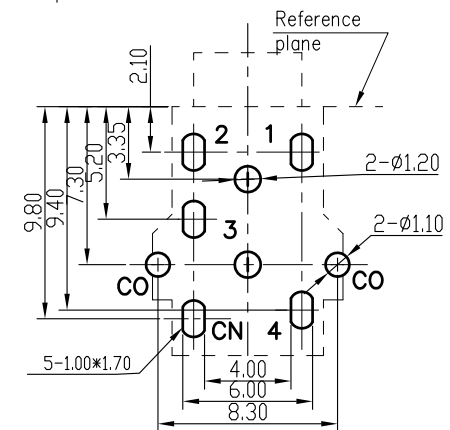
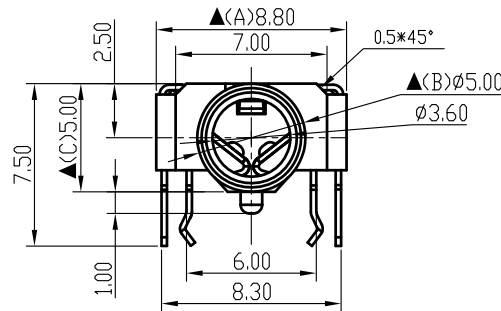

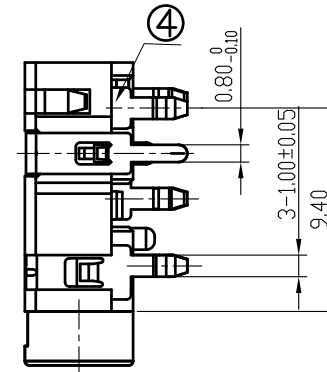

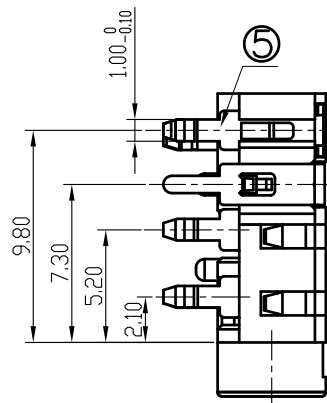


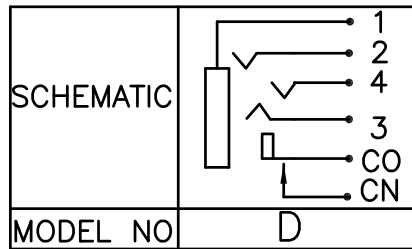

Pin Hole Layout
(Jack Bottom View)

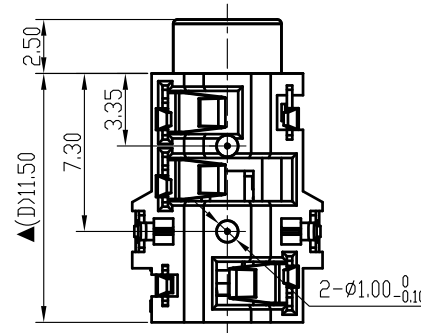

5.	Make Contct	0.25T Brass	1	Silver Plated
4.	Contact	0.25T Phosphor Bronze	3	Silver Plated
3.	Transfer Contct	0.25T Phosphor Bronze	1	Silver Plated
2.	Earth Contct	0.25T Phosphor Bronze	1	Silver Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish

	S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
		09.01.2020	王平華			

PART NAME : 3.5Ø PHONE JACK	PART NUMBER: SCJ306P00DS0B00G	VERSION: 5.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參攷

RoHS&SVHC
Pb Free Process