

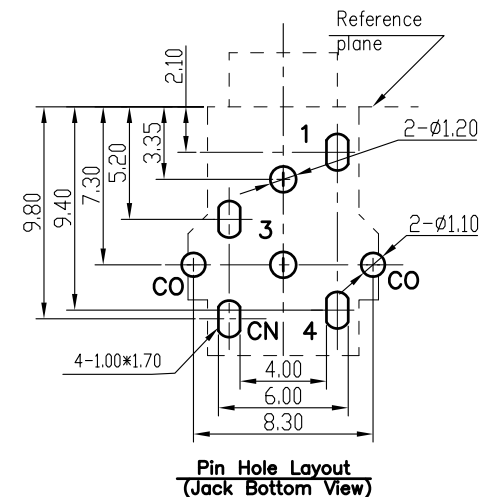
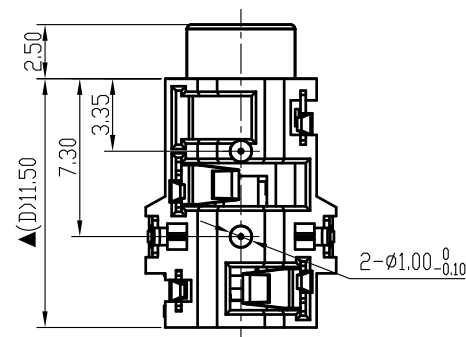
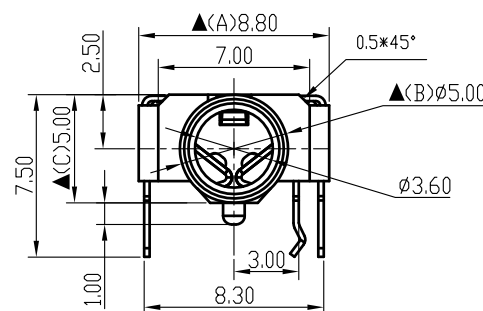




5.	Make Contct	0.25T Brass	1	Silver Plated
4.	Contact	0.25T Phosphor Bronze	2	Silver Plated
3.	Transfer Contct	0.25T Phosphor Bronze	1	Silver Plated
2.	Earth Contct	0.25T Phosphor Bronze	1	Silver Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q 'TY	Finish

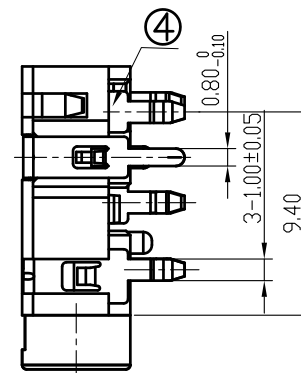

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.01.2020	王平華			

PART NAME :3.5ø PHONE JACK

PART NUMBER: SCJ306P00RS0B00G

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1 / 1

SPECIFICATIONS:

Specifications: Contact Resistance : 30mΩ max	
--	--

Contact Resistance	: 50mΩ max.
Insulation Resistance	: 100MΩ min. at DC 500V

Dielectric Withstanding Voltage: AC 500V for one minute

Remark: ▲: The Most Important Dimension

For Redference
僅供參攷

RoHS&SVHC
Pb Free Process