

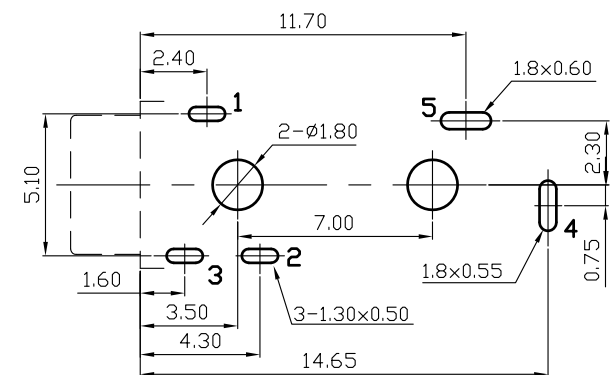
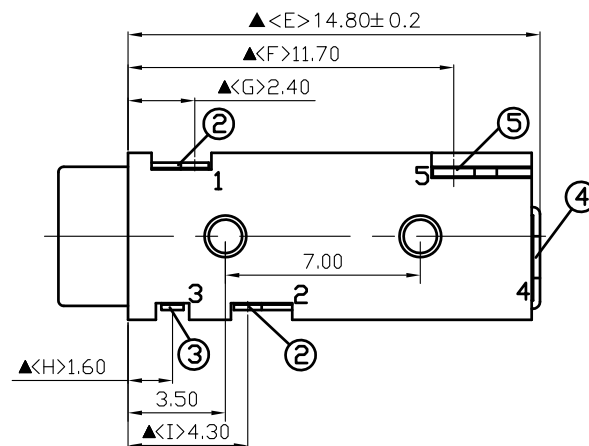

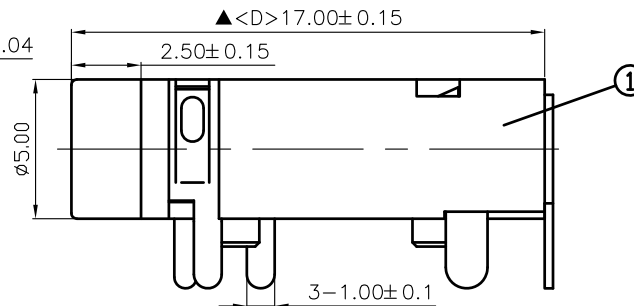


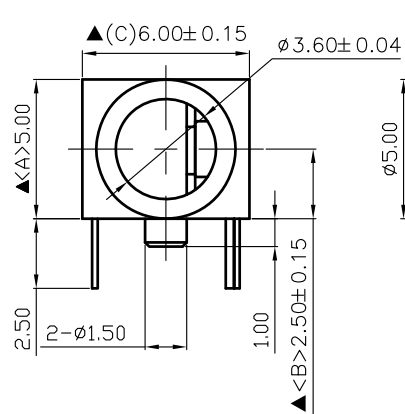

Pin Hole Layout
(Jack Bottom View)

5.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
4.	Shunt Terminall	0.3T Bronze	1	Silver Plated
3.	Shunt Terminall	0.2T Bronze	1	Silver Plated
2.	Earth Terminall	0.2T Phosphor Bronze	2	Silver Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.02.2020	王平華			


PART NAME: 3.5φ PHONE JACK

PART NUMBER: SCJ315P00USOB00G

VERSION: 4.0

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max.
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參攷

RoHS&SVHC
Pb Free Process