

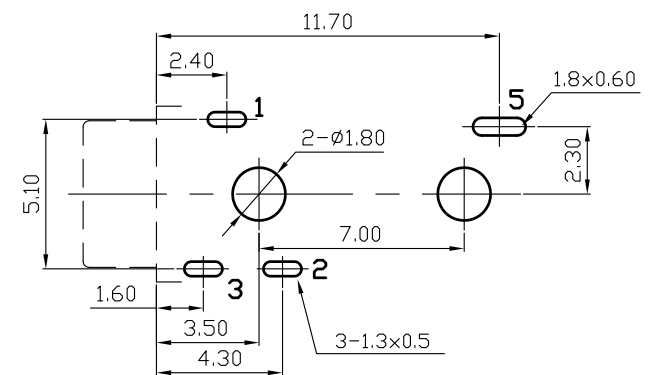
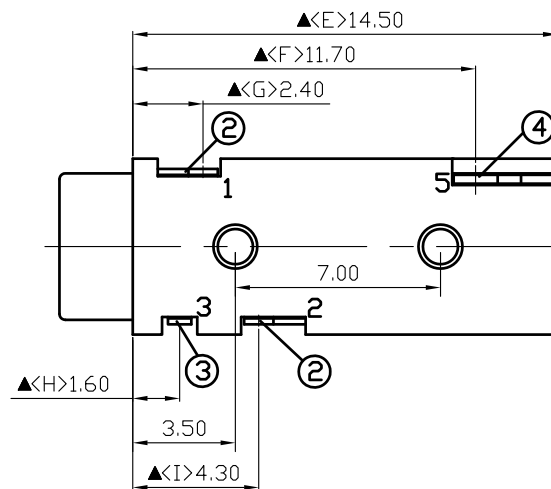

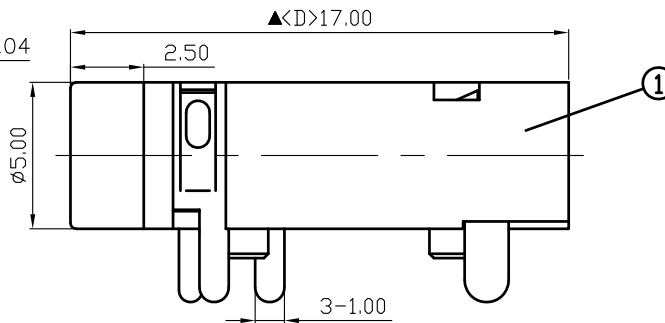


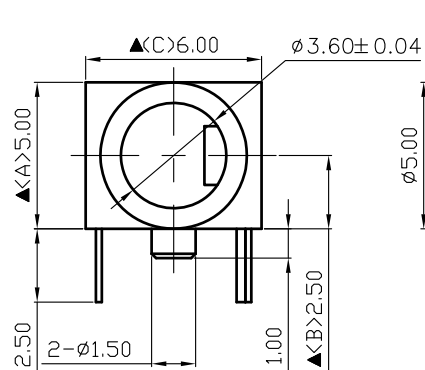

Pin Hole Layout
(Jack Bottom View)

4.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
3.	Shunt Terminall	0.2T Bronze	1	Silver Plated
2.	Earth Terminall	0.2T Phosphor Bronze	2	Silver Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.02.2020	王平華			

PART NAME:3.5 ϕ PHONE JACK

PART NUMBER:SCJ315P00WS0B00G

VERSION:4.0

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance :30m Ω max
 Insulation Resistance :100M Ω min.at DC500V
 Dielectric Withstand Voltage:AC 500V for one minute
 Remark:▲:The Most Important Dimension

For Redference
僅供參攷

RoHS&SVHC
Pb Free Process