





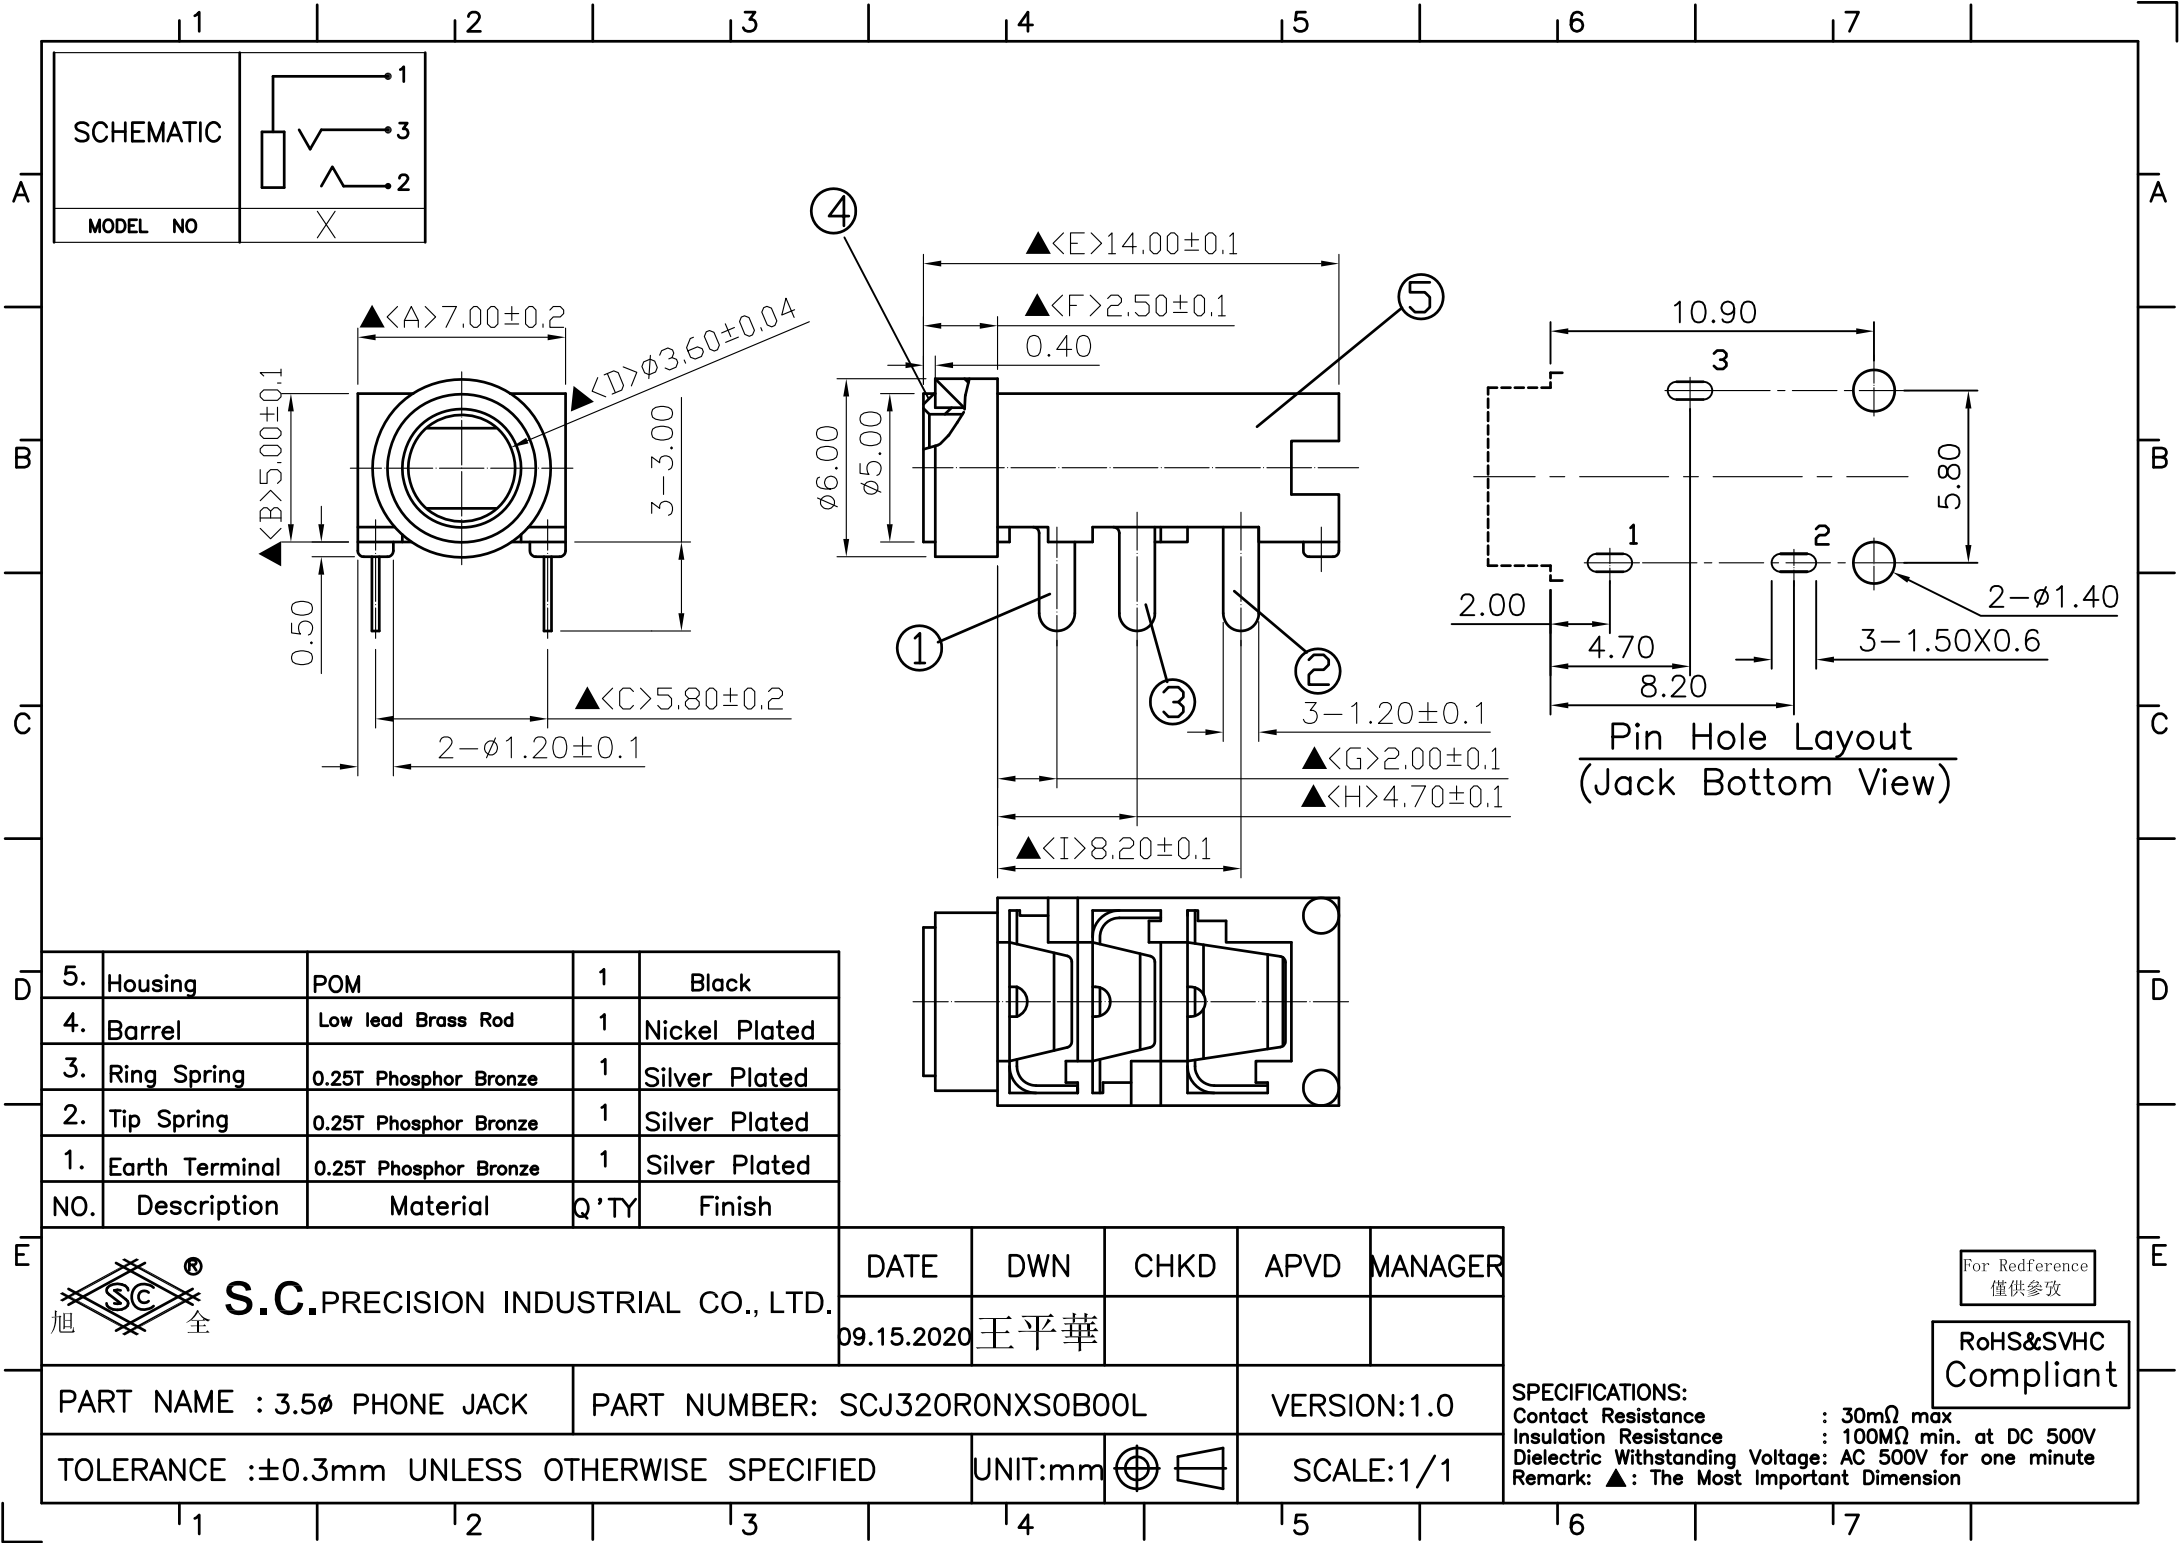


SCHEMATIC



MODEL NO

X

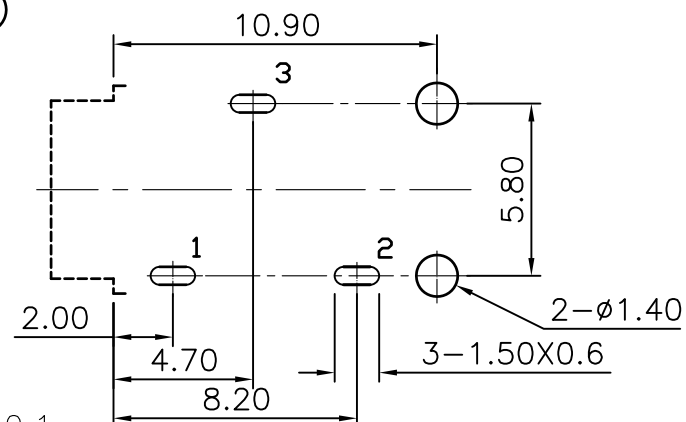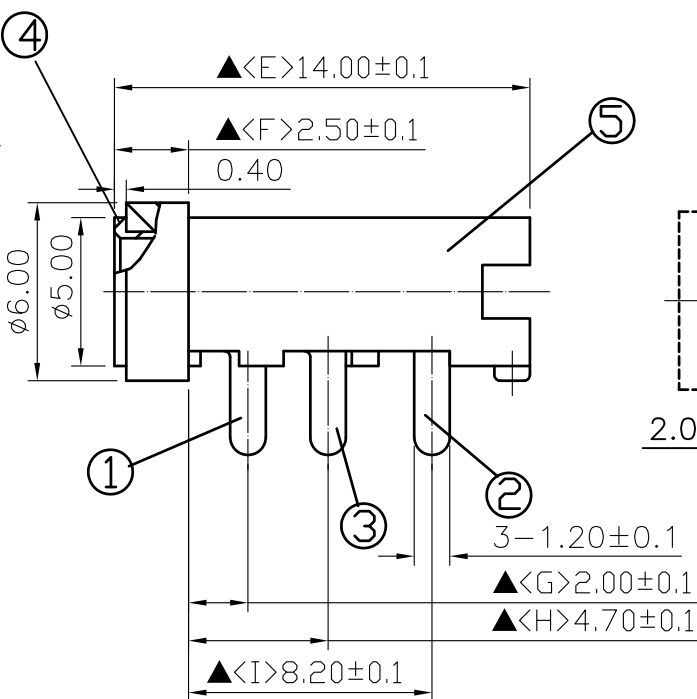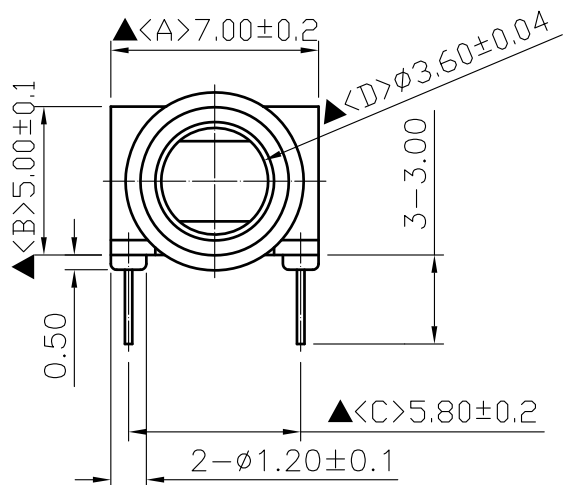

Pin Hole Layout
(Jack Bottom View)

5.	Housing	POM	1	Black
4.	Barrel	Low lead Brass Rod	1	Nickel Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.15.2020	王平華			

PART NAME : 3.5φ PHONE JACK PART NUMBER: SCJ320RONXS0B00L VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED UNIT:mm SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參攷

RoHS&SVHC
Compliant