


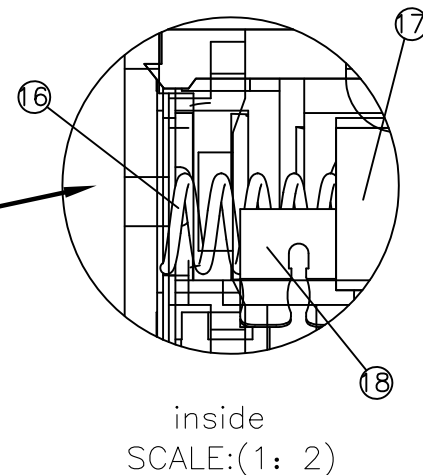
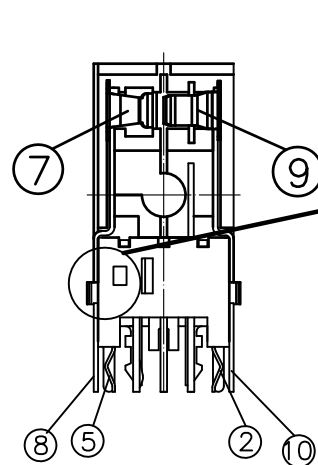
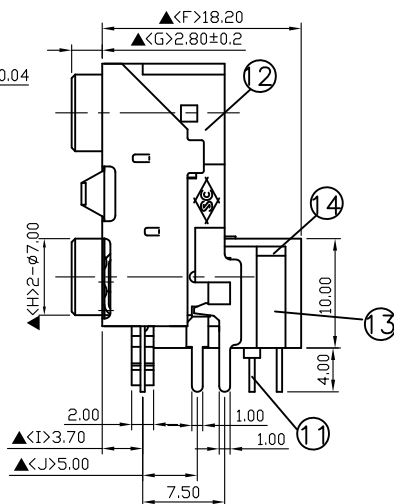
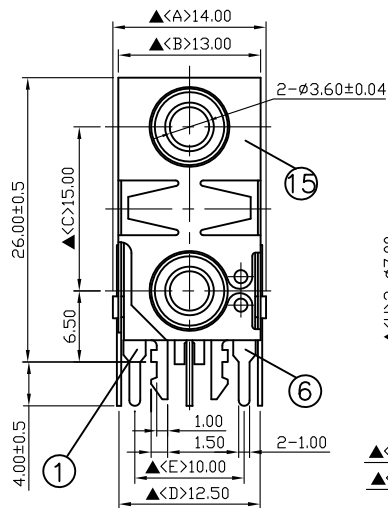




18.	Sequins	Tin Phosphor Bronze	2	
17.	Insulator	PA66+33%	1	Black Color
16.	Spring	SUS-304	1	
15.	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
14.	Back Housing Cover	PA66+33%	1	Transparent
13.	Back Housing	PA66+33%	1	Black Color
12.	Housing	PBT	1	Black Color
11.	Switch Pin	0.4T Brass	6	Silver Plated
10.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
9.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
8.	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
7.	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
6.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
5.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
4.	Break Terminal(DOWN)	0.4T Brass	1	Silver Plated
3.	Break Terminal(DOWN)	0.4T Brass	1	Silver Plated
2.	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

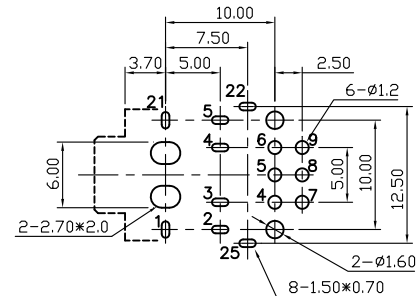

Pin Hole Layout
(Jack Bottom View)



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.03.2024	王放策			

For Redference
僅供參考

RoHS&SVHC
Compliant


PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER : SCJ352P00US0BNSG

VERSION:7.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : $30\text{m}\Omega$ max
Insulation Resistance : $100\text{M}\Omega$ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: $\blacktriangle$: The Most Important Dimension