

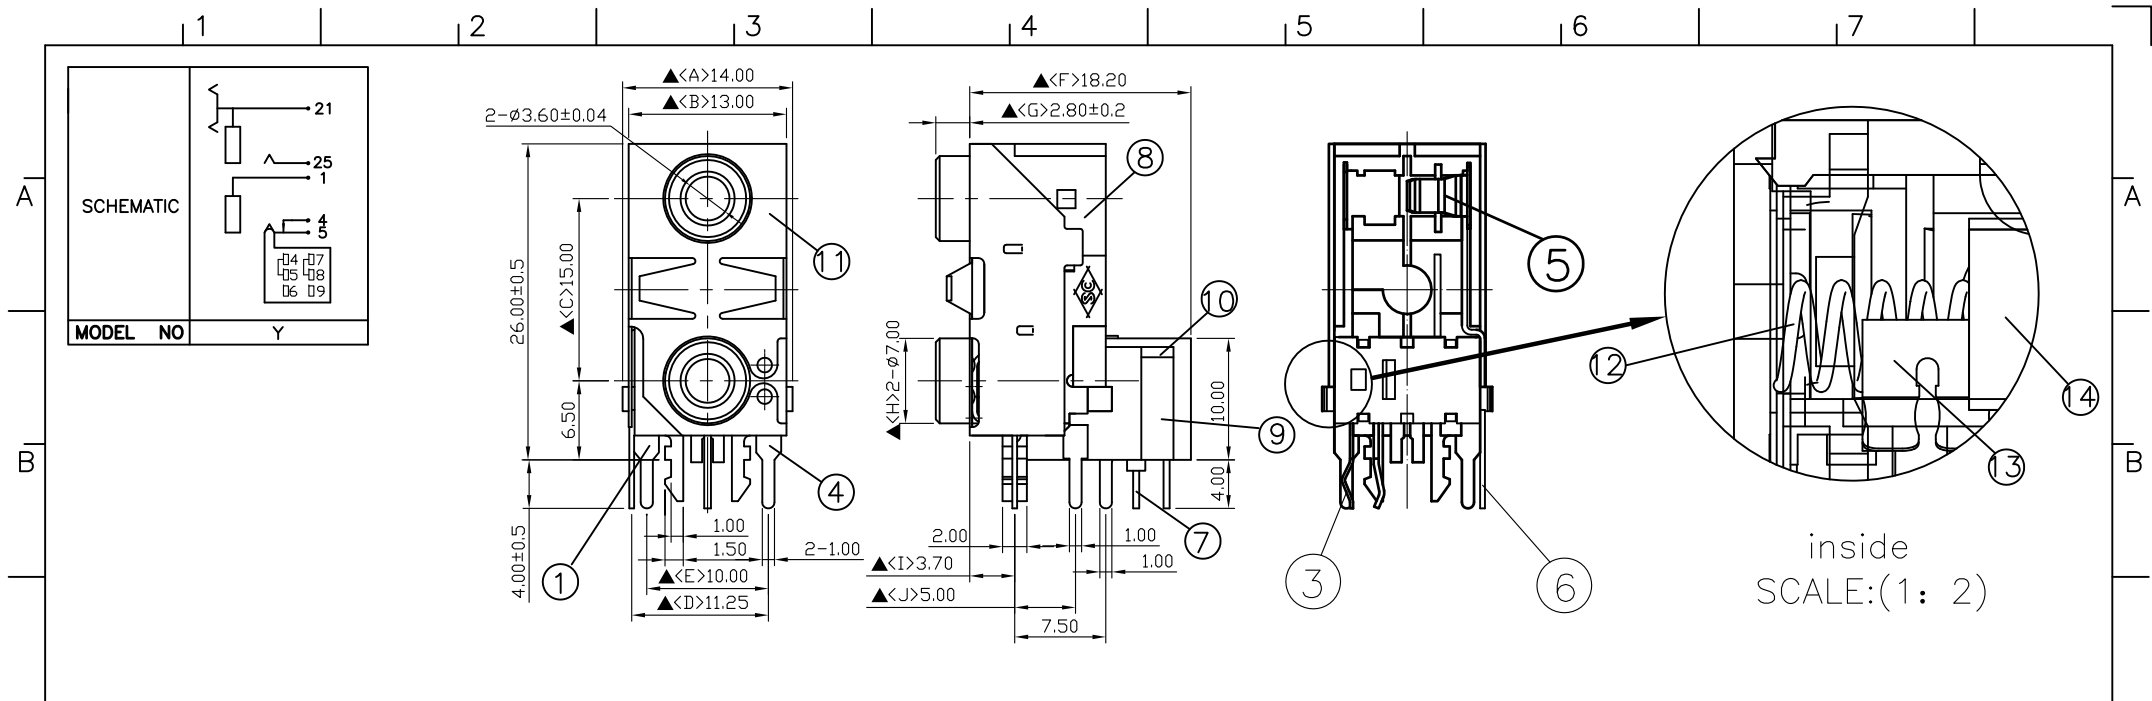


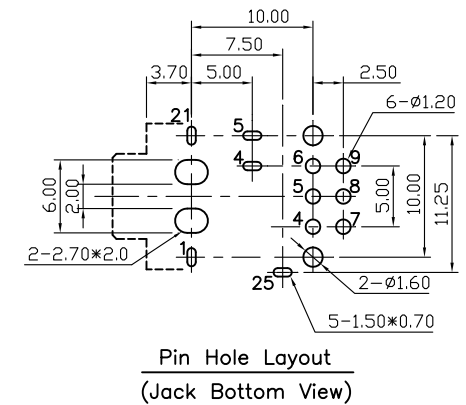

C

14.	Insulator	PA66+33%	1	Black Color
13.	Sequins	Tin Phosphor Bronze	2	
12.	Spring	SUS-304	1	
11.	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
10.	Back Housing Cover	PA66+33%	1	Transparent
9.	Back Housing	PA66+33%	1	Black Color
8.	Housing	PBT	1	Black Color
7.	Switch Pin	0.4T Brass	6	Silver Plated
6.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
5.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
4.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
3.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
2.	Break Terminal(DOWN)	0.4T Brass	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

D



E

 S.C. PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
旭 全		06.03.2024	王放策			
PART NAME : 3.5φ PHONE JACK		PART NUMBER : SCJ352P00YS0BNSG			VERSION:5.0	
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1	

SPECIFICATIONS:

Contact Resistance : 30mΩ max

Insulation Resistance : 100MΩ min. at DC 500V

Dielectric Withstand Voltage : AC 500V for one minute

Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant